
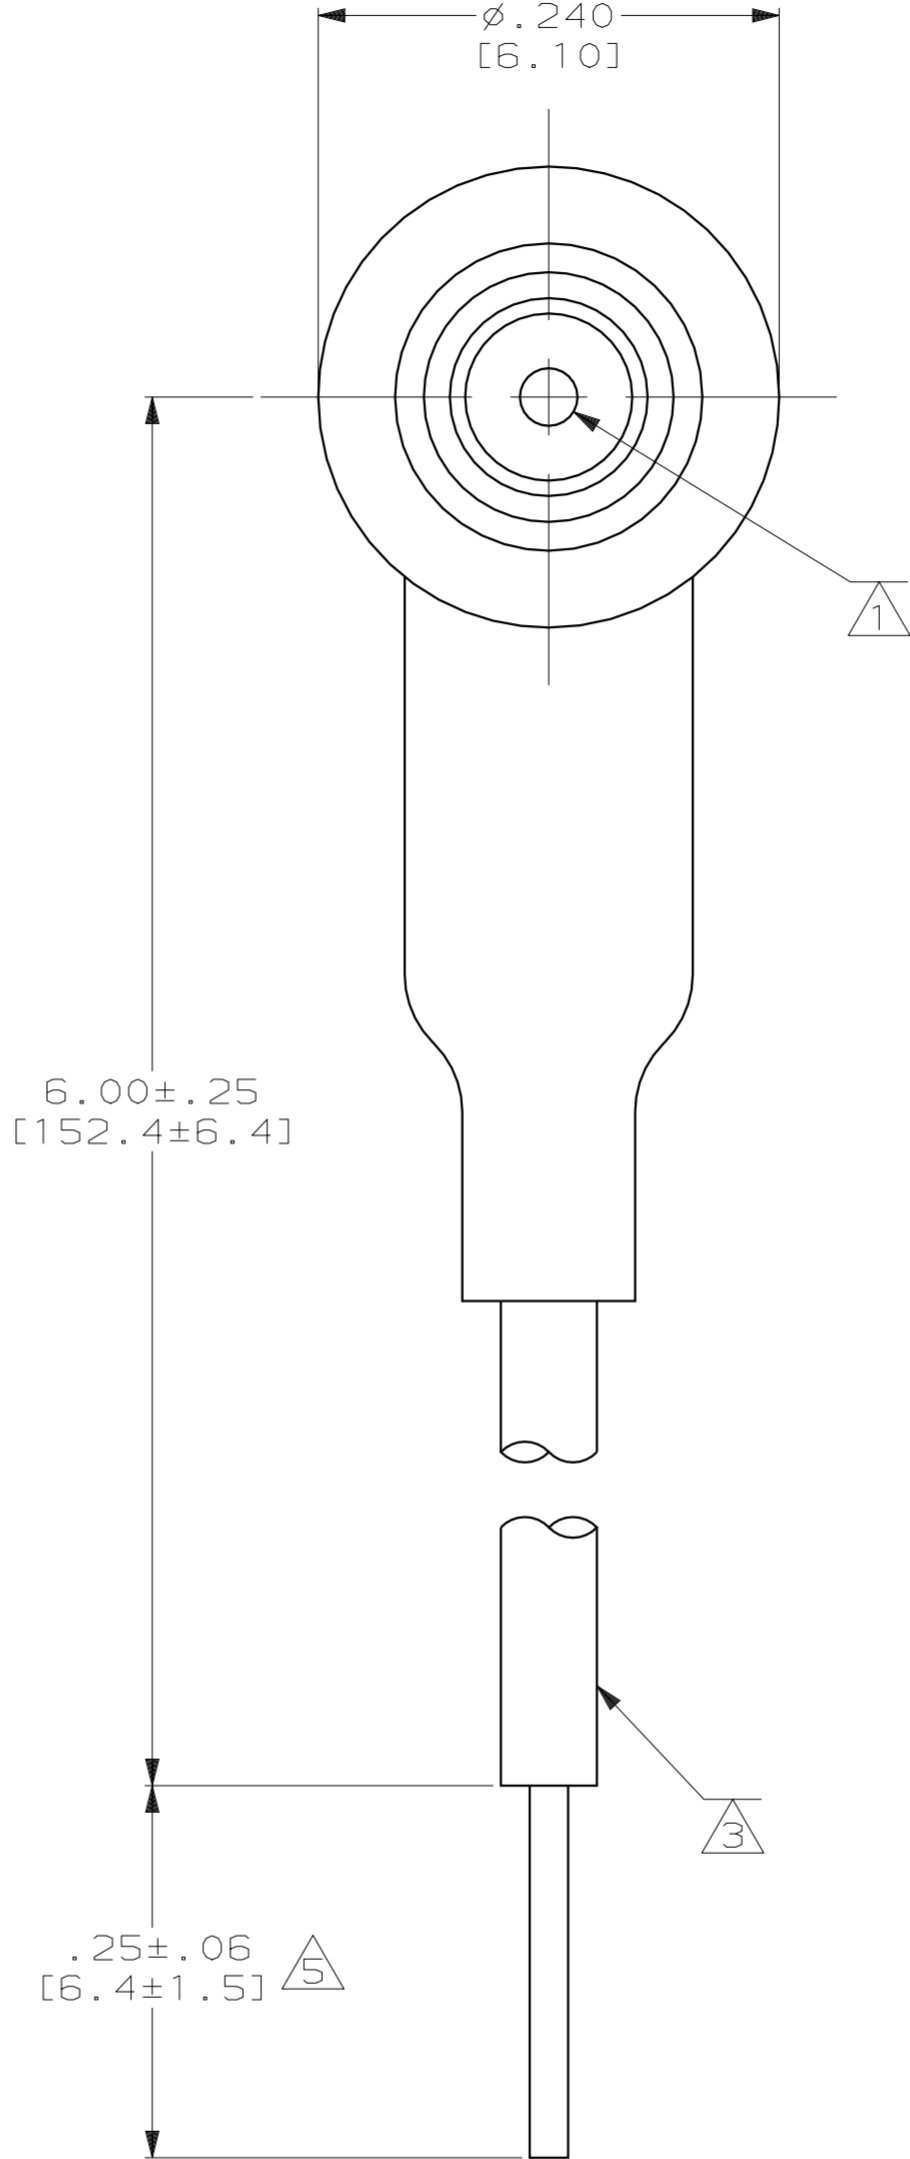


LOC	DIST	P	F	ZONE	LTR	DESCRIPTION	DATE	APPD
DF	50				C	REACTIVATE;OH14-0329-05 CT	7-21-05	DE

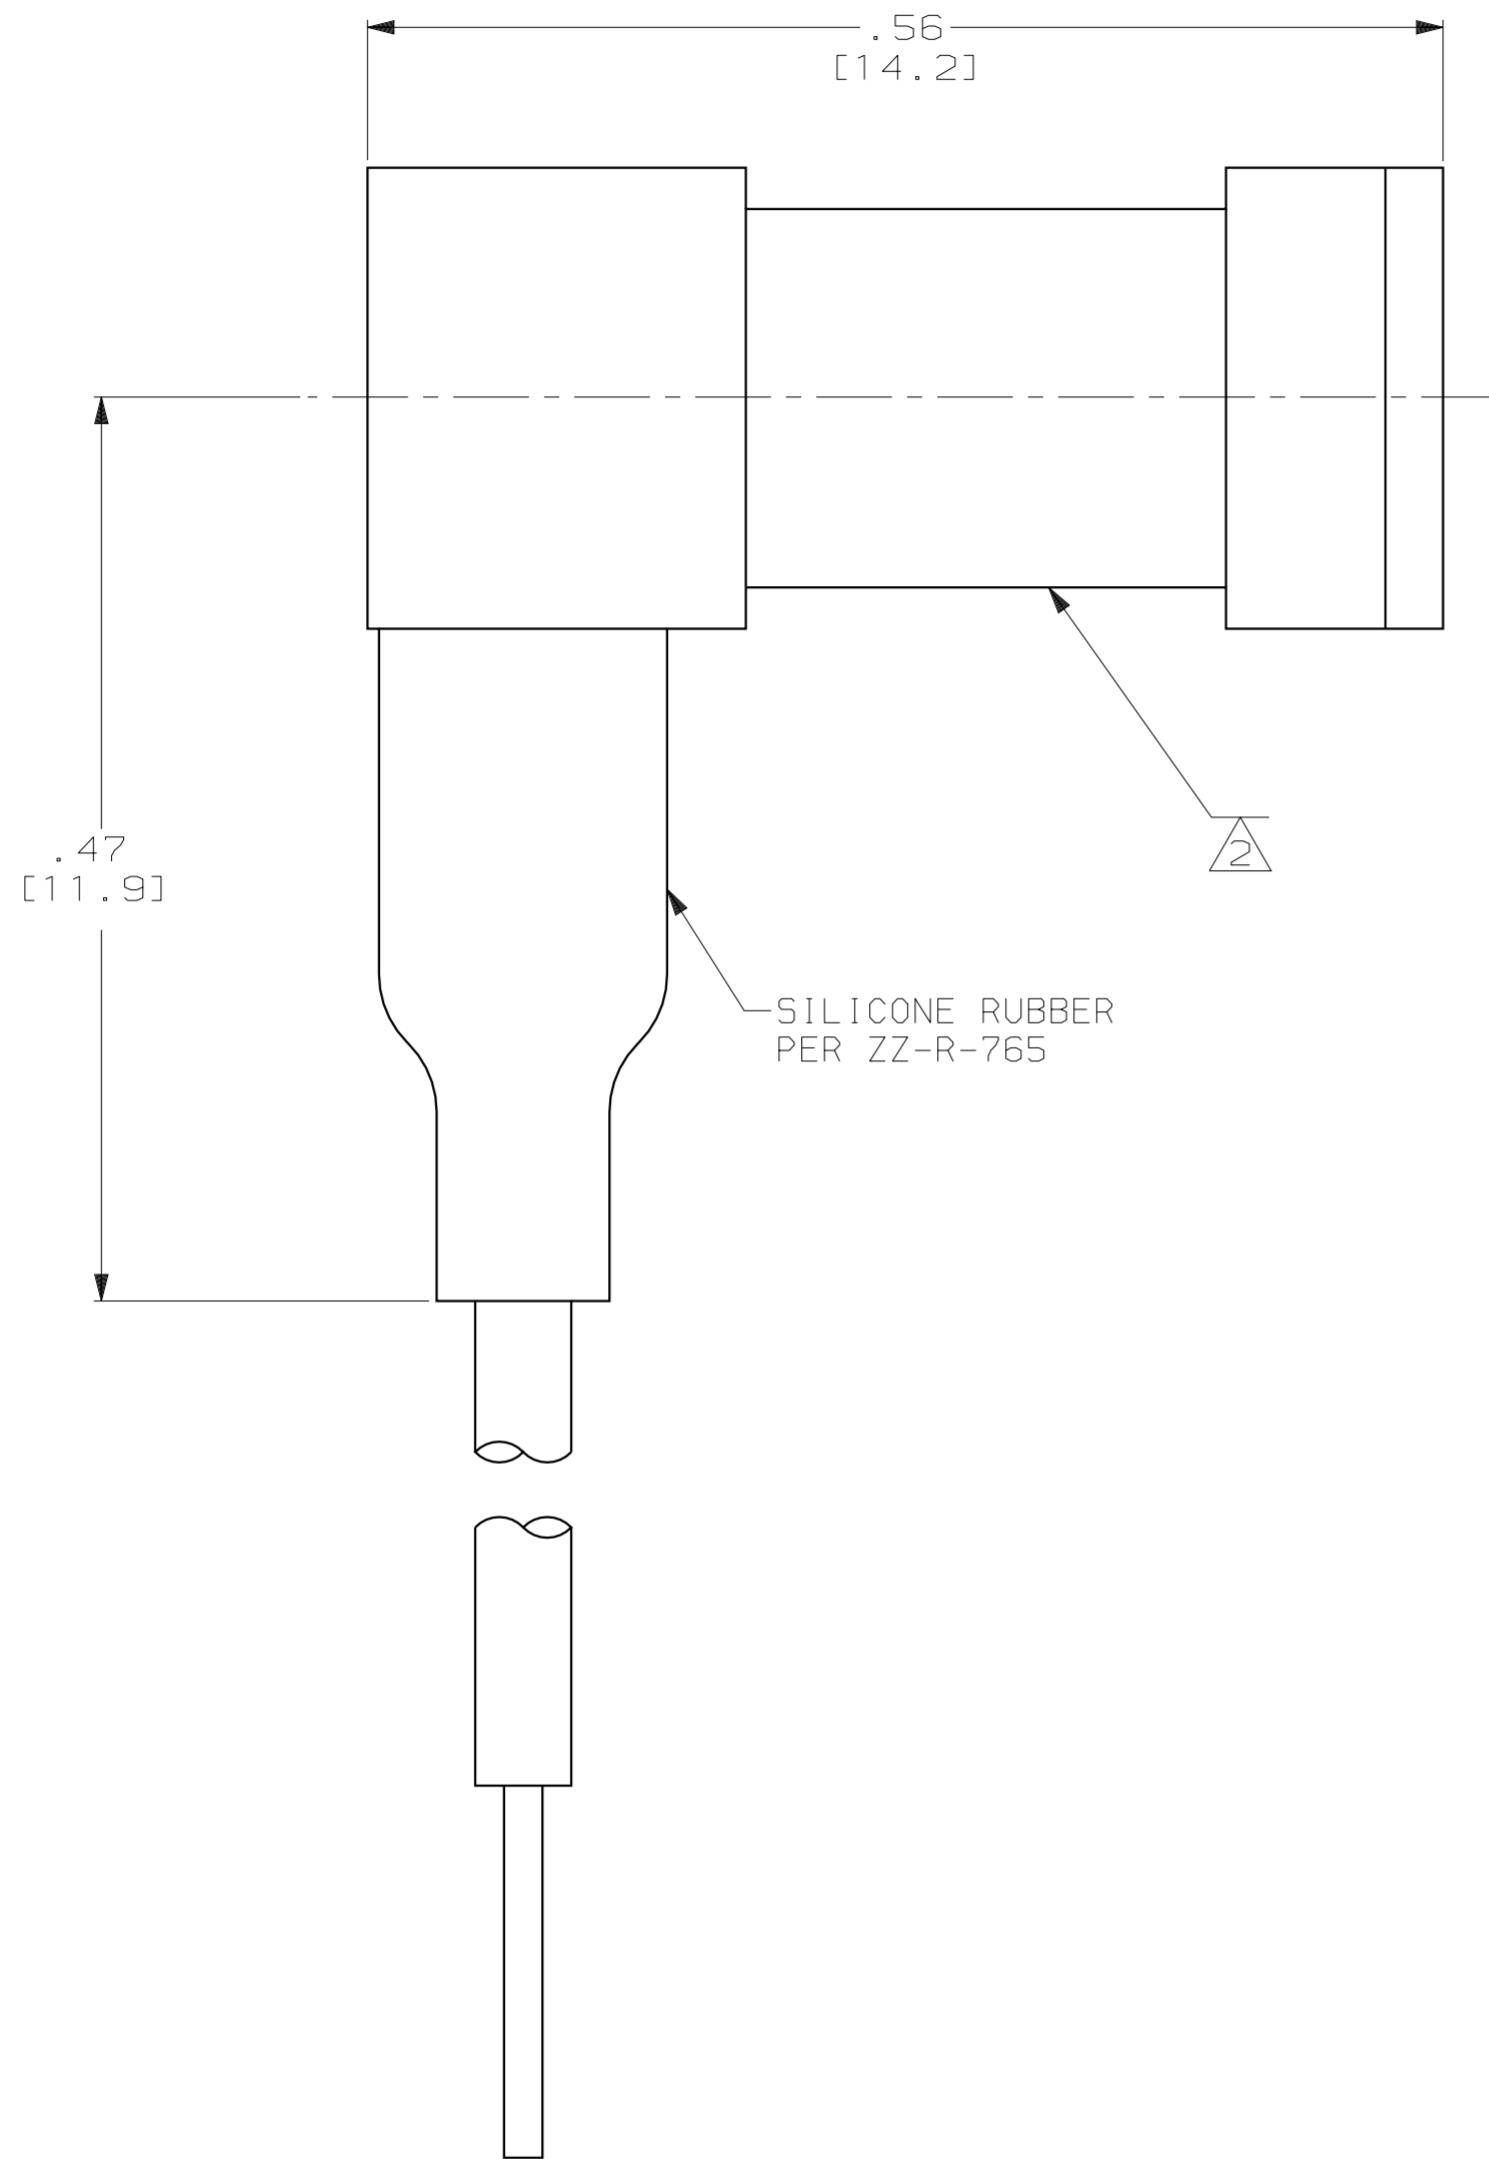

- ① SIZE 22 PIN CONTACT: .030 [0.76] DIA  
MAT'L: BRASS PER QQ-B-626.
- ② RECEPTACLE HOUSING:  
MAT'L: GLASS FILLED POLYETHERIMIDE RESIN.
- ③ CONDUCTOR:  
24 (19/36) AWG SILVER PLATED COPPER  
INSULATION: SILICONE COATED FEP;  $\phi .060 \pm .005 [1.52 \pm 0.13]$
- 4. OPERATING TEMP: -55°C TO +125°C  
TEST VOLTAGE: 18 KVDC AT 70,000 FT. ALTITUDE.  
OPERATING VOLTAGE: 12 KVDC AT 70,000 FT ALTITUDE.
- ⑤ PIGTAIL IS SOLDER DIPPED.

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN INCHES [mm] TOLERANCES ON : 2 PLC DEC $\pm .02 [0.5]$ 3 PLC DEC $\pm .005 [0.13]$ ANGLES $\pm -$	DR 5-3-93 C.C.THOMAS	AMP Incorporated Harrisburg, PA 17105-3608	
	CHK 1-11-95 D.EABY		
MATERIAL  SEE CALLOUTS	APPD 1-11-95 D.EABY	NAME RCPT. ASSY, MICRO SUB-MINIATURE, RIGHT ANGLE, LGH	
	RLSE 9-3-02 C.C.THOMAS	PRODUCT SPEC -	
FINISH  SEE CALLOUTS	APPLICATION SPEC -	SIZE C 00779	CAGE CODE C=448659
	WEIGHT -	SCALE 10:1	DRAWING NO C=448659
		SHEET 1 OF 1	

448659-1  
PART NO.