
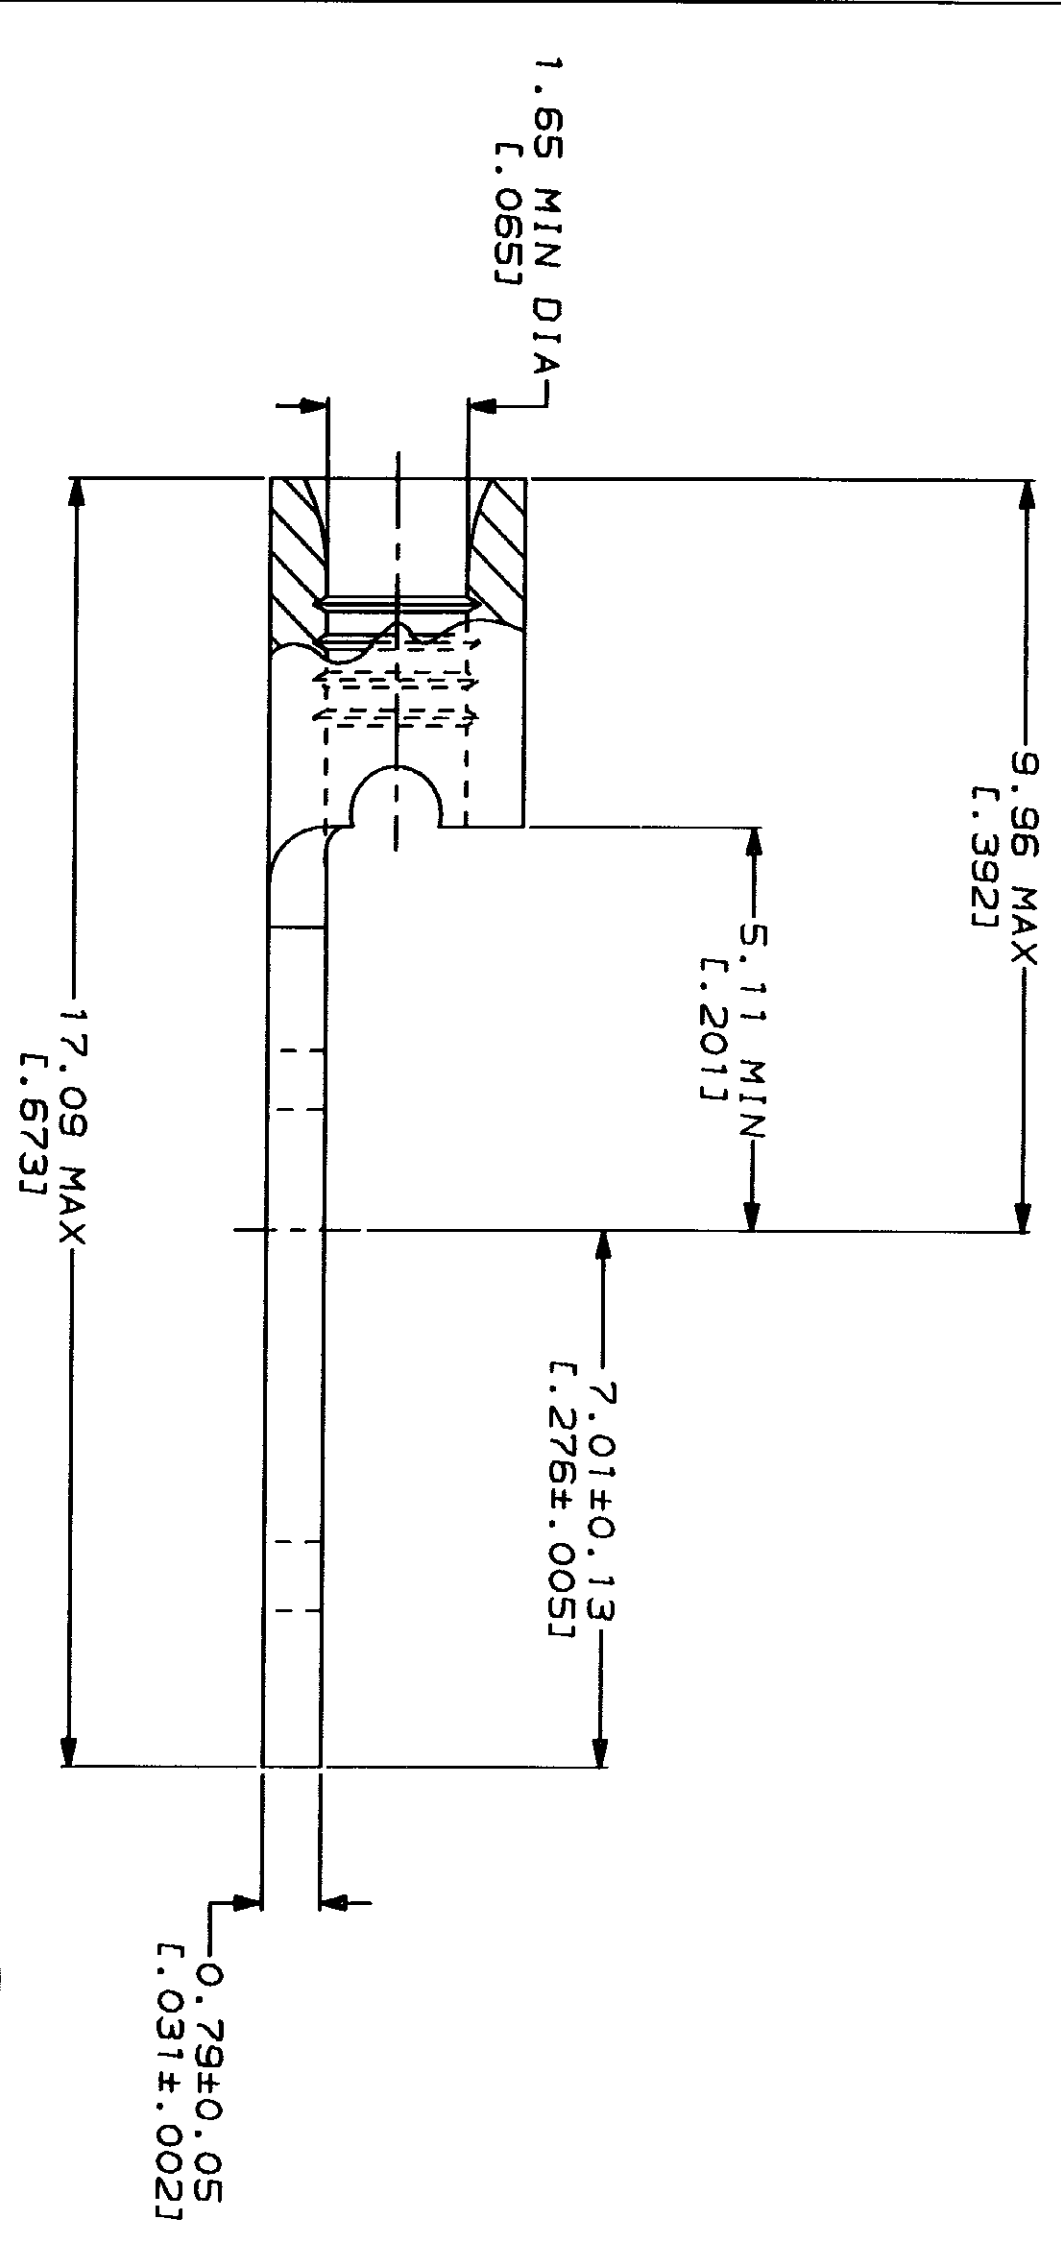


AMP WIRE RANGE	UL E13288 Listed
22-16 AWG STRANDED	22-16 AWG STRANDED
LR7189 Certified	MILITARY P/N AND CLASS
NOT CERTIFIED	NOT APPLICABLE

STAMP 4S AMP 22-18* APPROX AS SHOWN
 22-16 TERMINALS ARE STAMPED 22-18 IN
 ACCORDANCE WITH MILITARY SPECIFICATION
 MIL-T-7928, COMMERCIAL WIRE RANGE IS 22-16
 4S INDICATES STUD SIZE

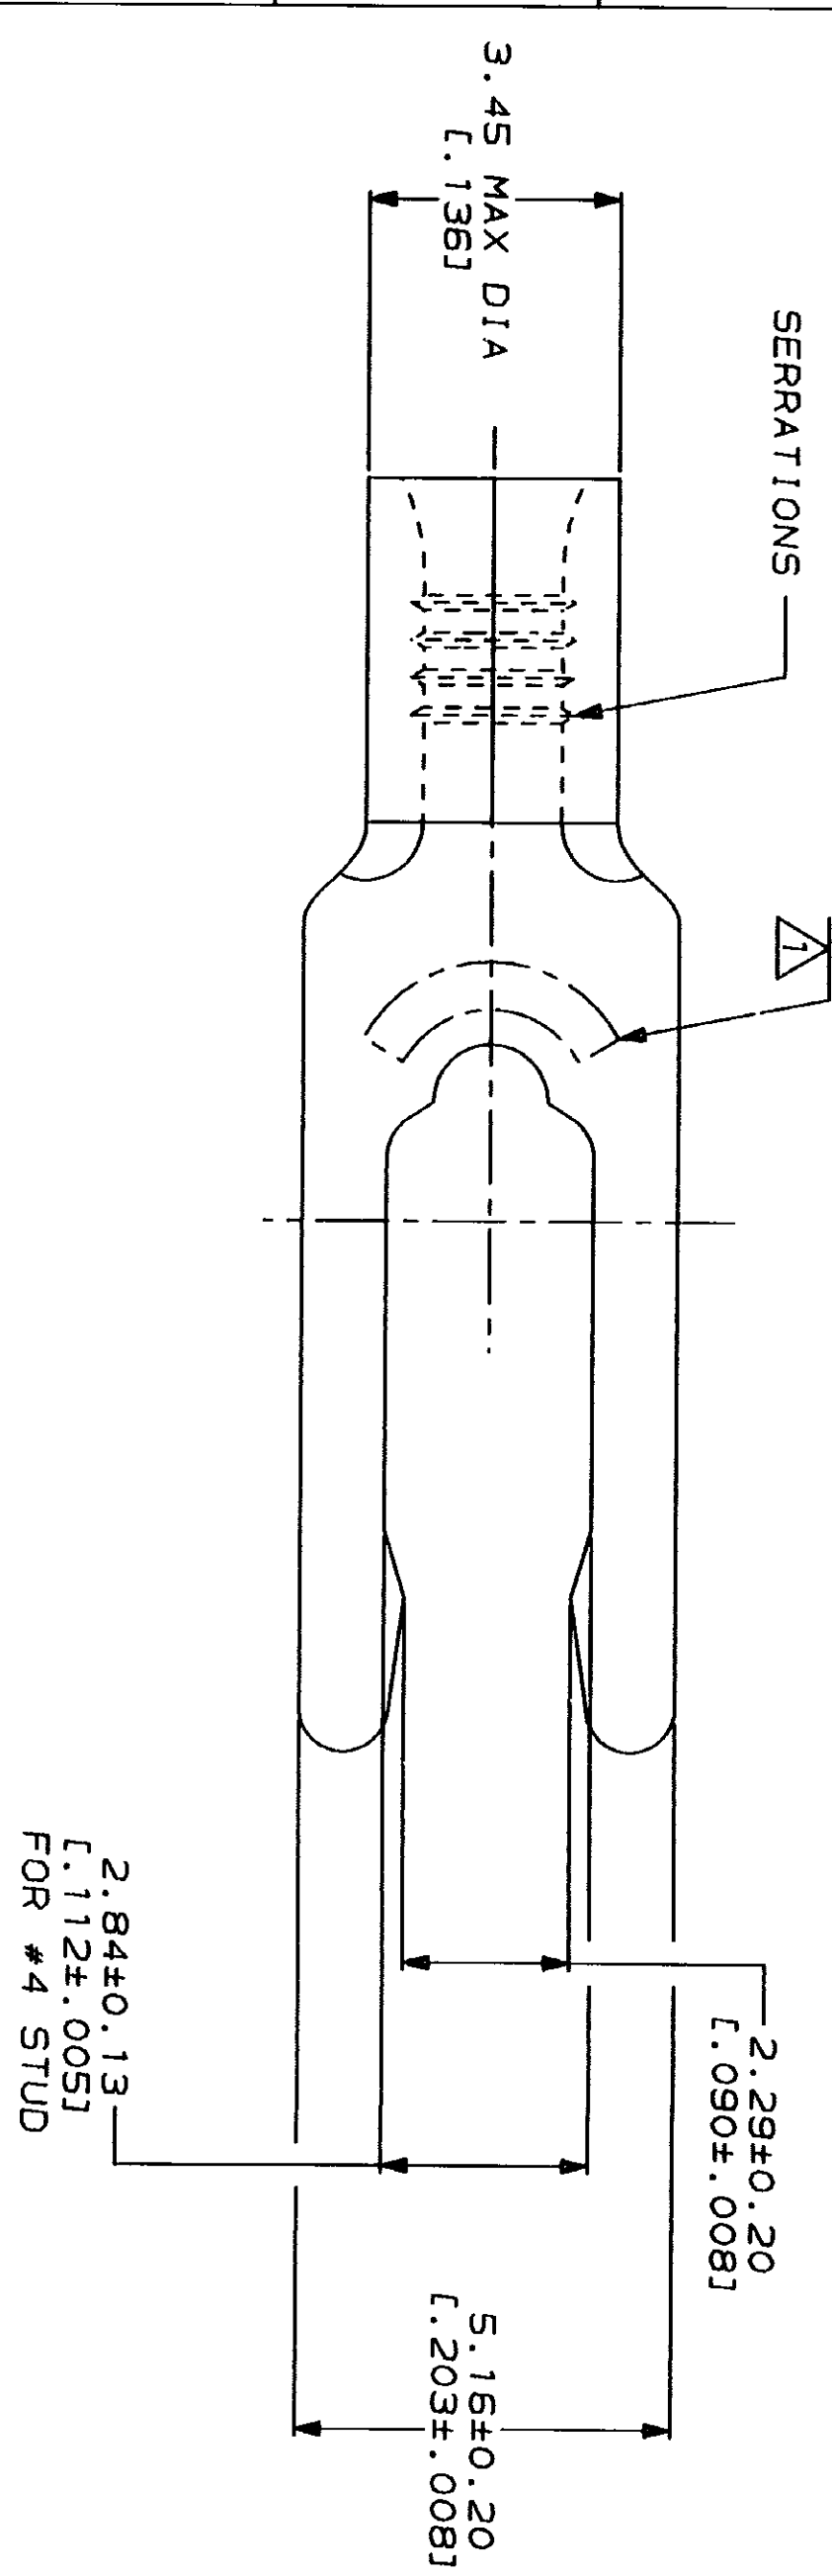

AMP INCORPORATED
 CUSTOMER SERVICE SYSTEMS

FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752	MAX RECOMMENDED OPERATING TEMPERATURE: 170°C MAX	DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm FINISHES TOLERANCES ON: 2 PLG DEC ± .1 3 PLG DEC ± .1 ANGLES MATERIAL
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111		
FOR ORDER ENTRY	1-800-526-5142	VOLTAGE RATING: NOT APPLICABLE	FINISH TIN PLATE 0.00254 [L.000100] MIN THK PER MIL-T-10727

AMP 1471-S REV 3-82	09:36:04	amp26463	/f:/lee/dept123/dwg123/u_bodies/u_22-16
DR 2-15-93 TA BRINKMAN	CHK 2-15-93 DA PATTERSON	APPD 2-15-93 DE MILLER	APPD 2-15-93 JL HECKLEY
NAME AMP Amp Incorporated Harrisburg, PA 17105-3608	SIZE CAGE CODE 00779	DRAWING NO G=53047	SHEET 1 OF 1