


REVISIONS				
P	LTR	DESCRIPTION	DATE	APVD
	C2	REV PER ECN-22-156403	03JUN2022	RK CSD

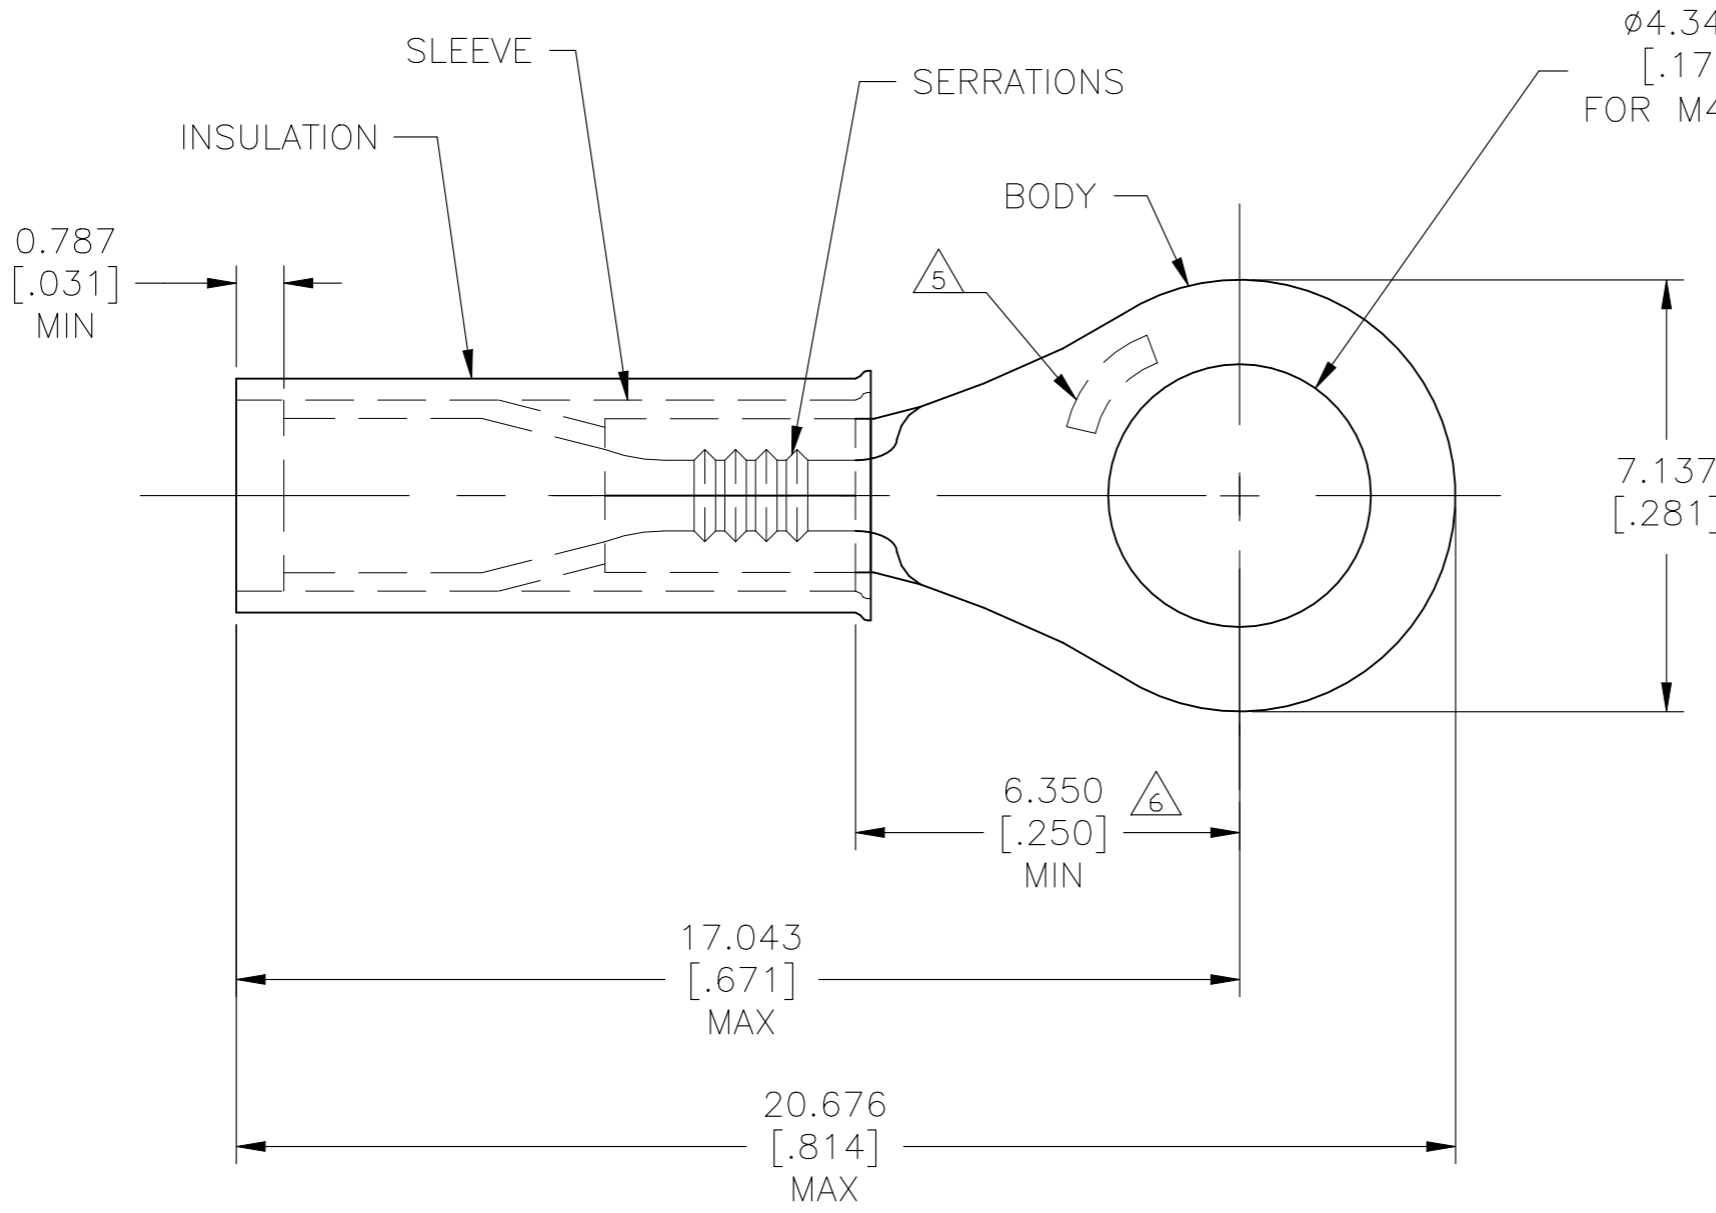

- 1 BODY MATERIAL THK IS 0.685±0.025 [.027±.001]
- 2 FOR 1.270[.050] TO 2.667[.105] WIRE INS. DIA.
- 3 MUST BE CRIMPED WITH 22-18 OR 22-16 PIDG (RED) TOOL.
- △4 MEETS MS25036-146 CLASS 1
- △5 STAMP "AMP" APPROX AS SHOWN
- △6 APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- △7 MATERIAL: BODY & SLEEVE- COPPER PER ASTM B152  
INSULATION: NYLON PER ASTM D4066, TYPE I
- △8 FINISH: BODY & SLEEVE- TIN PLATE 0.00254[.000100] MIN EXT THK PER ASTM B545  
INSULATION: COLOR YELLOW

△4	1000	LOOSE PIECE	54311-1
	QTY	PACKAGE TYPE	PART NO

AMP INCORPORATED  
CUSTOMER SERVICE SYSTEMS

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN	JR RUTH	27JAN04
CHK	T MICHIELUTTI	27JAN04
APVD	T MICHIELUTTI	27JAN04



FOR ADDITIONAL PRODUCT INFORMATION OR COPIES OF DRAWINGS AND TECHNICAL DOCUMENTS	PRODUCT INFORMATION CENTER 1-800-522-6752
FOR APPLICATION TOOLING INFORMATION	TOOLING ASSISTANCE CENTER 1-800-722-1111
FOR ORDER ENTRY	1-800-526-5142

MAX RECOMMENDED OPERATING TEMPERATURE: 105°C [221°F]
VOLTAGE RATING: N/A
WIRE CROSS SECTIONAL AREA RANGE, 0.12-0.24mm²[238-475] CIR MILS

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± 0.127[.005]
	4 PLC ± -
	ANGLES ± 1°
MATERIAL △7	FINISH △8

PRODUCT SPEC	-
APPLICATION SPEC	114-2157
WEIGHT	-
CUSTOMER DRAWING	

NAME TERMINAL, NYLON PIDG, RING TONGUE; WIRE SIZE 26-24 AWG			
SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-54311	-
SCALE 8:1		SHEET 1 OF 1	REV C2