

4


3

2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GA	1		D	PER LC20-0035-12 / ECO-12-007215	11APR2012	DM	BJ

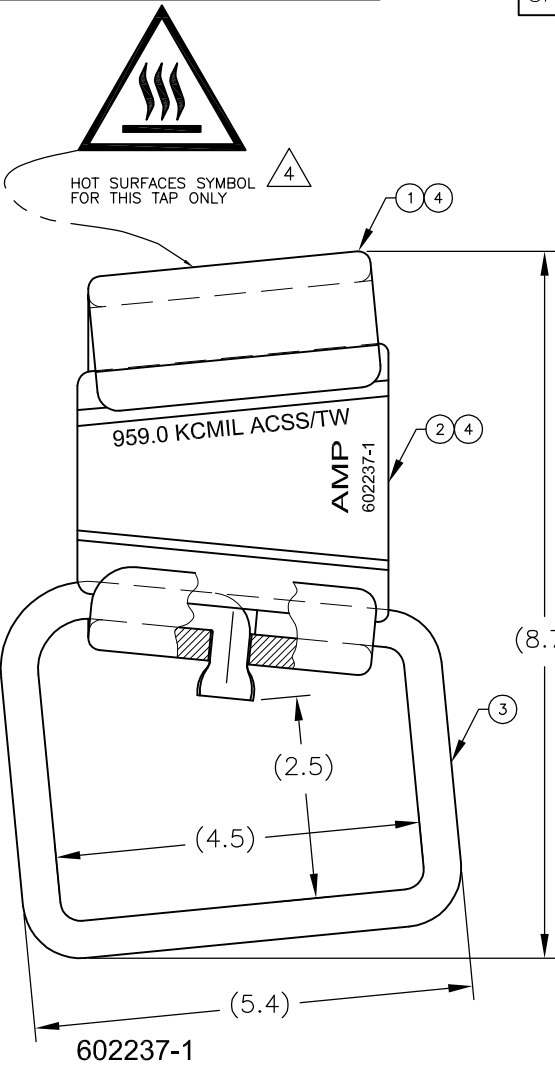

1. WIRE SIZES ARE MARKED ON WEDGE.
2. INHIBITOR IS APPLIED AT FACTORY, TO GROOVES OF WEDGE AND C BODY.
3. DIMENSIONS ARE FOR REFERENCE ONLY.
4. 602237-1 TAP CONNECTOR IS FOR HIGH TEMPERATURE APPLICATION. HOT SURFACES SYMBOL AS PER IEC 417 IS INK STAMPED ON CONNECTOR BODY.
5. USE YELLOW SHELL NO. 69338-4.

A/R		DESCRIPTION	ITEM NO
-	-	HIGH TEMPERATURE SYNTHETIC	4
1	1	AMPACT BAIL, TIN PLATED, 4/0 AWG	3
1	-	AMPACT, 795 KCMIL	2
-	1	AMPACT, 1033.5 KCMIL	
1	-	AMPACT, 795 KCMIL	1
-	1	AMPACT, 1033.5 KCMIL	
-1	-	DESCRIPTION	ITEM NO
QTY PER ASSY		PARTS LIST	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. MURUGIAH 11APR2012	TE Connectivity		
DIMENSIONS: INCHES		CHK B. JOHNSON 20APR2012			
		APVD B. JOHNSON 20APR2012	NAME STIRRUP ASSEMBLY, YELLOW CODED, 4/0 AWG BAIL, AMPACT		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ±.03 3 PLC ±.005 4 PLC ± ANGLES ±0.5°		PRODUCT SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C=602237
MATERIAL SEE BOM		FINISH -	WEIGHT -	RESTRICTED TO -	
CUSTOMER DRAWING			SCALE NTS	SHEET 1 OF 1	REV D