

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	E1	REVISED PER ECN-23-215330	24JUL2023	RK	MF

NUMMER 829 033

VERWENDET FÜR

WAR NR. E-87-9102

POLZ. PRO REIHE	L±0.5	BESTELL-NR.		
-	-	-		
2	5.08	-2	OBSOLETE	
3	7.62	-3	OBSOLETE	
4	10.16	-4	OBSOLETE	
5	12.70	-5	OBSOLETE	
6	15.24	-6	△	
7	17.78	829 033 -7	OBSOLETE	
8	20.32	-8	OBSOLETE	
9	22.86	-9	OBSOLETE	
10	25.40	-10	OBSOLETE	
11	27.94	1-	-1	OBSOLETE
12	30.48	1-	-2	OBSOLETE
13	33.02	1-	-3	△
14	35.56	1-	-4	OBSOLETE
15	38.10	1-	-5	OBSOLETE
16	40.64	1-	-6	OBSOLETE
17	43.18	1-	-7	△
18	45.72	1-	-8	OBSOLETE
19	48.26	1-	-9	OBSOLETE
20	50.80	2-	-0	
21	53.34	2-	-1	△
22	55.88	2-	-2	OBSOLETE
23	58.42	2-	-3	OBSOLETE
24	60.96	2-	-4	
25	63.50	2-	-5	
26	66.04	2-	-6	OBSOLETE
27	68.58	2-	-7	
28	71.12	2-	-8	△
29	73.66	2-	-9	OBSOLETE
30	76.20	3-	-0	OBSOLETE
31	78.74	3-	-1	
32	81.28	3-	-2	
33	83.82	3-	-3	
34	86.36	3-	-4	
35	88.90	3-	-5	
36	91.44	3-	-6	△
37	93.98	3-	-7	
38	96.52	3-	-8	
39	99.06	3-	-9	
40	101.60	4-	-0	
41	104.14	4-	-1	
42	106.68	4-	-2	
43	109.22	4-	-3	
44	111.76	4-	-4	
45	114.30	4-	-5	
46	116.84	4-	-6	OBSOLETE
47	119.38	4-	-7	
48	121.92	4-	-8	
49	124.46	4-	-9	
50	127.00	5- 829 033 -0	OBSOLETE	

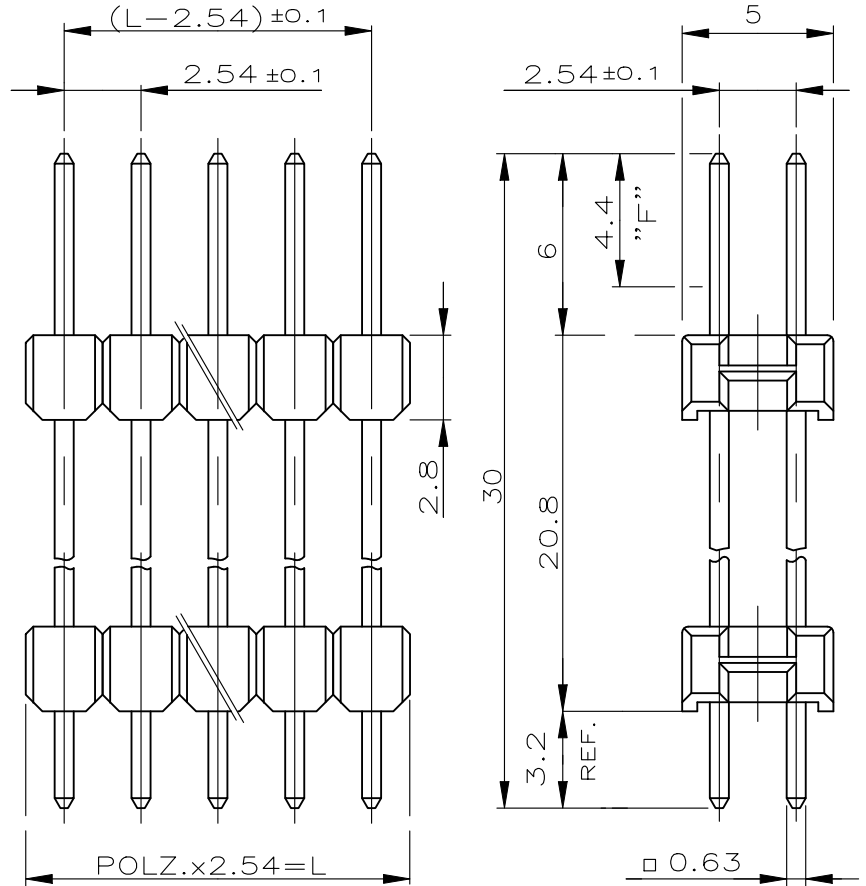

- △ 1 STECKSEITE: IM BEREICH "F" 0.7 μm PdNi + 0.1 μm GOLD FLASH ÜBER 1.27 μm Ni
- △ 1 LÖTSEITE: MIN. 2.5 μm ZINN ÜBER 1.27 μm Ni
- △ 2 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

CAD-ORIGINAL  
ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	△ 1
STIFTGEHÄUSE	PBTP-GV	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90...

TE Connectivity. All Rights Reserved.

DIMENSIONS: mm	DWN	12.03.87	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	19.03.87	TE Connectivity			
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	-				
±0.2 mm	PRODUCT SPEC	108-18012	NAME			
0 PLC ± -	APPLICATION SPEC	-	SPEZ. AMPMODU II STIFTLISTE ZWEIREIHIG			
1 PLC ± -	WEIGHT	-	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
2 PLC ± -			A4	00779	C-829033	-
3 PLC ± -			CUSTOMER DRAWING			
4 PLC ± -			SCALE	4:1	SHEET	1 OF 1
ANGLES ± -					REV	E1