


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	F	UPDATED THE PLATING IN NOTE 1	15FEB2024	SP	KJK

NUMMER 829309
 VERWENDET FÜR
 WAR NR. E88-52544

POLZ. PRO REIHE	L±0.4	BESTELL-NR.
-	-	-
2	5.08	2-2
3	7.62	3-3
4	10.16	4-3
5	12.70	5-829-309-5
6	15.24	6-3
7	17.78	7-3
8	20.32	8-3
9	22.86	9-3
10	25.40	1-0
11	27.94	1-1
12	30.48	1-2
13	33.02	1-3
14	35.56	1-4
15	38.10	1--5
16	40.64	1--6
17	43.18	1--7
18	45.72	1--8
19	48.26	1--9
20	50.80	2--0
21	53.34	2--1
22	55.88	2--2
23	58.42	2--3
24	60.96	2--4
25	63.50	2--5
26	66.04	2--6
27	68.58	2--7
28	71.12	2--8
29	73.66	2--9
30	76.20	3--0
31	78.74	3--1
32	81.28	3--2
33	83.82	3--3
34	86.36	3--4
35	88.90	3--5
36	91.44	3--6
37	93.98	3--7
38	96.52	3--8
39	99.06	3--9
40	101.60	4--0
41	104.14	4--1
42	106.68	4--2
43	109.22	4--3
44	111.76	4--4
45	114.30	4--5
46	116.84	4--6
47	119.38	4--7
48	121.92	4--8
49	124.46	4--9
50	127.00	5-829-309-0

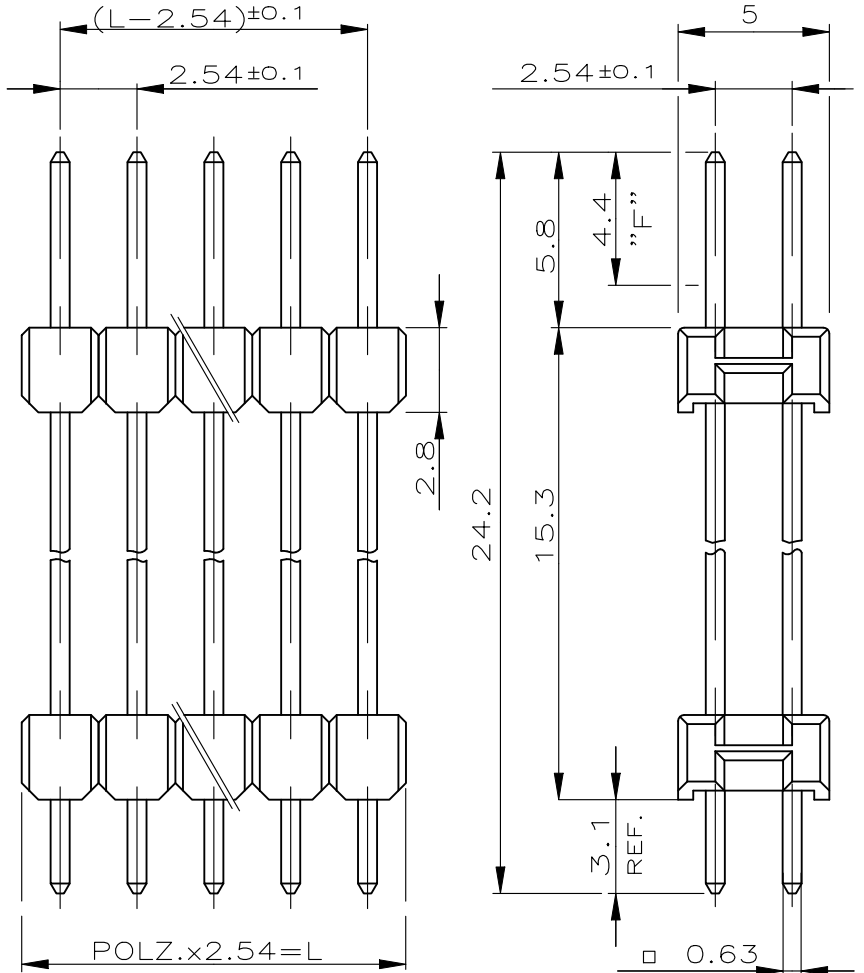

- 1 Min. 0.76µm (PdNi + Au Flash) by area "F" over Min. 1.27µm NICKEL. (Alternative plating - Min 0.76µm Au by area "F" over Min 1.27µm Nickel)
- 2 OBSOLETE PARTS; OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 3 OBSOLETE

CAD-ORIGINAL
 ZEICHNUNG NICHT ÄNDERN

KONTAKTSTIFT	CuZn	1
STIFTGEHÄUSE	PBT	GRÜN
BENENNUNG	WERKSTOFF	OBERFLÄCHE FARBE

ZEICHNUNG GÜLTIG AB 26/90...

TE Connectivity. All Rights Reserved. 2024



DIMENSIONS: mm	DWN	17.07.89	MATERIAL	SEE TABLE	FINISH	SEE TABLE
	CHK	G.Holous				
TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	M.Schaarschmidt				
0 PLC ±0.2 mm 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -	PRODUCT SPEC	108-18012	NAME	SPEZ. AMPMODU II STIFTLISTE ZWEIREIHIG		
	APPLICATION SPEC		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
	WEIGHT		A4	00779	C-829309	
CUSTOMER DRAWING		SCALE	4:1	SHEET	1 OF 1	REV F

