

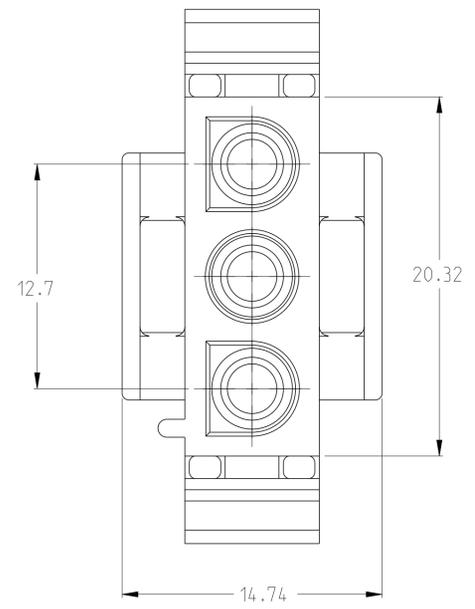
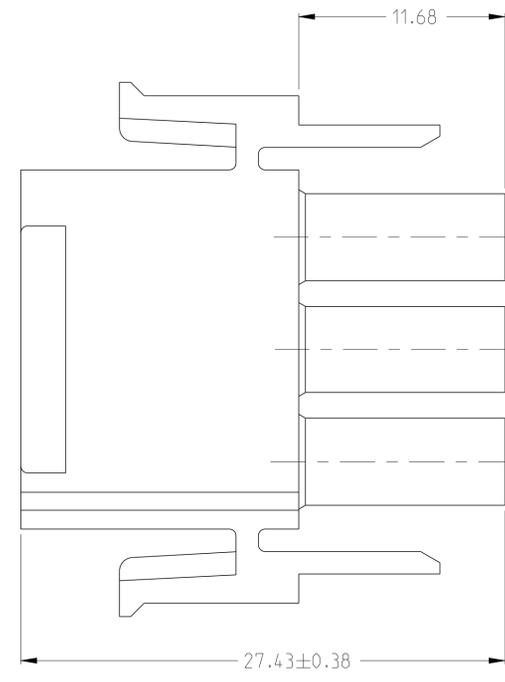
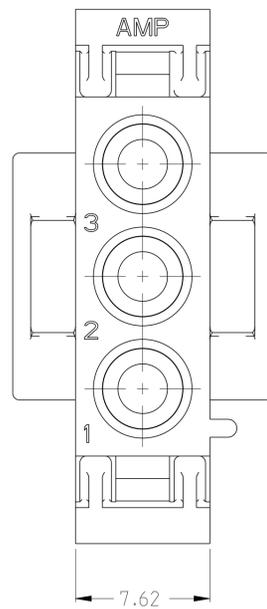


LOC		DIST		REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD		
B1		REVISED PER ECR-17-014951	16OCT2017	BDA	KR		
B2		REVISED PER ECR-19-016074	18DEC2019	BDA	SF		

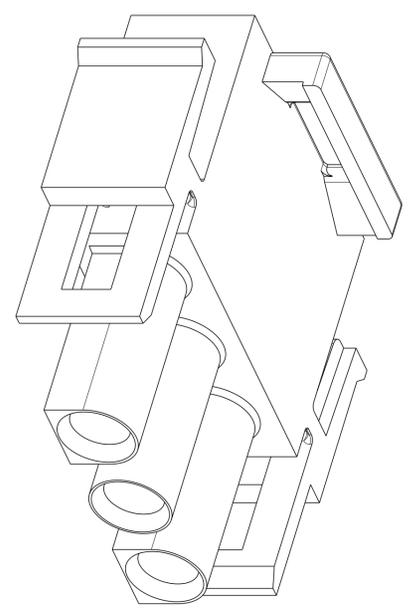

- MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK CAP OR HEADER
 - SMALL NICKS ARE PERMITTED ON THE CIRCUIT TOWERS WHICH COULD INCREASE THE INITIAL HOUSING MATING FORCE BY UP TO 4.4 NEWTONS (1.0 LBS). NO INDIVIDUAL NICKED TOWER SHALL INCREASE THIS FORCE BY OVER 2.2 NEWTONS (0.5 LBS)
 - DIMENSIONS SHOWN REPRESENT PRODUCT IN DRY, AS MOLDED, CONDITION. ADDITIONAL 2% GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR AND SHOULD BE ACCOUNTED FOR.
 - DELIVERY STATUS
BULK PACKING IN CORRUGATED SHIPPING BOX PN 973058-3
- ⚠ COLOR OF HOUSINGS MAY RANGE FROM CLEAR TO GREEN OR YELLOW DUE TO HYGROSCOPIC NATURE OF RESIN. HOWEVER IT DOESN'T AFFECT THE FORM, FIT AND FUNCTION OF THE PRODUCT.

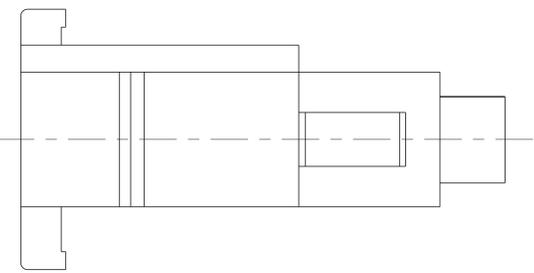

REMARK	PA 66 UL94 V-2 NATURAL	969326-1
	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Fraveren, K	27-APR-07	TE Connectivity
		CHK W. Hoffmann	20-JUL-07	
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME
mm	0 PLC ± -	1. Geilach		PLUG.3 CIRCUIT, UNIVERSAL MATE-N-LOCK
	1 PLC ± 0.2	APVD		PRODUCT SPEC
	2 PLC ± 0.2	108-1031		APPLICATION SPEC
	3 PLC ± 0.2	116-1010		SIZE
	4 PLC ± 0.2	WEIGHT		CAGE CODE
	ANGLES ± 1°	CUSTOMER DRAWING		DRAWING NO
MATERIAL SEE TABLE	FINISH	SCALE		RESTRICTED TO
		5:1		1 OF 1
				REV: B2