




CATALOGUE NUMBER: FAD1855-1935-8 SUITS CONDUCTOR

DEADEND

STRANDING/CONDUCTOR	COND. TYPE	DIAMETER	FITTING LAY
19/3.75	AAC/AAAC	18.75	RIGHT HAND
19/0.149	AAC/AAAC	18.92	RIGHT HAND
COVERED CONDUCTOR XPLE	AAC/AAAC	18.55-19.35	RIGHT HAND

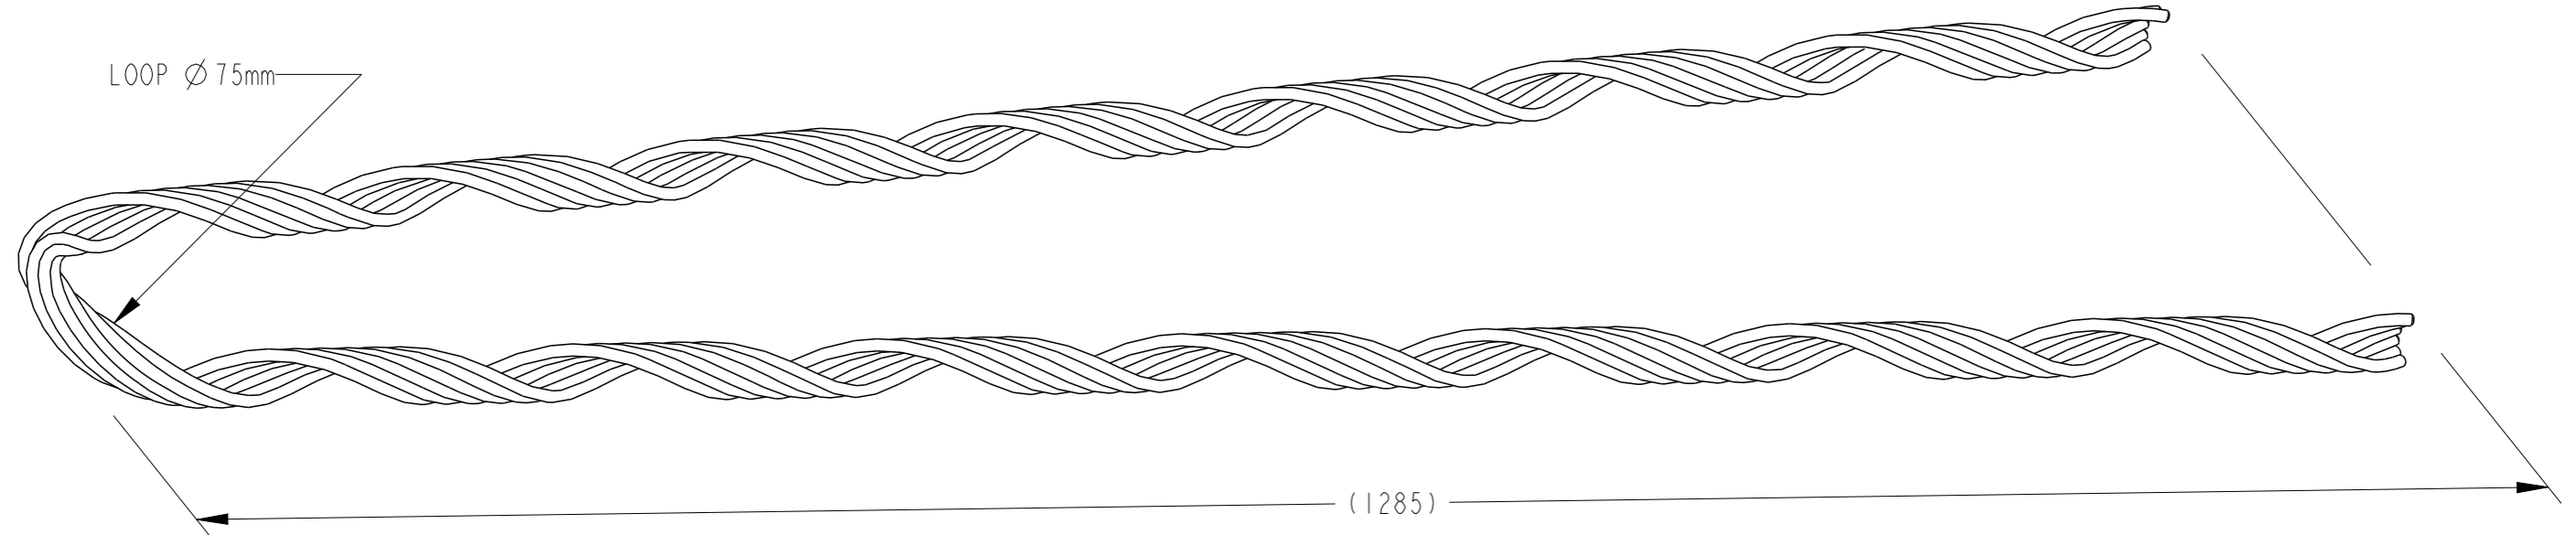

TECHNICAL SPECIFICATIONS:

CATALOGUE NUMBER: FAD1855-1935-8
 DESCRIPTION: FULL-TENSION ALUMINIUM DEADEND
 MATERIAL: ALUMINIUM ALLOY
 NUMBER OF RODS: 6
 ROD DIAMETER: 4.87mm
 OVERAL LENGTH: 1285mm
 END FINISH: BALLENDDED
 FITTING LAY DIRECTION: RIGHT HAND
 COLOUR CODED: BLACK

BOX LABEL

P/N: FAD1855-1935-8
 ID:
 DESCRIPTION:
FULL-TENSION ALUMINIUM DEADEND
 19/3.75 AAC/AAAC
 19/0.149 AAC/AAAC
 XLPE 18.55-19.35
 RANGE: 18.55 - 19.35
 COLOUR-CODE: **BLACK**
 QTY: 10 WEIGHT: BATCH:

PRODUCT LABEL

FAD1855-1935-8
 19/3.75 AAC/AAAC
 19/0.149 AAC/AAAC
 XLPE 18.55-19.35

WEIGHT: 0.84kg
 BATCH NO:
 MONTH/YEAR:

LOC								IMPLIED NOTES BURRS AND SHARP EDGES REMOVED SCREW THREADS ARE TO AS 1275 DO NOT WORK TO DIMS MARKED REF SURFACE FINISH 6.3 U.N.O. DIMS ARE IN mm. DO NOT SCALE	IMPLIED TOLERANCES HOLE DIA AND LOCATIONS: ±0.5mm. DIMENSIONS UP TO 30mm: ±1.5mm. DIMENSIONS OVER 30mm: ±5%. UP TO A MAX OF: ±5mm. ANGULAR DIMENSIONS: ±5°.	TCPN - PART Alias UTX/DUL FAD1855-1935-8 Cat No FAD1855-1935-8	TITLE FULL-TENSION ALUMINIUM DEADEND (FAD) FITTING COND. RANGE: Ø 18.55-Ø 19.35 19/3.75 & 19/0.149 AAC/AAAC XLPE 18.55-19.35	DRAWN RN CHECKED MN	DATE 15-05-2013 APPROVED AT	TE Connectivity 2/3 Corella Close Berkeley Vale NSW 2261 Australia			
DIST	—	I	NEW RELEASE	15-05-2013	RN	AT	MATERIAL DESC ALUMINIUM ALLOY	MATERIAL NO -	MATL SPEC/STD/DRG NO -	PROCESS SPEC HEAT TREAT/PLATING NO -	SIZE A3	PROJECTION 3RD ANGLE	SCALE NTS	DRAWING NO FAD1855-1935-8-C	SHEET 1	OF 1	REV 1
POS	REV	REVISION RECORD		DATE	DWN	APVD											