




CATALOGUE NUMBER: FSLD0900-5 SUITS CONDUCTOR

DEADEND

| STRANDING | COND. TYPE | DIAMETER | FITTING LAY |
|-----------|------------|----------|-------------|
| 6/1/3.00 | ACSR | 9.00 | RIGHT HAND |
| 4/3/3.00 | ACSR | 9.00 | RIGHT HAND |
| 7/3.00 | AAC/AAAC | 9.00 | RIGHT HAND |

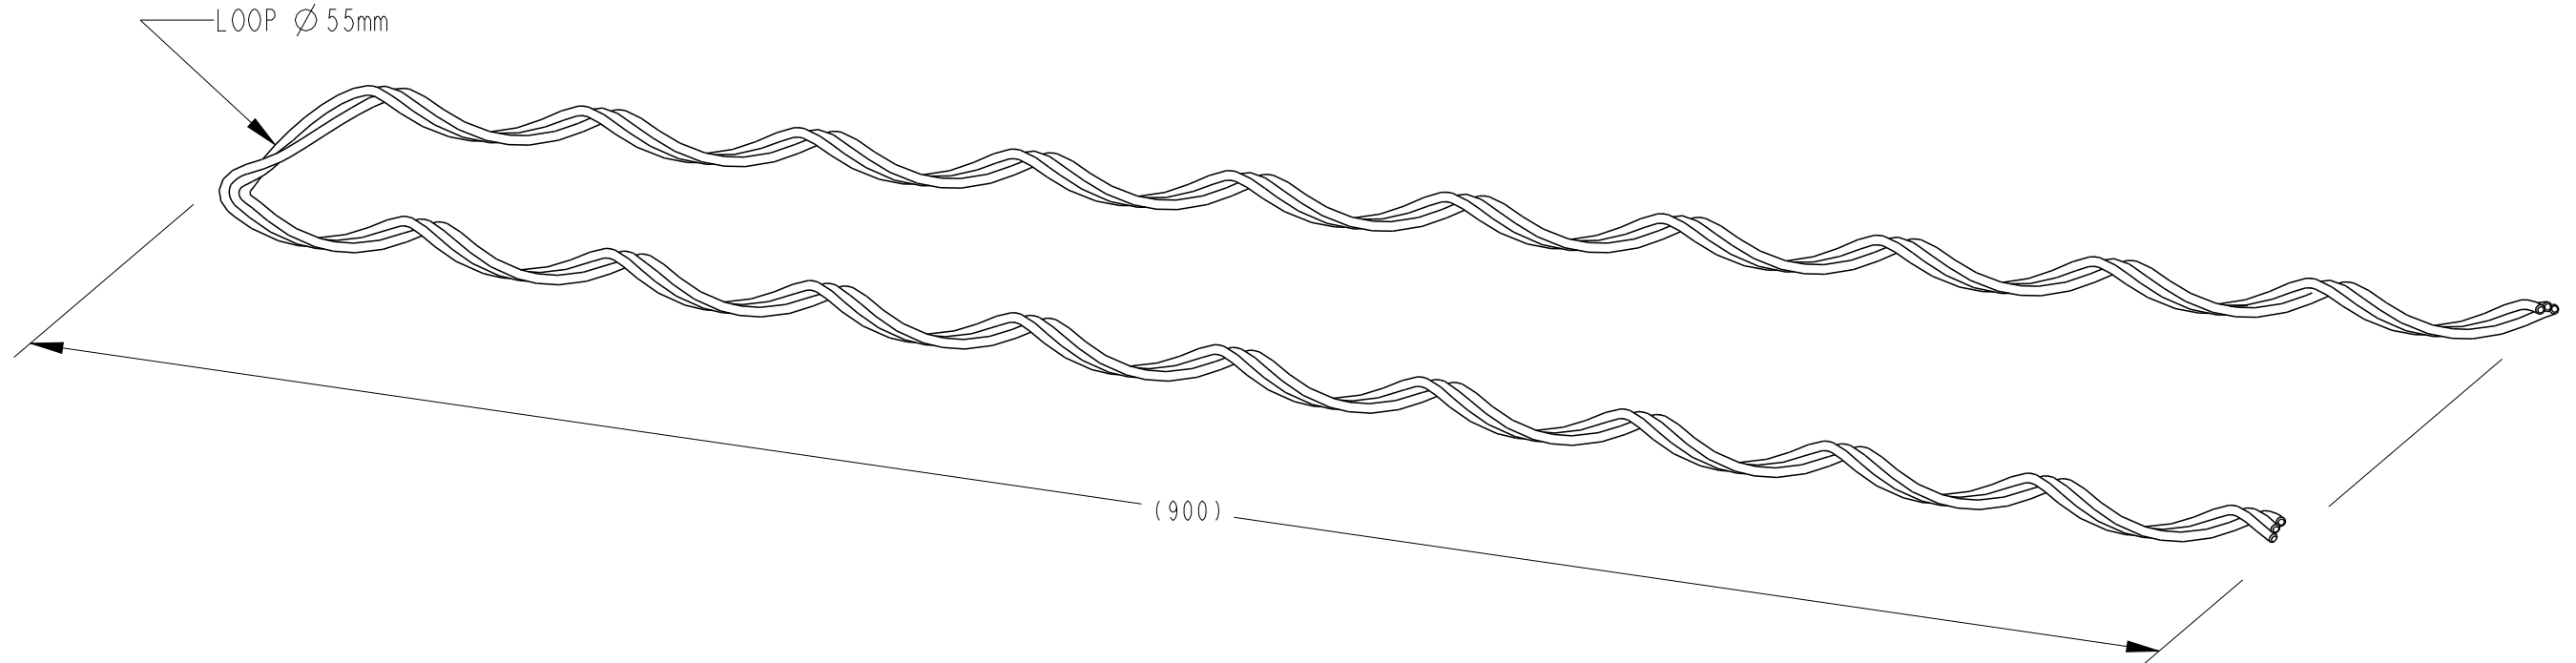

BOX LABEL

P/N: FSLD0900-5
 ID:
 DESCRIPTION:
FULL-TENSION AL-CLAD STEEL DEADEND
 6/1/3.00 ACSR
 4/3/3.00 ACSR
 7/3.00 AAC/AAAC
 RANGE: 9.00
 COLOUR-CODE: RED
 QTY: 25 WEIGHT: BATCH:

TECHNICAL SPECIFICATIONS:

CATALOGUE NUMBER: FSLD0900-5
 DESCRIPTION: FULL-TENSION SPECIFIC APPLICATION
 AL-CLAD STEEL DEADEND
 MATERIAL: ALUMINIUM CLAD STEEL WIRE
 NUMBER OF RODS: 3
 ROD DIAMETER: 3.25mm
 OVERAL LENGTH: 900mm
 END FINISH: CHAMFERED
 FITTING LAY DIRECTION: RIGHT HAND
 COLOUR CODED: RED

PRODUCT LABEL

FSLD0900-5
 6/1/3.00 ACSR
 4/3/3.00 ACSR
 7/3.00 AAC/AAAC

WEIGHT: 0.34kg
 BATCH NO:
 MONTH/YEAR:

| | | | | | | | | | | |
|------|-----|---|--|------------|-----|------|---|--|---|---|
| LOC | | | | | | | IMPLIED NOTES BURRS AND SHARP EDGES REMOVED SCREW THREADS ARE TO AS 1275 DO NOT WORK TO DIMS MARKED REF SURFACE FINISH 6.3 U.N.O. DIMS ARE IN mm. DO NOT SCALE | IMPLIED TOLERANCES HOLE DIA AND LOCATIONS: ±0.5mm. DIMENSIONS UP TO 30mm: ±1.5mm. DIMENSIONS OVER 30mm: ±5% UP TO A MAX OF: ±5mm. ANGULAR DIMENSIONS: ±5° | TCPN - PART Alias UTX/DUL FSLD0900-5 Cat No FSLD0900-5 | TITLE FULL-TENSION SPECIFIC AL-CLAD STEEL DEADEND (FSLD) FITTING COND. RANGE: Ø 9.00 6/1/3.00 & 4/3/3.00 ACSR 7/3.00 AAC/AAAC |
| DIST | D4 | I | THIRD CONDUCTOR STRANDING IN TABLE 7/3.00 AAC/AAAC WAS 7/4.75 AAC/AAAC. (7/4.75 WAS INCORRECT) | 13-08-2013 | AG | AT | | | | DRAWN: RN CHECKED: MN DATE: 17-05-2013 APPROVED: AT TE Connectivity 2/3 Corella Close Berkeley Vale NSW 2261 Australia |
| POS | REV | | REVISION RECORD | DATE | DWN | APVD | MATERIAL NO | MATL SPEC/STD/DRG NO | PROCESS SPEC HEAT TREAT/PLATING NO | SIZE: A3 PROJECTION: 3RD ANGLE SCALE: NTS DRAWING NO: FSLD0900-5-C SHEET OF: 1 1 REV: 1 |

D
C
B
A