




CATALOGUE NUMBER: NAA1325-1400
SUITS CONDUCTOR

ARMOUR RODS

STRANDING	COND. TYPE	DIAMETER	FITTING LAY
7/4.50	AAC/AAAC	13.50	RIGHT HAND
7/0.173	AAC/AAAC	13.25	RIGHT HAND

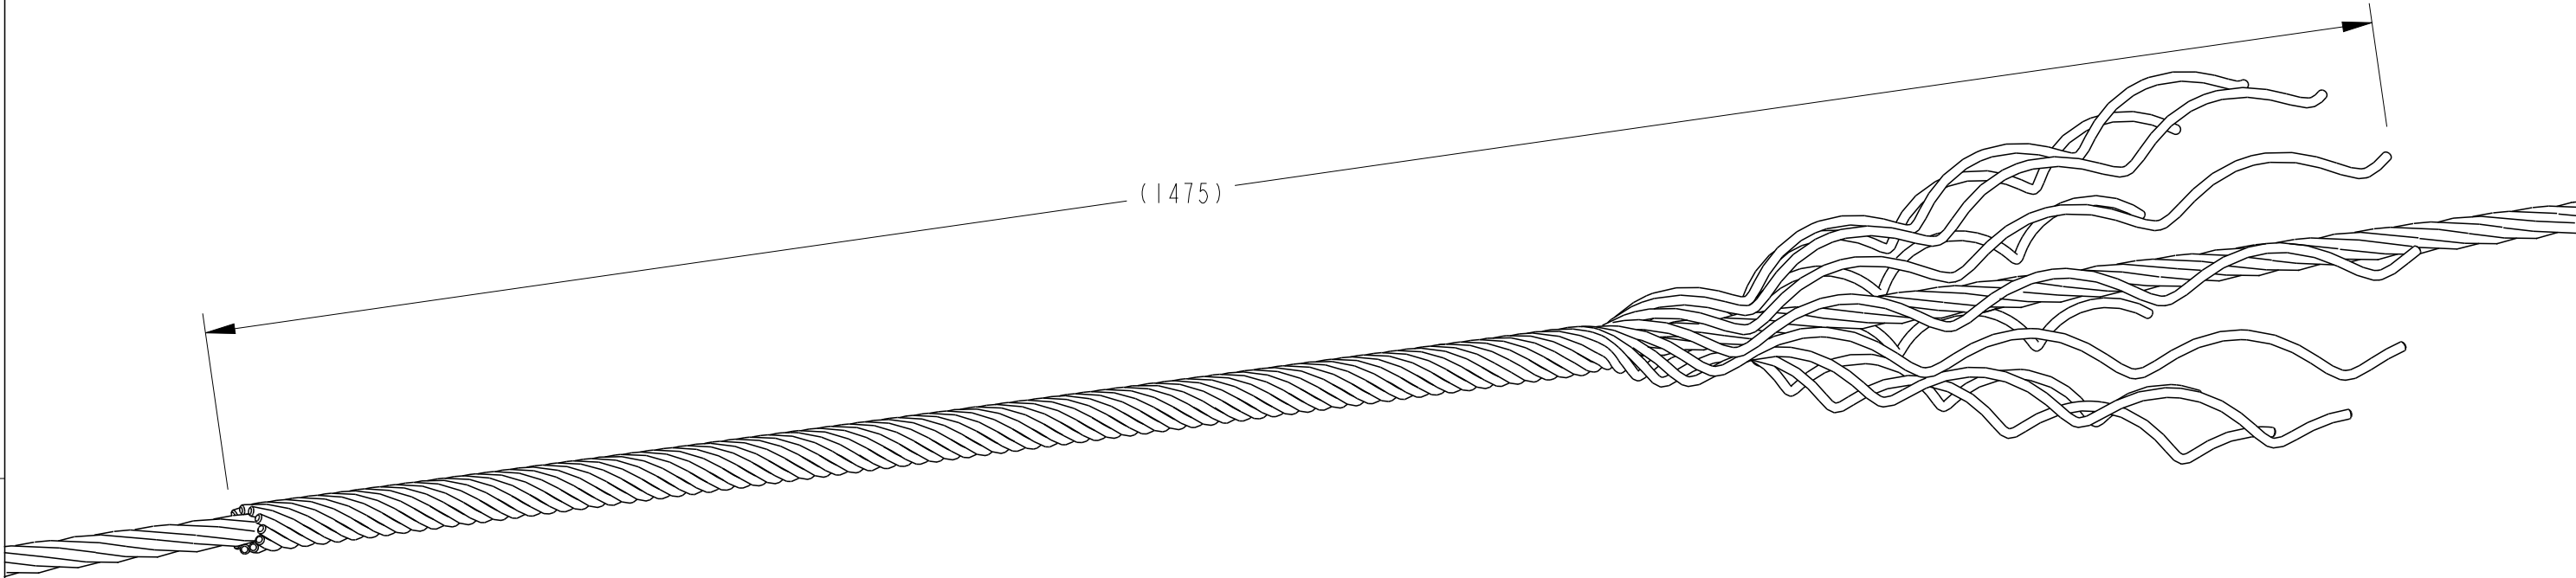

TECHNICAL SPECIFICATIONS;

CATALOGUE NUMBER: NAA1325-1400
DESCRIPTION: NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING
MATERIAL: ALUMINIUM ALLOY
NUMBER OF RODS: 11
ROD DIAMETER: 4.47mm
OVERAL LENGTH: 1475mm
END FINISH: BALLENDDED
FITTING LAY DIRECTION: RIGHT HAND
COLOUR CODED: GREEN
RODS ARE LABELED, BUNDLED IN A SET AND TAPED AT BOTH ENDS.

BOX LABEL




P/N: NAA1325-1400
ID:
DESCRIPTION:
NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING
7/4.50 AAC/AAAC
7/0.173 AAC/AAAC
RANGE: 13.25 - 14.00
COLOUR-CODE: GREEN
QTY: 20 WEIGHT: BATCH:

PRODUCT LABEL



NAA1325-1400
7/4.50 AAC/AAAC
7/0.173 AAC/AAAC

WEIGHT: 0.74kg
BATCH NO:
MONTH/YEAR:

							IMPLIED NOTES BURRS AND SHARP EDGES REMOVED SCREW THREADS ARE TO AS 1275 DO NOT WORK TO DIMS MARKED REF SURFACE FINISH 6.3 U.N.O. DIMS ARE IN mm. DO NOT SCALE		IMPLIED TOLERANCES HOLE DIA AND LOCATIONS.±0.5mm. DIMENSIONS UP TO 30mm...±1.5mm. DIMENSIONS OVER 30mm...±5% UP TO A MAX OF.....±5mm. ANGULAR DIMENSIONS.....±5°.		TCPN - PART Alias UTX/DUL NAA1325-1400 Cat No NAA1325-1400		TITLE NON-TENSION ALUMINIUM ARMOUR RODS (NAA) FITTING COND.RANGE: Ø13.25-Ø14.00 7/4.50 AAC/AAAC 7/0.173 AAC/AAAC						
LOC													DRAWN RN		DATE 30-04-2013		 TE Connectivity 2/3 Corella Close Berkeley Vale NSW 2261 Australia		
DIST	—	I	NEW RELEASE		30-04-2013	RN	AT	MATERIAL DESC ALUMINIUM ALLOY					CHECKED MN		APPROVED AT				
	POS	REV	REVISION RECORD		DATE	DWN	APVD	MATERIAL NO -	MATL SPEC/STD/DRG NO -	PROCESS SPEC HEAT TREAT/PLATING NO		SIZE A3	PROJECTION 3RD ANGLE	SCALE NTS	DRAWING NO NAA1325-1400-C		SHEET 1	OF 1	REV 1