

REV. 1  
DCO 102413


COIL: @ 25°C	7600 OHMS ±10%
RESISTANCE	
NOMINAL VOLTAGE	115.0 VAC (60-400 HZ)
MUST OPERATE	72.0 VAC (60-400 HZ)
MUST RELEASE	10.0 VAC MIN. (60-400 HZ)

ENVIRONMENT:

VIBRATION	10	CPS TO	2000	CPS @	20	g's
SHOCK	100	g's	6	MS. DURATION		
TEMPERATURE	-65	°C TO	+125	°C		

NOTES: OPERATE TIME 15 MS MAX.  
RELEASE TIME 20 MS MAX.  
CONTACT BOUNCE 5 MS MAX.

CUSTOMER DATA SHEET

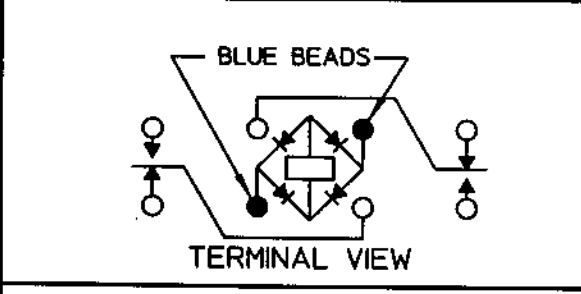

CONTACT RATING:	3 AMPS 115 VAC.
	60 HZ RESISTIVE 50,000 OPERATIONS
	5 AMP 115 VAC 400 HZ RESISTIVE
	50,000 OPERATIONS

DR. B.D. 11/18/99 | CK. TLG 7-31-00

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. C.I.I. STD.  
CUST. NO. REV.

07 RELAY

B07B042AS1