

REVISIONS			
LTR	DESCRIPTION	DATE	APPROVED
A	REVISED PER E.C.N. T-5959	86-1-13	I.M.
B	REVISED REDRAWN PER E.C.N. T-10097	88-5-17	345

NOTES:

1. PART DESCRIPTION: BRAID TERMINATOR ASSEMBLY


A. MATERIAL:

1. INSULATION SLEEVE: HEAT SHRINKABLE POLYVINYLIDENE FLUORIDE.
2. SOLDER RING: COMPOSITION Sn63, PER QQ-S-571.
3. TERMINATOR SHELL: BRASS ALLOY, PER QQ-B-626C.
4. INSERT: IMMERSION RESISTANT THERMOPLASTIC.

B. FINISH:



1. TERMINATOR SHELL: SOLDER - PLATED PER MIL-P-81728A OVER NICKEL PER QQ-N-290.

 MARKING: "0056", YELLOW INK, RANDOM ORIENTATION.

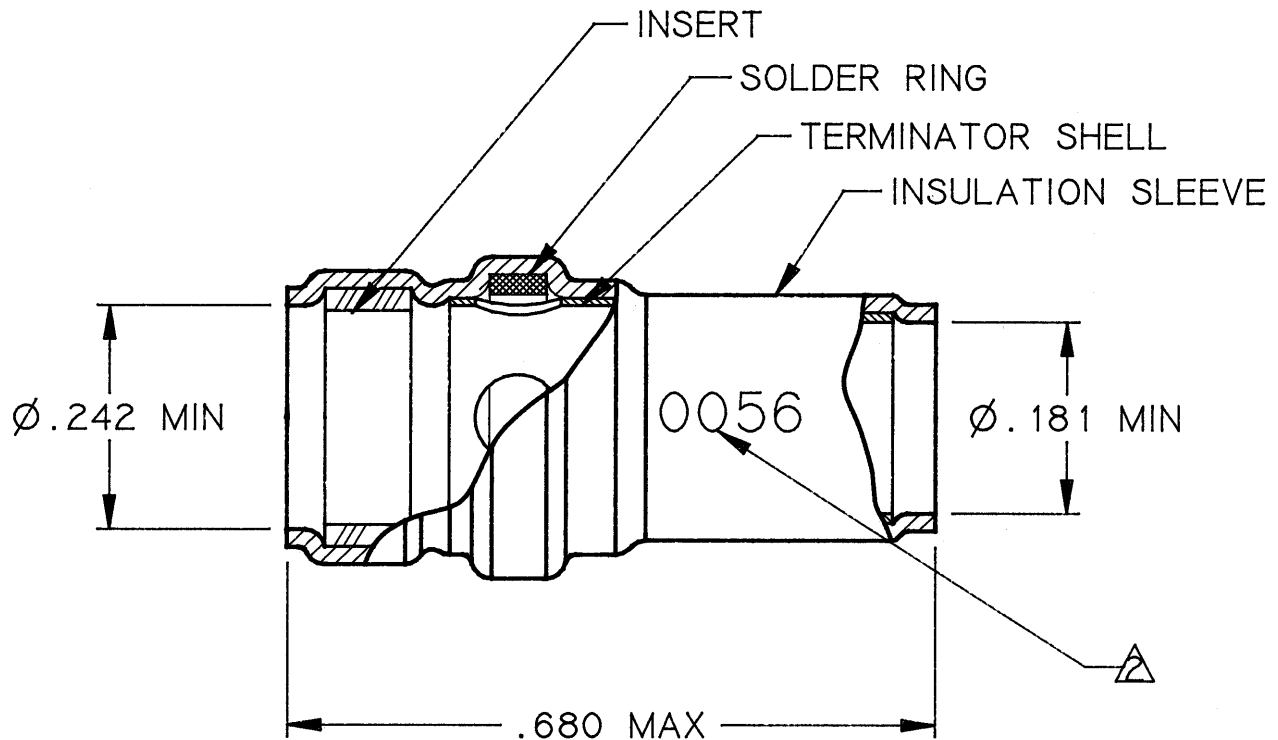

SPECIFICATION CONTROL DRAWING  Raychem Corporation 1988

If this document is printed it becomes uncontrolled.
Check with the web for latest revision.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. METRIC DIMENSIONS ARE IN BRACKETS. DECIMALS .XXX ± N/A [mm] .XX ± N/A [mm] ANGLES .X ± N/A WEIGHT lbs [g]	DRAWN RDL 88-5-13		RAYCHEM CORPORATION 300 CONSTITUTION DRIVE MENLO PARK, CALIFORNIA 94025		
	CHECKED			TITLE BRAID TERMINATOR ASSEMBLY WITH SEAL	
	APPROVED		345 88-5-17		
	APPROVED				
CAD NAME RDL E: \SCD\196305S		SIZE A	CODE IDENT. NO. 06090	DWG. NO. D-600-0056	REV B
THIRD ANGLE PROJECTION 		DO NOT SCALE THIS DRAWING		SHEET 1 OF 1	

