

RAYCHEM CABLE CLAMPS DUAL

KEY FEATURES

- Range accepts cable diameters from 26-38mm, 38-50mm, 50-60mm, 60-70mm & 70-80mm
- Single level or stackable configurations
- Captive elastomeric inserts for increased cable protection and containment
- Smooth aesthetics which improve overall strength while in operation
- 33% glass fibre reinforced polyamide resin, UV stabilised, self-extinguishing, impact resistant material

Raychem cable clamps have been designed such that the bottom half of the cable clamp can be mounted in position before positioning the cables. The cables can then be aligned and located in the bottom half of the clamp prior to tightening. Other clamps require the cables to be positioned at the same time as the clamp itself, which is difficult to achieve, especially in vertical applications.

Elastomeric inserts are provided with all clamps. This ensures excellent mechanical performance, in particular under fault conditions. It also maximises cable contact, even on “non-round” cables, as is the case on many 3 core cable designs which tend to be more “tri-round”.

Raychem cable clamps are optimised for harsh environments with stainless steel hardware and self-extinguishing, UV stabilised materials.

Customers can count on consistent, high quality products, driven by TE's proven innovation and backed by our extraordinary customer support.



RAYCHEM DUAL CABLE CLAMPS



Raychem Dual Cable Clamps are available as single clamps, and as a double stacked configuration. Furthermore, TE Connectivity's in-house design team is on hand to produce tailor made schematics and specify technical details for custom cable clamp layouts that suit your specific needs. Please contact your local TE Connectivity Representative for more details.


DUAL CLAMPS WITH HARDWARE ORDERING INFORMATION

TE Part Number	Min Cable Ø mm (in)	Max Cable Ø mm (in)	Width A mm (in)	Depth B mm (in)	Bolt Hole Ctrs C mm (in)	Installed Height H - Max mm (in)	Bolt Ø	Type
CCD26-38-SN-M12	26 (1.02)	38 (1.5)	135 (5.31)	60 (2.36)	100 (3.94)	110 (4.33)	M12	Strut Nut
CCD38-50-SN-M12	38 (1.5)	50 (1.97)	170 (6.69)	60 (2.36)	138 (5.43)	115 (4.53)	M12	Strut Nut
CCD50-60-SN-M12	50 (1.97)	60 (2.36)	200 (7.87)	60 (2.36)	160 (6.3)	120 (4.72)	M12	Strut Nut
CCD60-70-SN-M12	60 (2.36)	70 (2.76)	240 (9.45)	70 (2.76)	200 (7.87)	140 (5.51)	M12	Strut Nut
CCD70-80-SN-M12	70 (2.76)	80 (3.15)	240 (9.45)	70 (2.76)	200 (7.87)	140 (5.51)	M12	Strut Nut

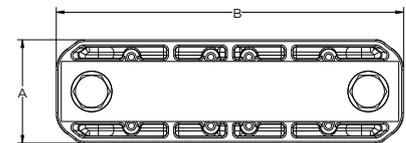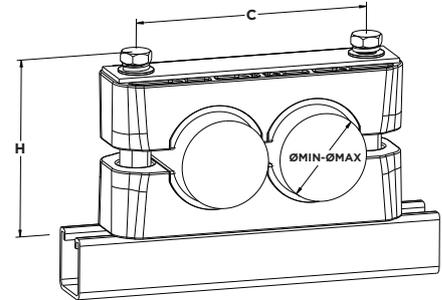

DOUBLE DUAL CLAMPS WITH HARDWARE ORDERING INFORMATION

TE Part Number	Min Cable Ø mm (in)	Max Cable Ø mm (in)	Width A mm (in)	Depth B mm (in)	Bolt Hole Ctrs C mm (in)	Installed Height H - Max mm (in)	Bolt Ø	Type
CCD26-38-SN-M12-DOUB	26 (1.02)	38 (1.5)	135 (5.31)	60 (2.36)	100 (3.94)	220 (8.66)	M12	Strut Nut
CCD38-50-SN-M12-DOUB	38 (1.5)	50 (1.97)	170 (6.69)	60 (2.36)	138 (5.43)	230 (9.06)	M12	Strut Nut
CCD50-60-SN-M12-DOUB	50 (1.97)	60 (2.36)	200 (7.87)	60 (2.36)	160 (6.3)	240 (9.45)	M12	Strut Nut
CCD60-70-SN-M12-DOUB	60 (2.36)	70 (2.76)	240 (9.45)	70 (2.76)	200 (7.87)	280 (11.02)	M12	Strut Nut
CCD70-80-SN-M12-DOUB	70 (2.76)	80 (3.15)	240 (9.45)	70 (2.76)	200 (7.87)	280 (11.02)	M12	Strut Nut

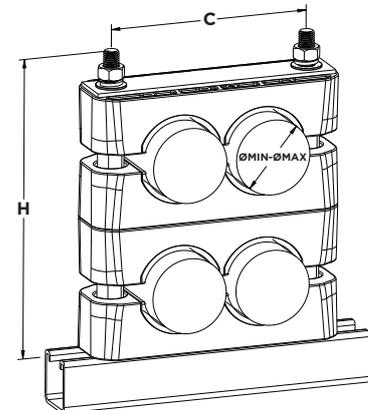

STRUT NUT VERSION

Used where access to the end of the mounting rail is not possible

te.com/energy

©2016 TE Connectivity Ltd. family of companies. All Rights Reserved. EPP-2211-DDS04-6/16-EN-CCD-Raychem (Cable Clamps Dual (CCD))

TE Connectivity and TE Connectivity (logo) are trademarks. Other logos, product and/or company names might be trademarks of their respective owners. While TE has made every reasonable effort to ensure the accuracy of the information in this brochure, TE does not guarantee that it is error-free, nor does TE make any other representation, warranty or guarantee that the information is accurate, correct, reliable or current. TE reserves the right to make any adjustments to the information contained herein at any time without notice. TE expressly disclaims all implied warranties regarding the information contained herein, including, but not limited to, any implied warranties of merchantability or fitness for a particular purpose. The dimensions in this catalog are for reference purposes only and are subject to change without notice. Specifications are subject to change without notice. Consult TE for the latest dimensions and design specifications.

FOR MORE INFORMATION: TE Customer Support Centers

NSW/QLD/NT/ACT:	+61 (2) 9554 2695
VIC/TAS/SA:	+61 (3) 9271 5243
WA:	+61 (8) 9358 7806
New Zealand:	+64 (9) 634 4580
Email:	marketingANZ@te.com