


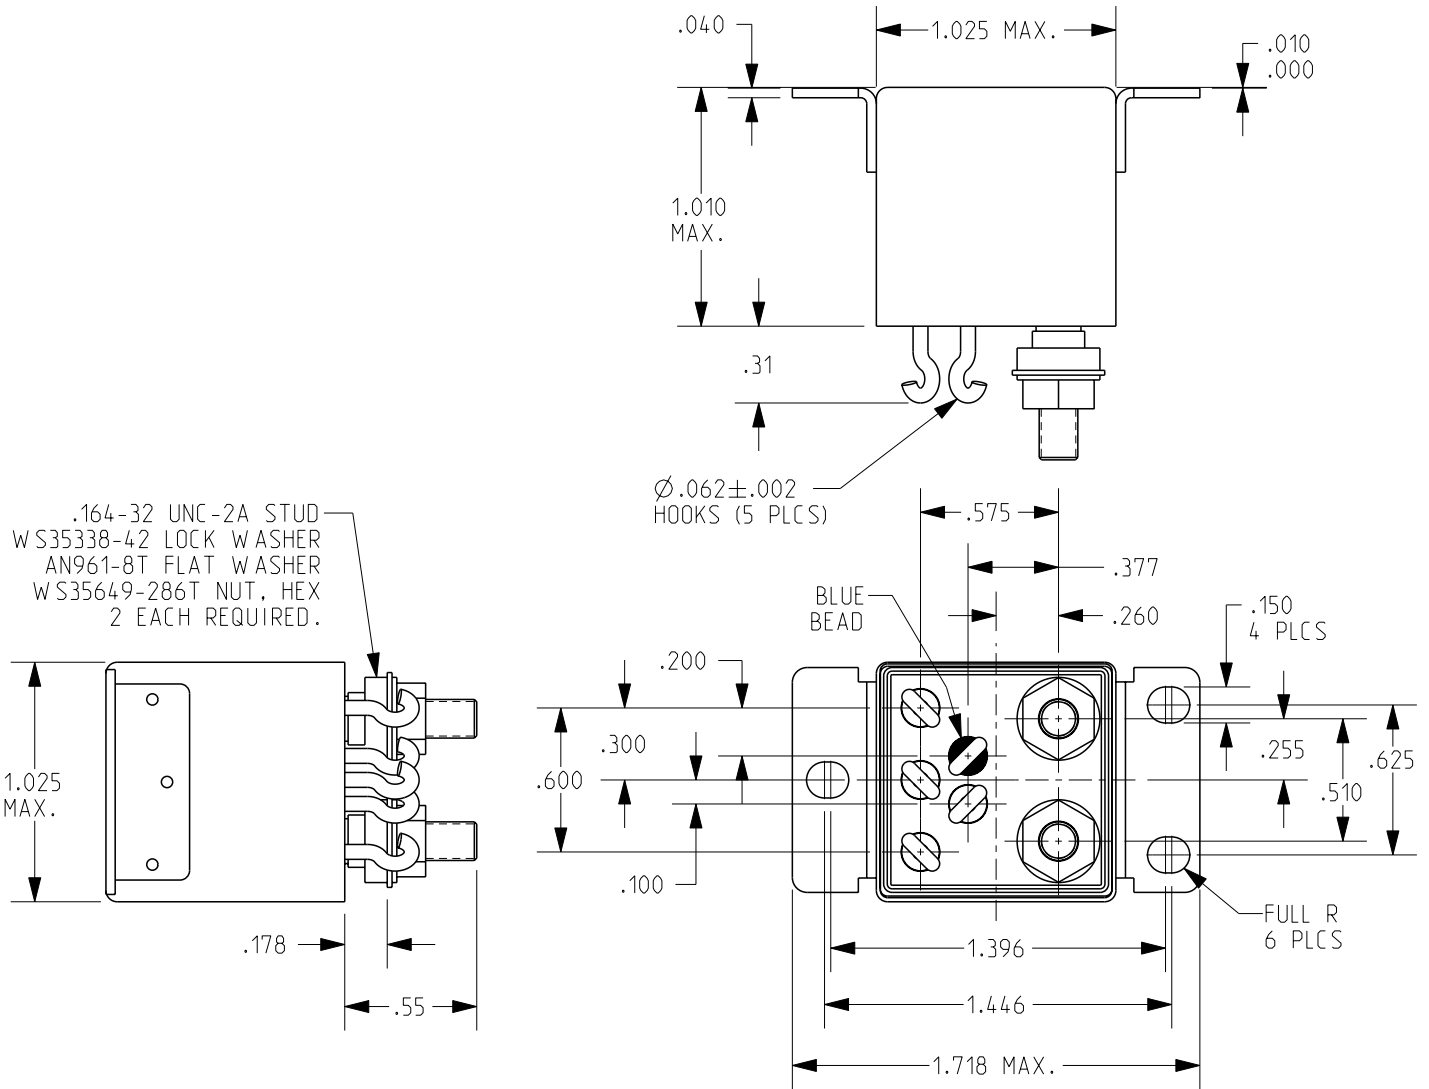

REV. A

DCO 301662

TOLERANCES  $\pm .010$ " - UNLESS  
OTHERWISE SPECIFIED

COIL: @ 25°C

RESISTANCE 290 OHMS  $\pm 10\%$

NOMINAL VOLTAGE 28.0 VDC

MUST OPERATE 13.5 VDC MAX.

MUST RELEASE 5.5 VDC MAX. 2.3 VDC MIN.

ENVIRONMENT:

VIBRATION 75 Hz TO 3000 Hz @ 20 g's

SHOCK 50 g's 11 MS. DURATION

TEMPERATURE -70 °C TO +125 °C


NOTES: OPERATE AND RELEASE 15 ms MAX. AT 25°C

CONTACT BOUNCE 1 ms MAX. AUX BOUNCE 5ms MAX

DIELECTRIC 1250 VRMS MAX./60 Hz (1000 VRMS/60 Hz COIL TO CASE)

COIL TRANSIENT SUPPRESSION 42 VDC MAX.

## CUSTOMER DATA SHEET

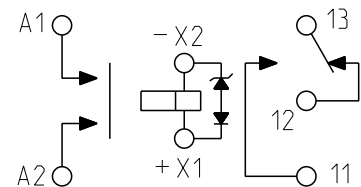

TERMINAL VIEW

CONTACT RATING:

50 AMPS 28 VDC.

AUX 2 AMP 28VDC.

RESISTIVE 50,000 OPERATIONS EACH

DR. R.F. 10/21/2014

CK. J.M.B. 10/21/2014



TE Connectivity

CUST. CII CATALOG

CUST. NO. REV.

TE NUMBER

9-1617800-5

FCAC-150-CU4