


REV. B  
DCO 301558

COIL: @ 25°C	
RESISTANCE	290 OHMS ±10%
NOMINAL VOLTAGE	28.0 VDC
MUST OPERATE	13.5 VDC MAX.
MUST RELEASE	5.5 VDC MAX. 2.3 VDC MIN.

ENVIRONMENT:	
VIBRATION	75 Hz TO 3000 Hz @ 20 g's
SHOCK	50 g's 11 MS. DURATION
TEMPERATURE	-70 °C TO +125 °C

NOTES:	
OPERATE AND RELEASE 15 ms MAX. AT 25°C	
CONTACT BOUNCE 1 ms MAX. AUX BOUNCE 5ms MAX	
DIELECTRIC 1250 VRMS MAX./60 Hz (1000 VRMS/60 Hz COIL TO CASE)	
COIL TRANSIENT SUPPRESSION 42 VDC MAX.	

CUSTOMER DATA SHEET

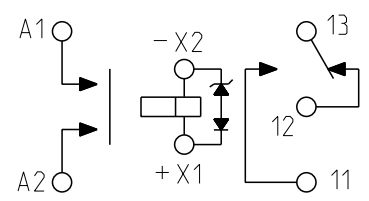

TERMINAL VIEW

CONTACT RATING:	
	50 AMPS 28 VDC.
	AUX 2 AMP 28VDC.
	RESISTIVE 50,000 OPERATIONS EACH

DR. R.F. 01/03/2013 | CK. JMB 01/03/2013



CUST. CII CATALOG	
CUST. NO. REV.	

TE NUMBER	7-1617805-2
-----------	-------------

FCAC-150-CX4