


REV. 1  
DCO 17535

COIL: @ 25°C	
RESISTANCE	3500 OHMS ±10%
NOMINAL VOLTAGE	48 VDC
MUST OPERATE	25.5 VDC
MUST RELEASE	2.5 VDC MIN.

ENVIRONMENT:	
VIBRATION	10 Hz TO 2000 Hz @ 20 g's
SHOCK	100 g's 6±1 MS. DURATION
TEMPERATURE	-65 °C TO +125 °C
NOTES:	OPERATE & RELEASE 4 MS MAX. CONTACT BOUNCE 2.0 MS MAX

CUSTOMER DATA SHEET

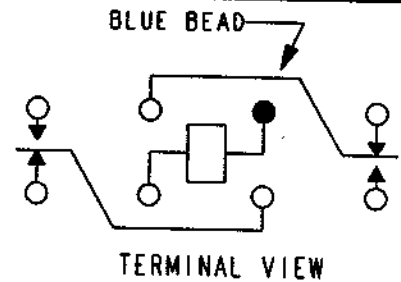

CONTACT RATING:	2A 28 VDC
	RESISTIVE, 100,000 OPERATIONS

DR. B.D. 7/6/99 CK. *[Signature]*



CUST. C.I.I. STD.  
CUST. NO. REV.

"HFW" RELAY

HFW1102E00