

CUSTOMER DATA SHEET

COIL: @ +25° C


RESISTANCE  $700 \Omega \pm 10\%$

NOMINAL VOLTAGE 26.5 VDC

MUST OPERATE 13.5 VDC

MUST RELEASE 1.5 VDC

TOLERANCE UNLESS OTHERWISE SPECIFIED  
 DECIMALS  $\pm .005$  FRACTIONAL  $\pm 1/64$

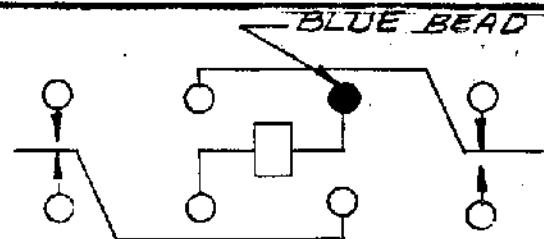

CONTACT RATING: LOW LEVEL TO  
 2 AMP @ 28 VDC RESISTIVE  
 100,000 OPERATIONS

ENVIRONMENT:

VIBRATION 10 CPS TO 2000 CPS AT 30 g's

SHOCK 100 g's  $6 \pm 1$  MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES:

DR. 2-2-84

CK. OSW



Communications  
 Instruments, Inc.

CUST. QPL  
 CUST. NO. M39016/6-207L

TYPE HFW RELAY

HFW 1131 K05