







REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	18DEC2014	HMR	CW
	B	ECR-15-015267	19OCT2015	DW	CW
	B1	ECR-19-012251	05SEP2019	WQR	CW

- NOTES:
- TECHNICAL CHARACTERISTICS:
INSULATION MATERIAL: PC
RATED VOLTAGE: 400V
RATED CURRENT: 16A
INSULATION RESISTANCE: $\geq 400M\Omega$
RATED IMPULSE VOLTAGE: 6KV
POLLUTION DEGREE: 3
FLAMMABILITY: UL94V-0
MATING CYCLES: 500 CYCLES
WIRE RANGE: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
CONTACT TYPE: CRIMP CONTACT
 - CONTACTS NEED TO BE ORDERED SEPARATELY.
(ORDER No. REFER TO DRAWING:T20300X10XX000)

- 注释:
- 技术参数:
绝缘材料: PC
额定电压: 400V
额定电流: 16A
绝缘电阻: $\geq 400M\Omega$
脉冲电压: 6KV
污染等级: 3
阻燃等级: UL94V-0
插拔次数: 500次
接线范围: $0.14mm^2 \sim 4mm^2$ (AWG26-AWG12)
接线类型: 冷压接
 - 端子需要单独订购.
(订货号参考图面: T20300X10XX000)

T2059202101-000	HEEE-020-M	HEEE-020 MALE INSERT,NO LOGO HEEE-020公插,无LOGO
PART NUMBER 料号	PART DESCRIPTION 描述	

18DEC2014 AVENDRA H M		 TE Connectivity				
18DEC2014 S WANG						
18DEC2014 IANG						
SPEC		NAME HEEE-020 MALE INSERT,NO LOGO				
- 137068						
ION SPEC						
- 137068						
-		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
A3		00779	C-T2059202101000		-	
er Drawing				SCALE 1:1	SHEET 1 OF 1	REV B1

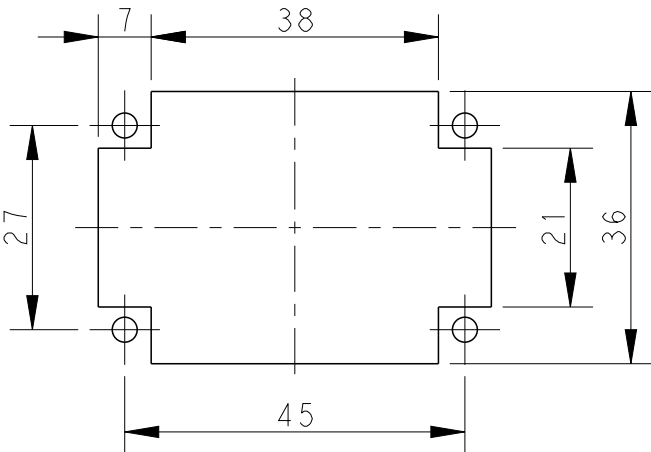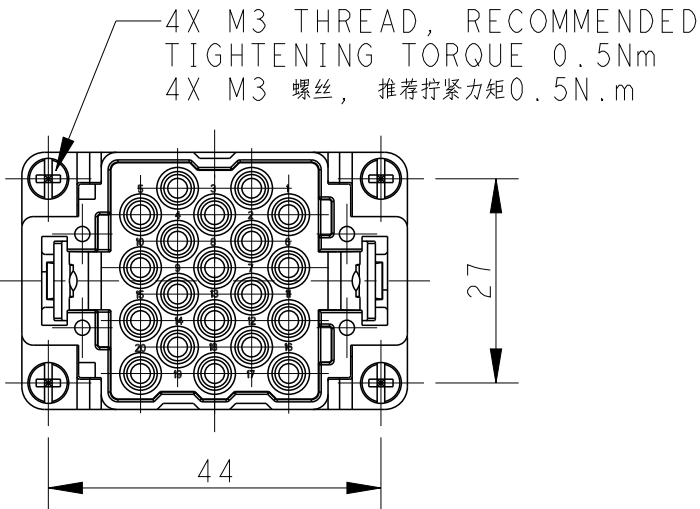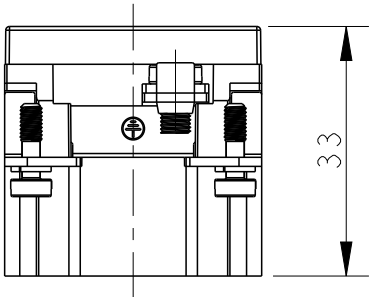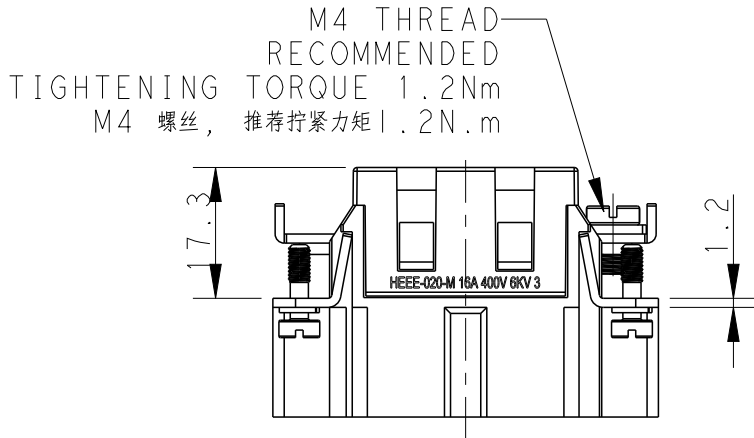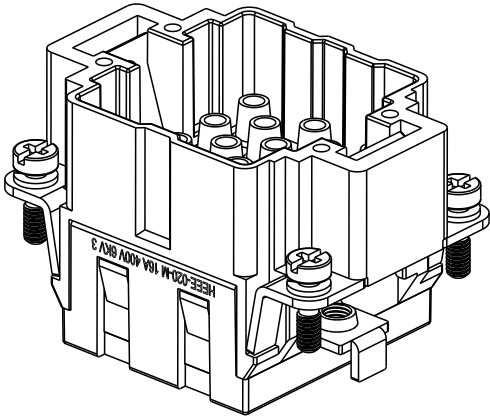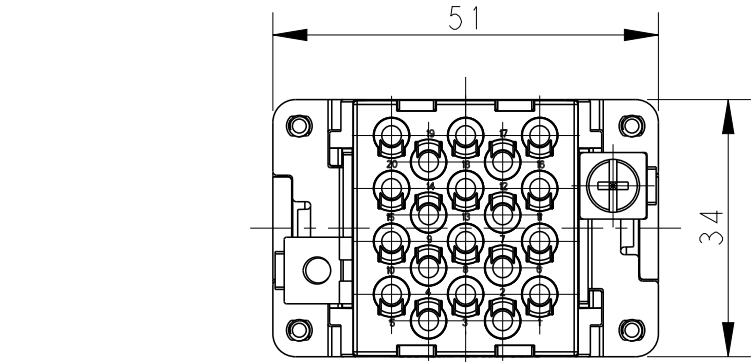

PANEL CUT FOR INSERTS FOR USE
WITHOUT HOODS/ HOUSINGS
不使用防护外壳时芯件的安装开孔图

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ±-
	1 PLC ±-
	2 PLC ±-
	3 PLC ±-
	4 PLC ±-
MATERIAL -	FINISH -