

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION



20

© COPYRIGHT 20 BY -

ALL RIGHTS RESERVED.

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	INITIAL RELEASE	16APR2015	DL	CW
	B	ECR-21-111798	06OCT2021	WQR	CW
	B1	ECR-22-127614	27JAN2022	WQR	CW

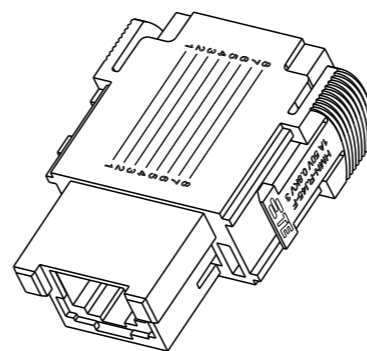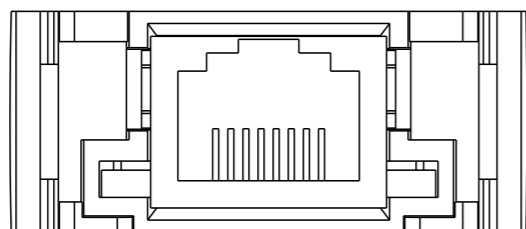






SCALE 1:1

NOTES:

- TECHNICAL CHARACTERISTICS:  
 INSULATION MATERIAL: PC  
 RATED VOLTAGE: 50V  
 RATED CURRENT: 1A  
 INSULATION RESISTANCE:  $\geq 400M\Omega$   
 RATED IMPULSE VOLTAGE: 0.8KV  
 POLLUTION DEGREE: 3  
 FLAMMABILITY: UL94V-0  
 MATING CYCLES: 750  
 OPERATION TEMPERATURE:  $-40^{\circ}C \sim +70^{\circ}C$

注释:

- 技术参数:  
 绝缘材料: PC  
 额定电压: 50V  
 额定电流: 1A  
 绝缘电阻:  $\geq 400M\Omega$   
 脉冲电压: 0.8KV  
 污染等级: 3  
 阻燃等级: UL94V-0  
 插拔次数: 750  
 工作温度:  $-40^{\circ}C \sim +70^{\circ}C$

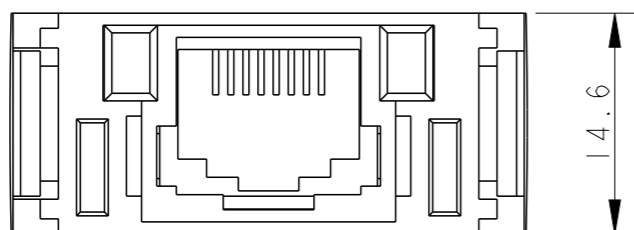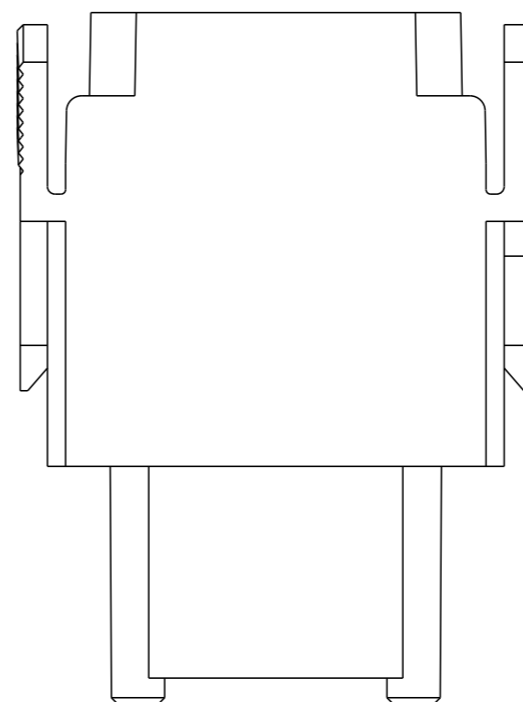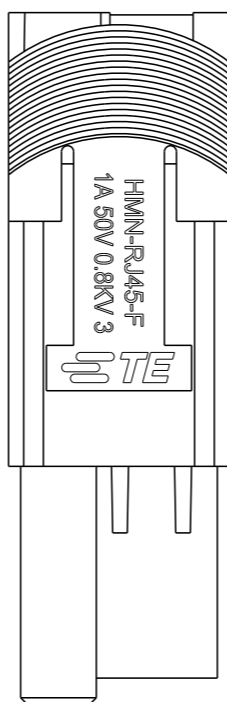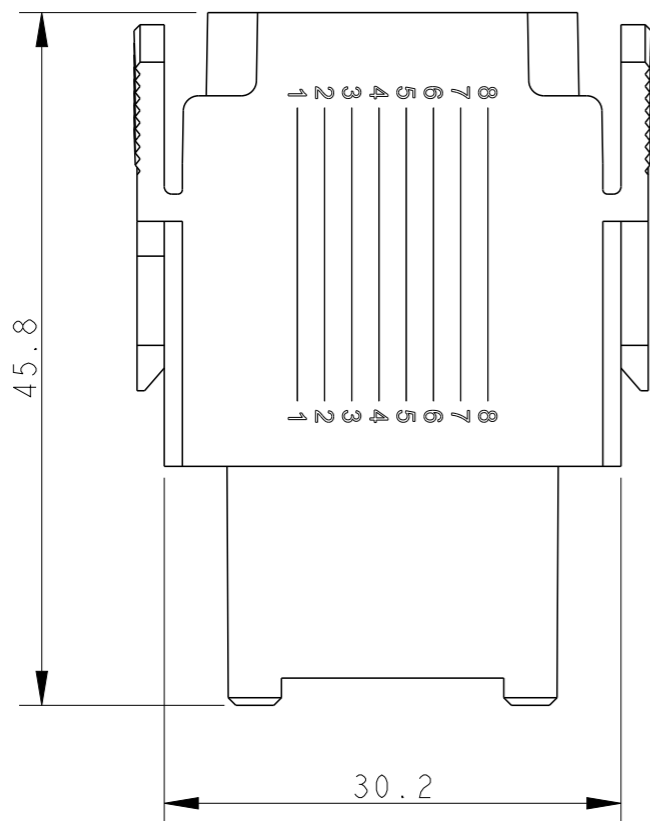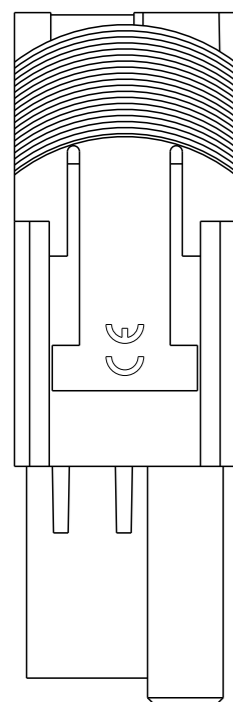

14.6

HMN-RJ45-F	T2113000201-000
DESCRIPTION	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	DAVID LI	16APR2015		TE Connectivity											
DIMENSIONS: mm		CHK	CHRIS WANG	16APR2015													
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	XU XIANG	16APR2015													
<table border="0"> <tr><td>0 PLC</td><td>±-</td></tr> <tr><td>1 PLC</td><td>±-</td></tr> <tr><td>2 PLC</td><td>±-</td></tr> <tr><td>3 PLC</td><td>±-</td></tr> <tr><td>4 PLC</td><td>±-</td></tr> <tr><td>ANGLES</td><td>±-</td></tr> </table>		0 PLC	±-	1 PLC			±-	2 PLC	±-	3 PLC	±-	4 PLC	±-	ANGLES	±-	PRODUCT SPEC	108-137065
0 PLC	±-																
1 PLC	±-																
2 PLC	±-																
3 PLC	±-																
4 PLC	±-																
ANGLES	±-																
MATERIAL		APPLICATION SPEC	114-137065	SIZE	A3	CAGE CODE	-	DRAWING NO	©-T2113000201000	RESTRICTED TO							
FINISH		WEIGHT	-	CUSTOMER DRAWING			SCALE	2:1	SHEET	1 OF 1	REV	B1					