


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	NC	NEW RELEASE PER E.O. P17926	17OCT2002	DM	RDR
	A	REVISED PER E.O. P19654	10OCT2007	JA	RDR
	B	REVISED PER PCN E-18-012207	31JUL2018	JA	DM
	B1	REVISED PER PCN E-19-018080	19NOV2019	MK	DM



OPTIONAL TRACEABILITY ID
 IN THIS AREA LOCATED ON
 DIAMETER

INSPECTION HOLE

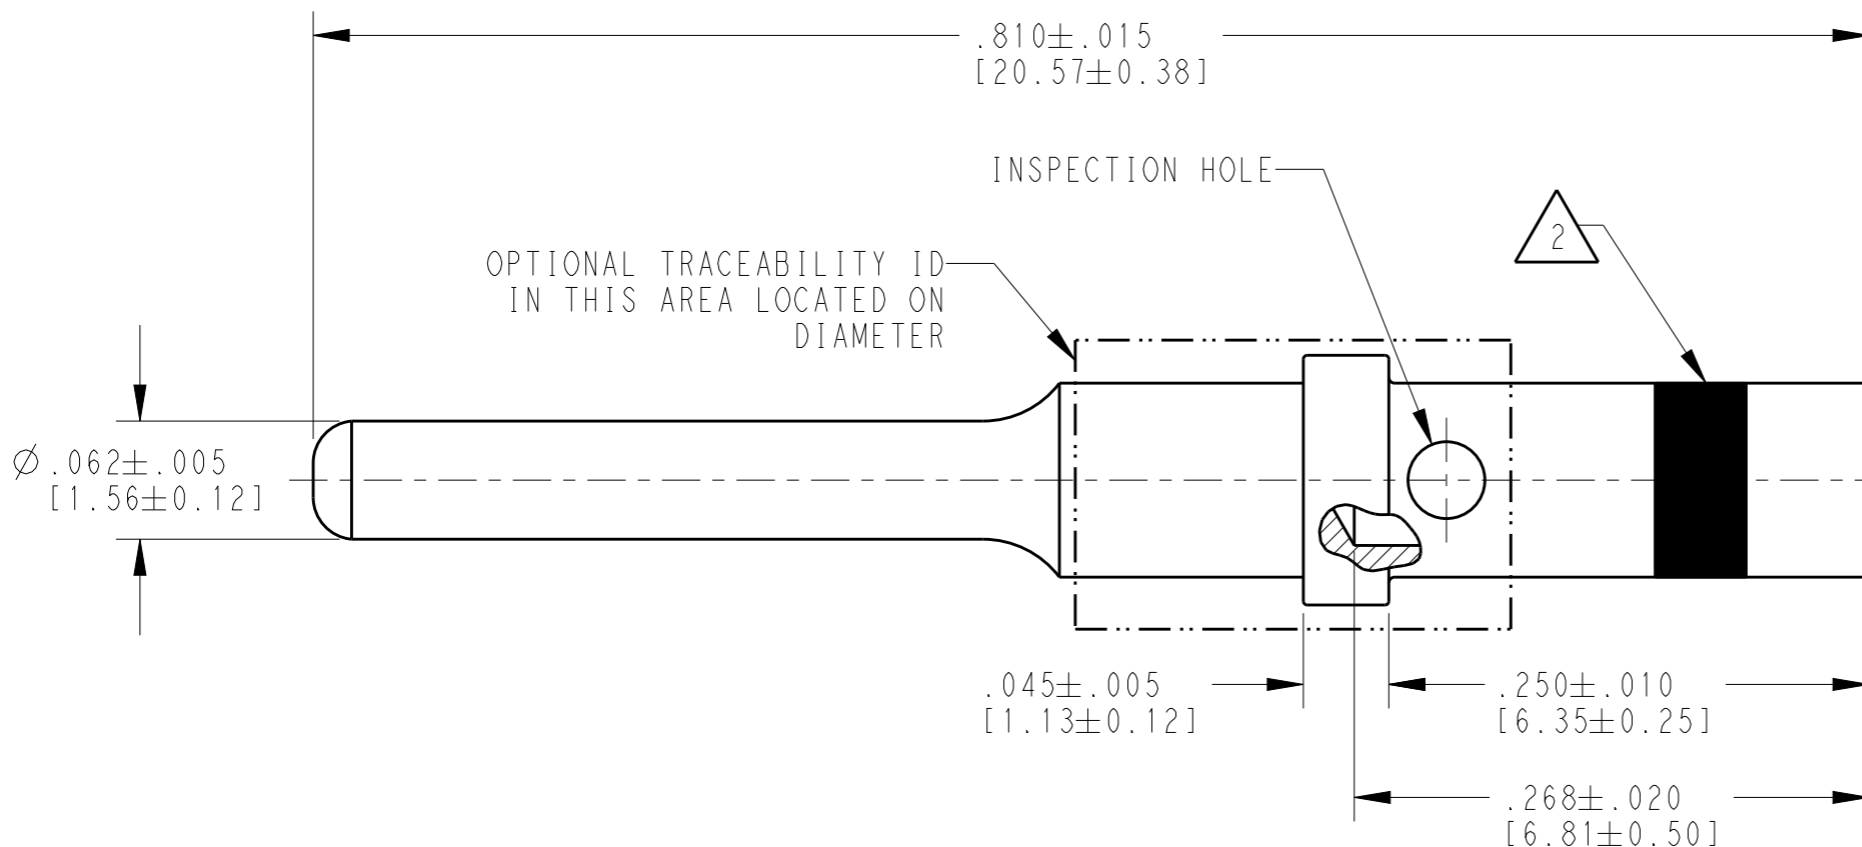

$\varnothing .130 \pm .005$
 [3.30 ± 0.12]

$\varnothing .101 \pm .005$
 [2.57 ± 0.12]

$\varnothing .068 \pm .005$
 [1.73 ± 0.12]

$.045 \pm .005$
 [1.13 ± 0.12]

$.250 \pm .010$
 [6.35 ± 0.25]

$.268 \pm .020$
 [6.81 ± 0.50]

TE INTERNAL PN	DEUTSCH PN	PLATING
0460-002-1631	0460-002-1631	GOLD

- (B1) 3. SEE APPLICATION SPECIFICATION 114-151004 FOR CRIMP TOOLS AND WIRE RANGE
- 2 PIN CONTACT IS IDENTIFIED WITH SINGLE BLUE STRIPE.
1. THIS PIN CONTACT USED ON HIGH DURABILITY APPLICATIONS.

NOTES: UNLESS OTHERWISE SPECIFIED

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN D. MEYER 11OCT2002		
DIMENSIONS: INCHES [mm]		CHK R. MESSENGER 09OCT2007		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD R. REED 10OCT2007	NAME CONTACT, PIN SIZE 16	
0 PLC ±		PRODUCT SPEC 108-151004	SIZE A3	
1 PLC ±		APPLICATION SPEC 114-151004	CAGE CODE 4AFU8	DRAWING NO 0460-002-16XX
2 PLC ±		WEIGHT 0.58g	RESTRICTED TO -	
3 PLC ±		CUSTOMER DRAWING	SCALE 10:1	SHEET 1 OF 1
4 PLC ±			REV B1	
ANGLES ±				
FINISH				