
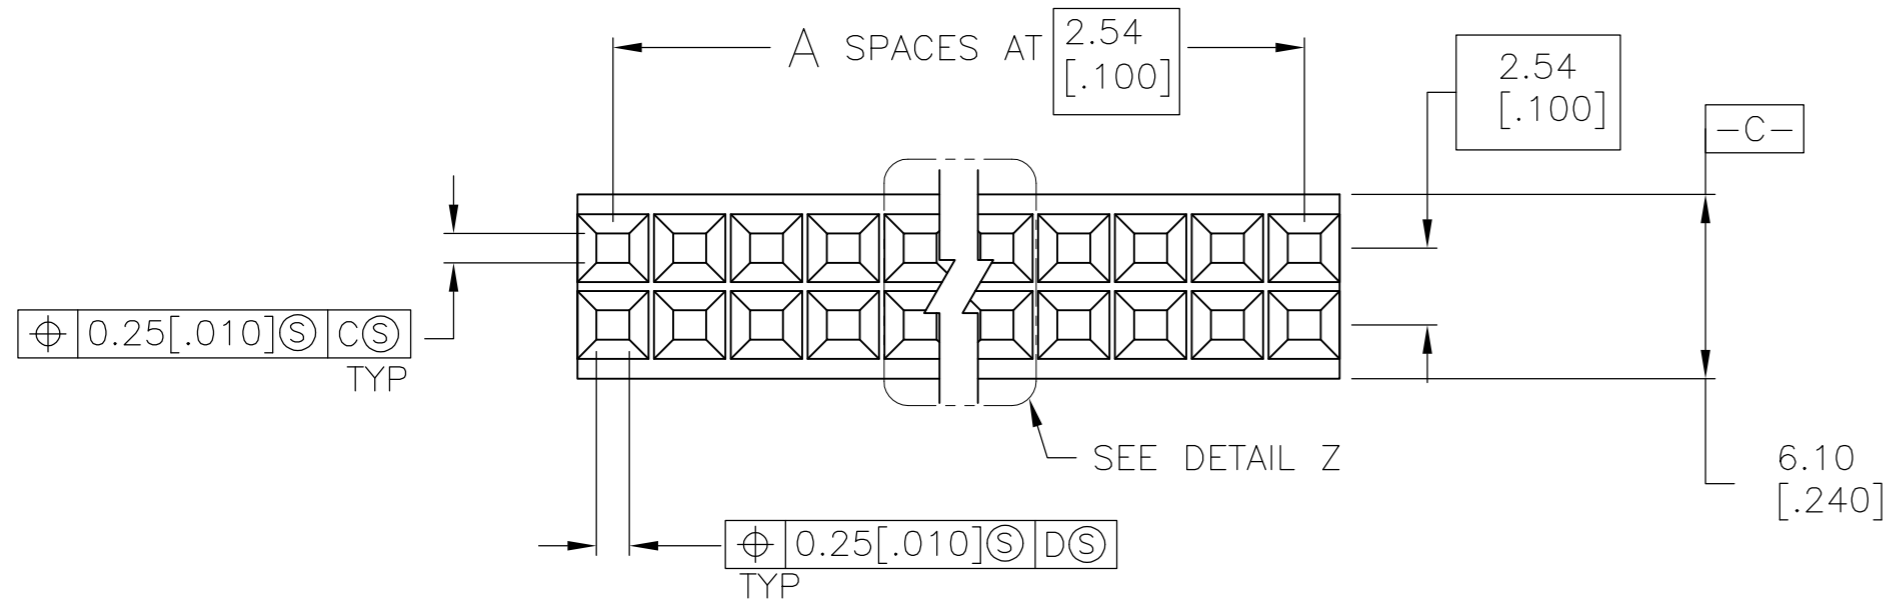



THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
AD	28				
N		REVISED PER ECO-15-008006	17NOV2015	NK	MM

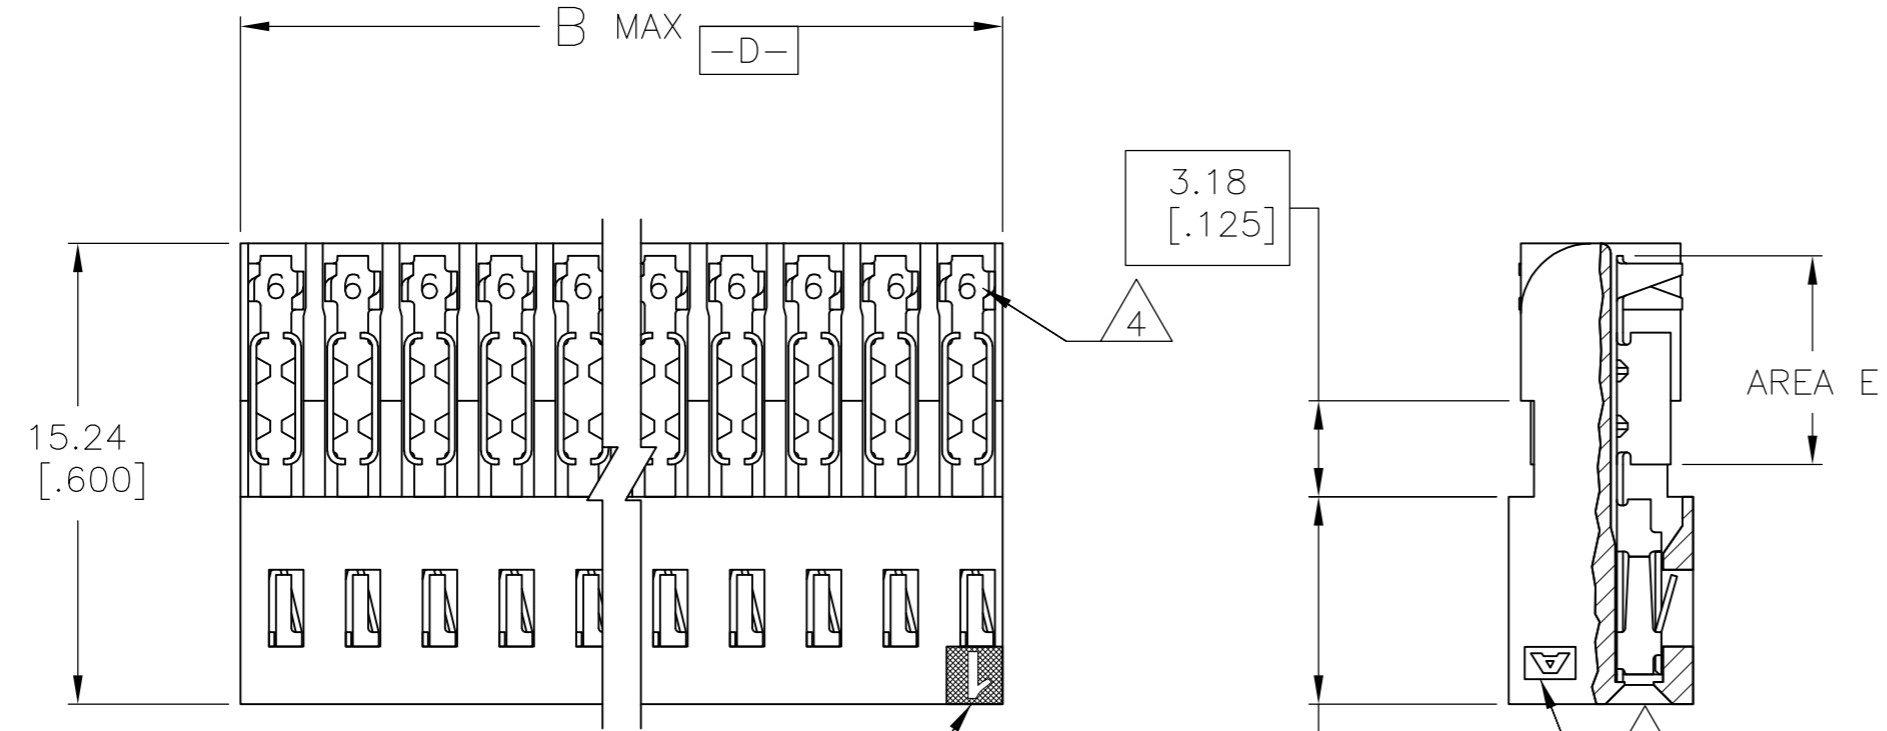

6	7				
6	7	25.40 [1.000]	9	20	5-102695-8
6	7	22.86 [.900]	8	18	5-102695-7
6	7	20.32 [.800]	7	16	5-102695-6
6	7	17.78 [.700]	6	14	5-102695-5
6	7	15.24 [.600]	5	12	5-102695-4
6	7	12.70 [.500]	4	10	5-102695-3
6	7	10.16 [.400]	3	8	5-102695-2
6	7	7.62 [.300]	2	6	5-102695-1
9	2	OBSOLETE	9	20	102695-8
9	2	OBSOLETE	8	18	102695-7
9	2	OBSOLETE	7	16	102695-6
9	2	OBSOLETE	6	14	102695-5
9	2	OBSOLETE	5	12	102695-4
10	2	SUPERCEDED	4	10	102695-3
9	2	OBSOLETE	3	8	102695-2
2		7.62 [.300]	2	6	102695-1
B	A		NO. OF POSN		PART NO.

- 1 MOLDED CURCUIT #1 IDENTIFIER IN LOCATION SHOWN
- 2 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN-LEAD IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 3 USE WITH 20-22 AWG WIRE SIZE, .050 MAX INSULATION DIA, .015 MAX INSULATION WALLTHICKNESS.
- 4 CONTACT IDENTIFICATION NUMBER "6" LOCATED IN THIS AREA
- 5 AMP TRADEMARK (EITHER SIDE).
- 6 FINISH: 0.00076[.000030] GOLD IN CONTACT AREA, 0.00127[.000050]-0.00254[.000100] TIN IN AREA E, ALL OVER 0.00076[.000030] NICKEL.
- 7 ROHS 2002/95/EC, COMPLIANT.
- 8 HOUSING: FLAME RETARDANT THERMOPLASTIC, COLOR-BLACK CONTACTS: PHOS BRONZE
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- 10 SUPERCEDED BY 5-102395-3

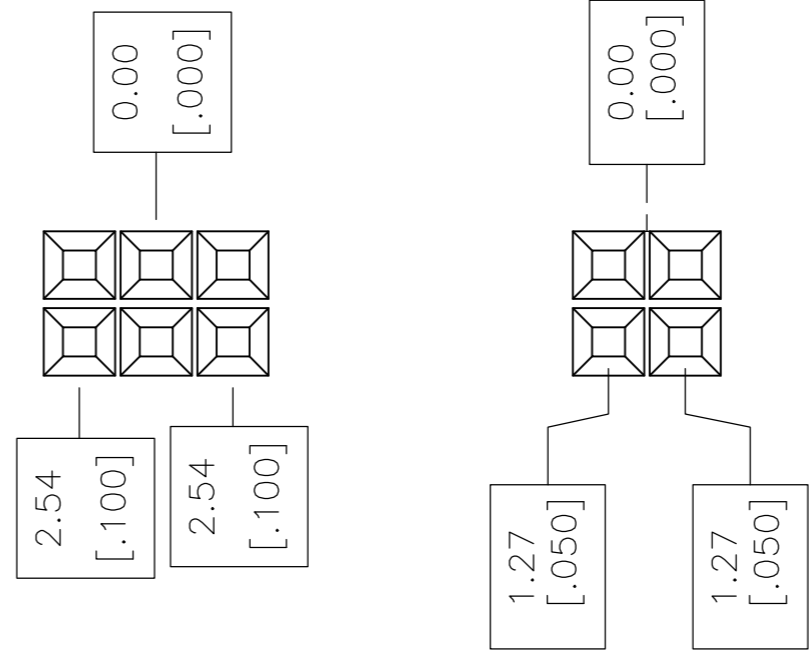

DETAIL Z

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN S. SHUEY 12-17-91		TE Connectivity	
CHK M. RIDER 1-6-92		RCPT ASSY, DBL ROW, .100CL	
APVD M. RIDER 1-6-92		20-22 WIRE, HIGH PRESS, MT	
PRODUCT SPEC		SIZE A2	CAGE CODE 00779
APPLICATION SPEC	WEIGHT -	SCALE 4:1	SHEET 1 of 1
MATERIAL	FINISH SEE TABLE	CUSTOMER DRAWING	REV N