
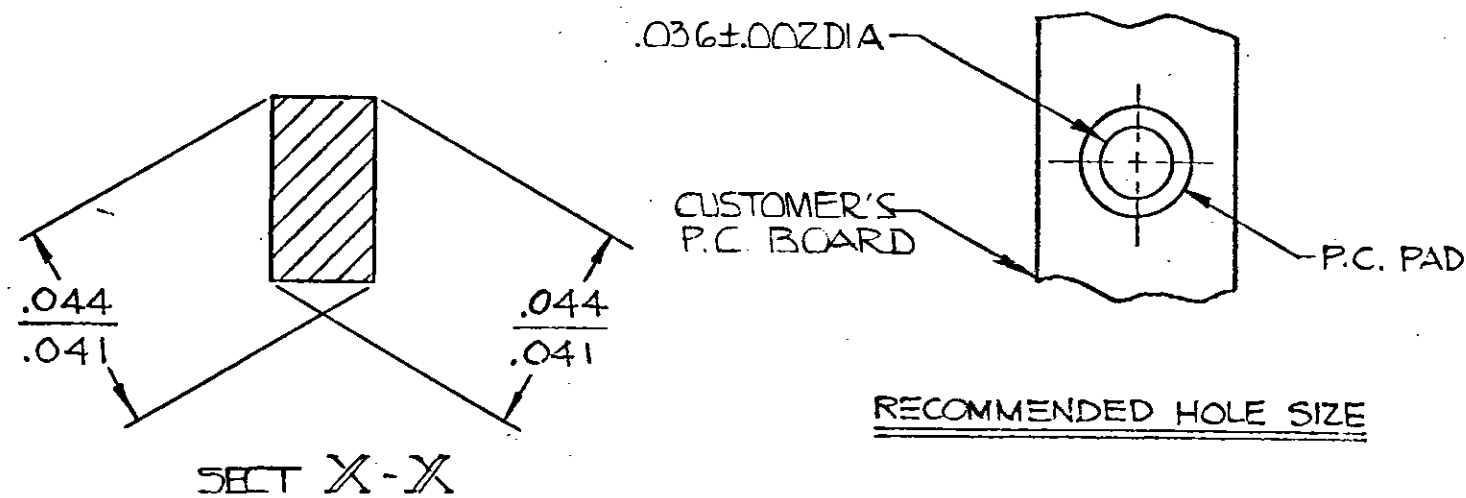
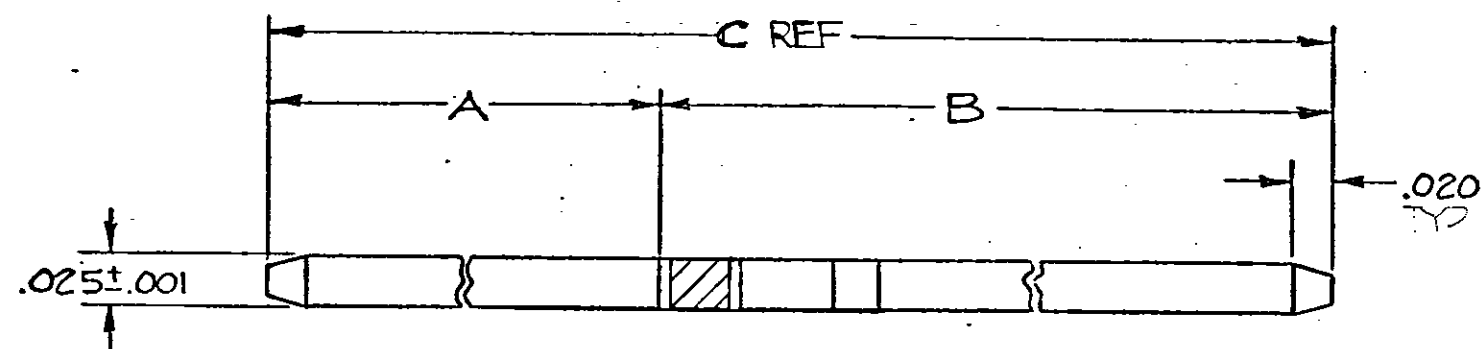


© COPYRIGHT 1981, 83 BY AMP INCORPORATED, HARRISBURG, PA.
ALL INTERNATIONAL RIGHTS RESERVED. AMP INCORPORATED PRODUCTS
COVERED BY U. S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

REVISIONS					
P	F	ZONE	LTR	DESCRIPTION	DATE
			O	RELEASED	
			O	ADDED 3-8, 4-0, 4-1 ECN 4143	12-09-81
			O2	REV ECN 4837	6-29-82
			A	REV ECN 253	6-5-84
			A1	REV ECN 1596	7-1-87
			B	REV ECN AR 2515	7-5-89
			C	REV LOC & DIST AD-4171	11-28-89
			D	REV PER 0010-1406-93	10-22-93
			E	REV PER 0010-0688-94	6-10-94

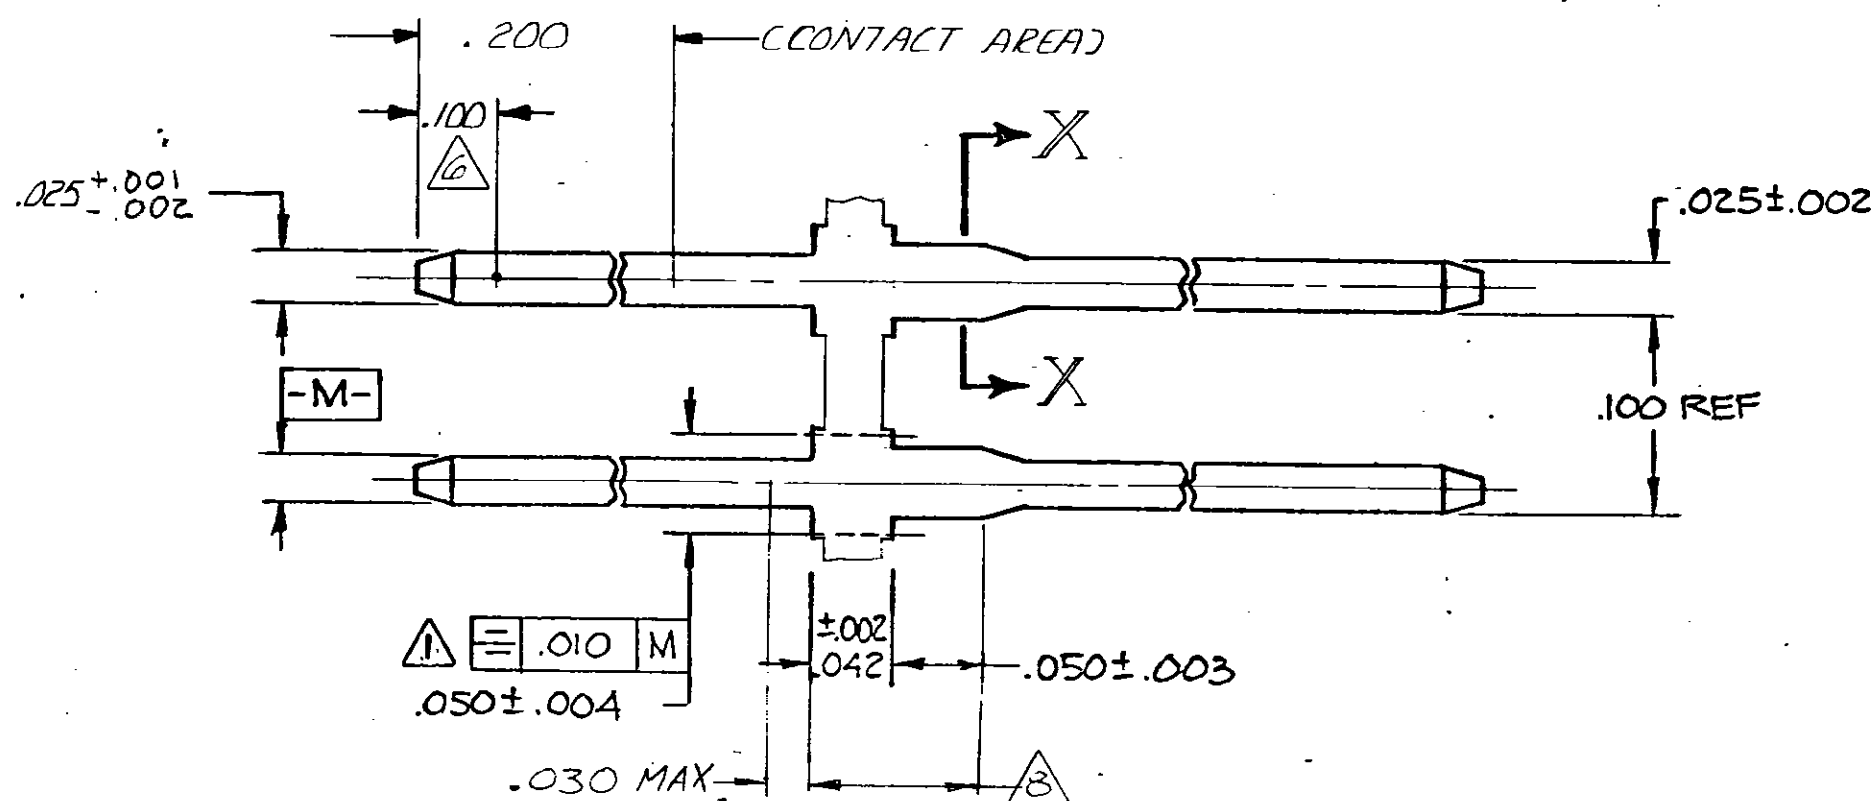

- △ APPLICATOR CUT-OFF DIMENSION.
△ .000100-.000200 BRIGHT TIN-LEAD OVER .000050 NICKEL.
△ .000030 GOLD OVER .000050 NICKEL.
△ .000015 GOLD OVER .000050 NICKEL.
△ .000050 GOLD OVER .000050 NICKEL.
△ POINT OF MEASUREMENT FOR PLATING THICKNESS.
△ .000030 GOLD IN THE CONTACT AREA, .000100-.000200
MATTE TIN-LEAD ON THE SOLDER TAIL, ALL OVER
.000050 NICKEL
△ POST THICKNESS PERMITTED TO BE .0270 MAX
IN THIS AREA AFTER STAMPING

OBSOLETE	△ 7	1.238	.960	.278	4-102830-2
	△ 5	1.238	.960	.278	4-102830-1
	△ 3	1.390	1.160	.230	4- - -0
	△ 3	1.190	.960	.230	3- - -8
	△ 3	1.016	.738	.278	3- - -5
	△ 4	.815	.255	.560	2- - -4
	△ 4	.625	.350	.278	2- - -3
	△ 3	.393	.715		2- - -0
	△ 5	1.478	1.200		2- - -5
	△ 2	1.016	.738		2- - -6
OBSOLETE	△ 2	1.435	1.160		2- - -5
	△ 2	1.238	.960		2- - -4
OBSOLETE	△ 4	1.016	.738		2- - -3
	△ 4	.863	.505		2- - -2
OBSOLETE	△ 4	1.053	.775		2- - -1
	△ 3	1.438	1.160		2- - -0
OBSOLETE	△ 4	1.438	1.160		1- - -9
	△ 3	1.238	.960		1- - -8
OBSOLETE	△ 4	1.238	.960		1- - -7
	△ 4	.925	.650		1- - -6
	△ 4	.728	.450		1- - -5
	△ 4	.878	.550	.278	1-02830-4
FINISH		C	B	A	PART NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ON: DECIMALS ±.005 ANGLES ±.005	CONTRACT NO 10-12-81	AMP INCORPORATED Harrisburg, Pa.
MATERIAL PHOS BRONZE	CHK 10-14-81	NAME POST, .025 SQ, MOD II, UNINSULATED.
FINISH SEE TABLE	APPD 10-14-81	DRAWING NO 102830
	DSGN APPD V	SCALE N.T.S.
	OTHER APPD	SHEET 1 OF 1