

D

C

B





A

D

C

B

A

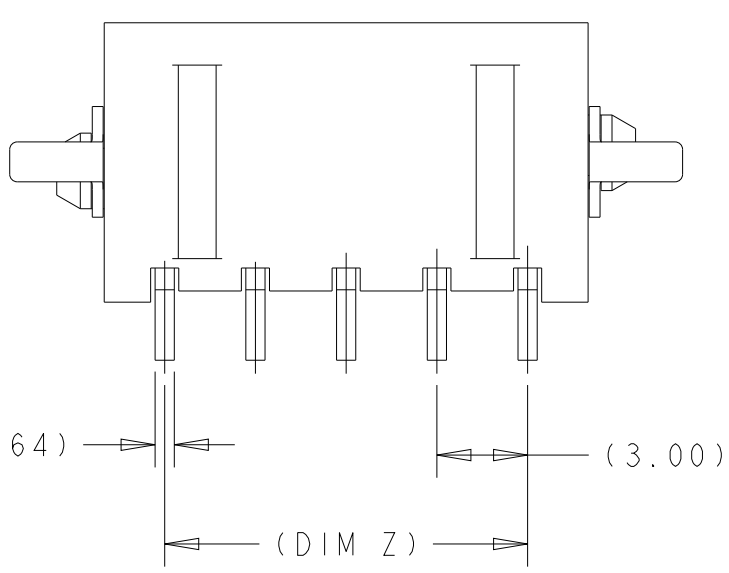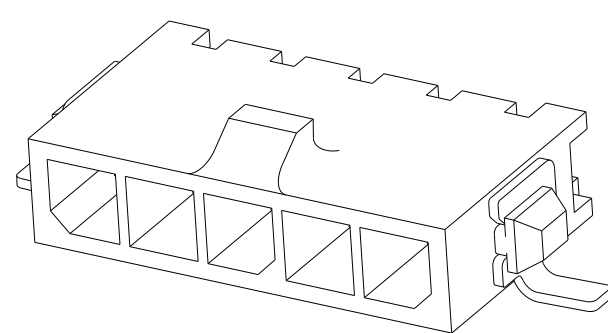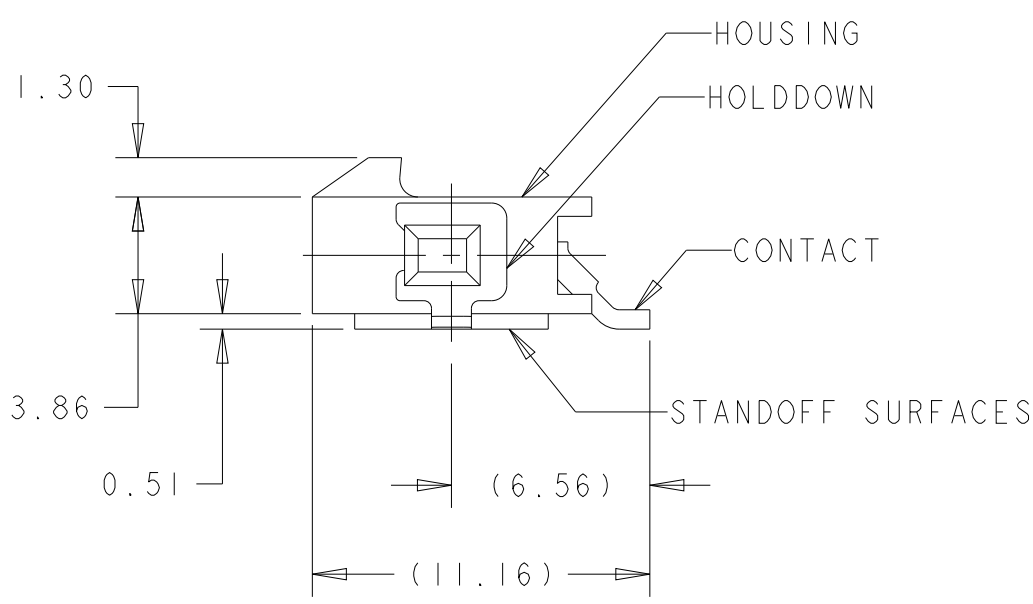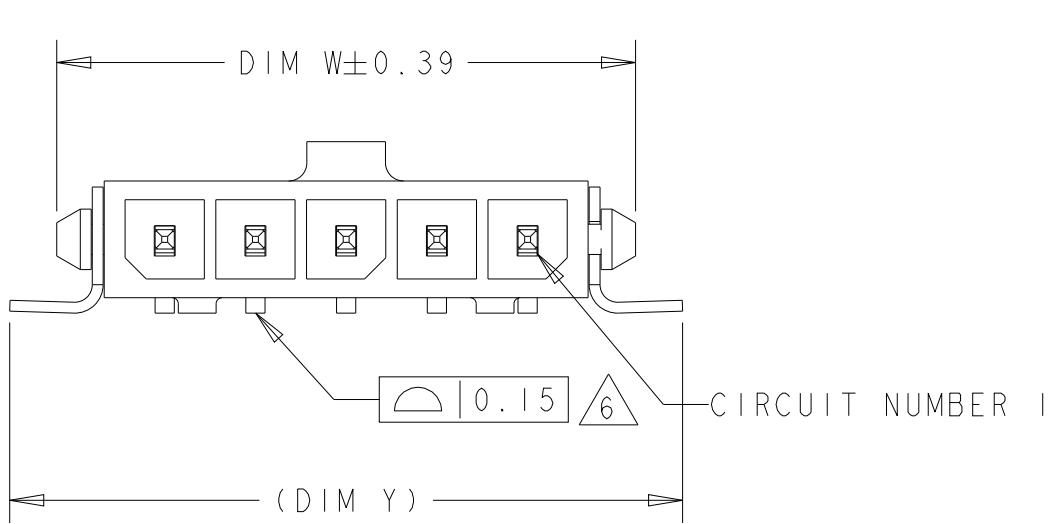

- 1 MATERIAL: HOUSING - UL 94V-0 RATED HIGH TEMP NYLON, COLOR BLACK.
CONTACTS - BRASS
HOLDDOWNS - PHOSPHOR BRONZE.
- 2 RECOMMENDED PC BOARD THICKNESS OF 1.57.
- 3 PLATING: CONTACTS - 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM NICKEL.
HOLDDOWNS - 2.54µm MINIMUM TIN OVER 1.27µm MINIMUM NICKEL.
- 4 COUNTERPART RECOMMENDED IS PN 1445022 OR 2008571 (DASH ACC. TO NUMBER OF POSITION).
- 5 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.
- 6 ALL SOLDER TAILS, STANDOFFS AND BOARDLOCKS.

OBSOLETE	43.25	37.00	33.00	40.27	40.00	12	3-1445057-2
OBSOLETE	40.25	34.00	30.00	37.27	37.00	11	3-1445057-1
	37.25	31.00	27.00	34.27	34.00	10	3-1445057-0
OBSOLETE	34.25	28.00	24.00	31.27	31.00	9	2-1445057-9
	31.25	25.00	21.00	28.27	28.00	8	2-1445057-8
	28.25	22.00	18.00	25.27	25.00	7	2-1445057-7
	25.25	19.00	15.00	22.27	22.00	6	2-1445057-6
	22.25	16.00	12.00	19.27	19.00	5	2-1445057-5
	19.25	13.00	9.00	16.27	16.00	4	2-1445057-4
	16.25	10.00	6.00	13.27	13.00	3	2-1445057-3
	13.25	7.00	3.00	10.27	10.00	2	2-1445057-2
	DIM Y	DIM X	DIM Z	DIM V	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. ROOT 03-OCT-2000	 TE Connectivity						
DIMENSIONS:		CHK K. WHITAKER 13-MAR-2001							
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD K. WHITAKER 13-MAR-2001	NAME RT ANGLE SURFACE MOUNT HEADER ASSY, TIN CONTACTS W/SURF MOUNT HOLDDOWNS, SINGLE ROW, MICRO MATE-N-LOK™						
mm		PRODUCT SPEC 108-1836							
		APPLICATION SPEC 114-13000	SIZE		CAGE CODE		DRAWING NO		RESTRICTED TO
			A200779		C-1445057				
		WEIGHT -		SCALE 4:1		SHEET 1 OF 2		REV D	
		CUSTOMER DRAWING							
MATERIAL		FINISH							
									

