
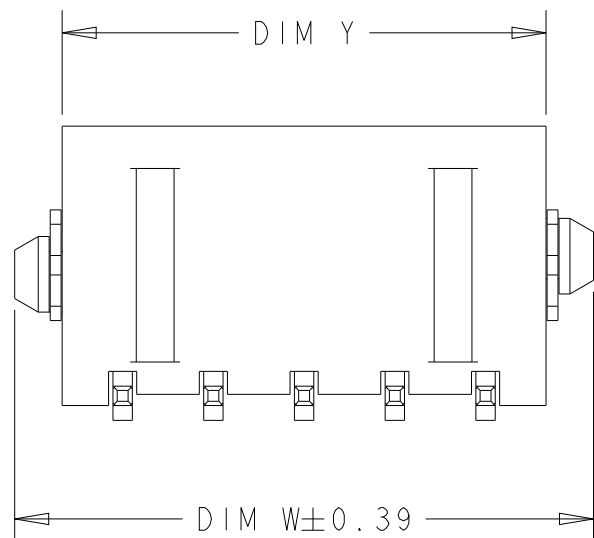
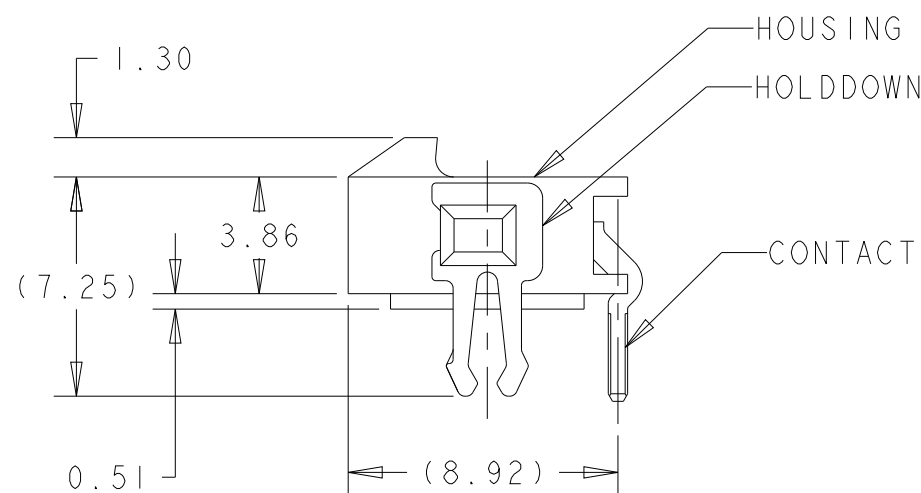
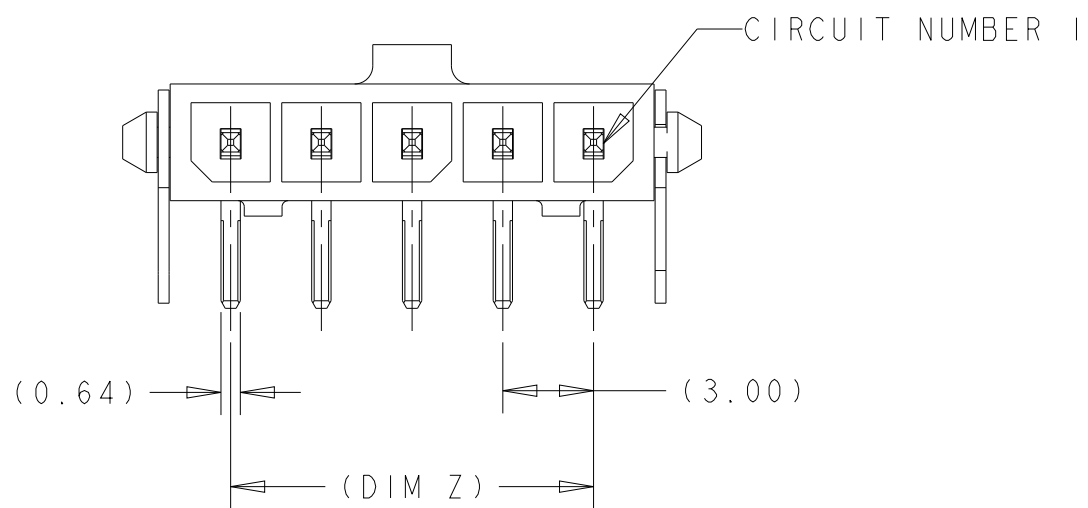


THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	-
© COPYRIGHT copyright.d87e-	ALL RIGHTS RESERVED.	

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A5	REVISED PER ECN-23-242776	15DEC2023	WLS	VS
	B	REVISED PER ECN-25-316179	07MAY2025	WLS	JP

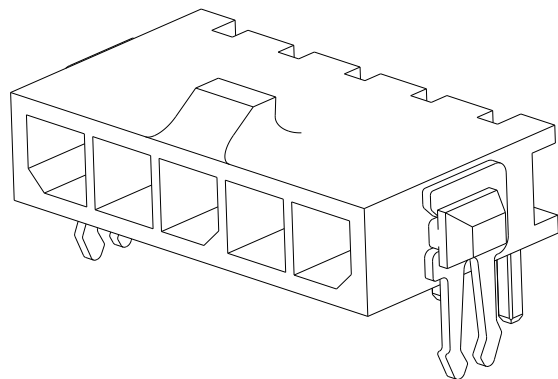

- ① MATERIAL: HOUSING - UL 94V-O RATED HIGH TEMP NYLON, COLOR BLACK.
CONTACTS - BRASS
HOLDDOWNS: - PHOSPHOR BRONZE.
- ② RECOMMENDED PC BOARD THICKNESS OF 1.57.
- ③ PLATING: CONTACTS - 0.76μm MINIMUM GOLD,
OR
0.0762μm MINIMUM GOLD FLASH OVER 0.69μm MINIMUM PALLADIUM NICKEL,
ON MATING AREA PER TE CONNECTIVITY'S DISCRETION,

2.54μm MINIMUM MATTE TIN ON SOLDER TAILS,

ALL OVER 1.27μm MINIMUM NICKEL.

HOLDDOWNS: 2.54μm MINIMUM MATTE TIN OVER 1.27μm MINIMUM NICKEL.
- 4 COUNTERPART RECOMMENDED IS PN 1445022 OR 2008571 (DASH ACC. TO NUMBER OF POSITION).
- 5 FOR REELING DIRECTION AND PACKAGING TYPE, SEE SPECIFICATION 114-13000.

OBSOLETE	-33.00	37.43	37.00	40.14	12	3-1445097-2
OBSOLETE	-30.00	34.43	34.00	37.14	11	3-1445097-1
OBSOLETE	-27.00	31.43	31.00	34.14	10	3-1445097-0
OBSOLETE	-24.00	28.43	28.00	31.14	9	2-1445097-9
OBSOLETE	21.00	25.43	25.00	28.14	8	2-1445097-8
	-18.00	22.43	22.00	25.14	7	2-1445097-7
	15.00	19.43	19.00	22.14	6	2-1445097-6
	12.00	16.43	16.00	19.14	5	2-1445097-5
	9.00	13.43	13.00	16.14	4	2-1445097-4
	6.00	10.43	10.00	13.14	3	2-1445097-3
	3.00	7.43	7.00	10.14	2	2-1445097-2
	DIM Z	DIM V	DIM Y	DIM W	NO. OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J ROOT 090CT2000		 TE Connectivity	
		CHK K WHITAKER 17-APR-2001			
DIMENSIONS:		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME RIGHT ANGLE THRU HOLE HDR ASSY, 0.76Au or 0.69PdNi CNTC, THRU HOLE HOLDDOWNS, SGL ROW, MICRO MATE-N-LOK™	
mm		APVD C JONES 17-APR-2001			
		PRODUCT SPEC			
		108-1836			
		APPLICATION SPEC		SIZE	
		114-13000		CAGE CODE	
MATERIAL		WEIGHT		DRAWING NO	
		-		A200779	
FINISH				C-1445097	
		CUSTOMER DRAWING		RESTRICTED TO	
				-	
				SCALE	SHEET
				4:1	1 OF 2
				REV	B

