

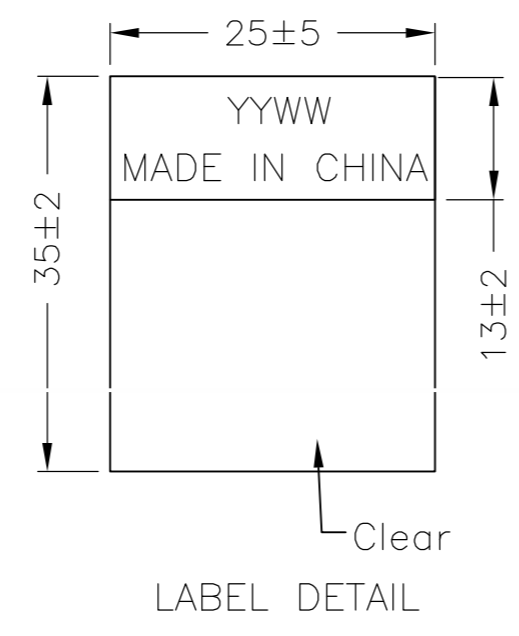


| | | | | | | | |
|-----|------|-----------|-----|---------------------------|---------|-----|------|
| LOC | DIST | REVISIONS | | | | | |
| GP | 00 | P | LTR | DESCRIPTION | DATE | DWN | APVD |
| | | U3 | | REVISED PER ECO-21-002353 | 26FEB21 | AP | YX |

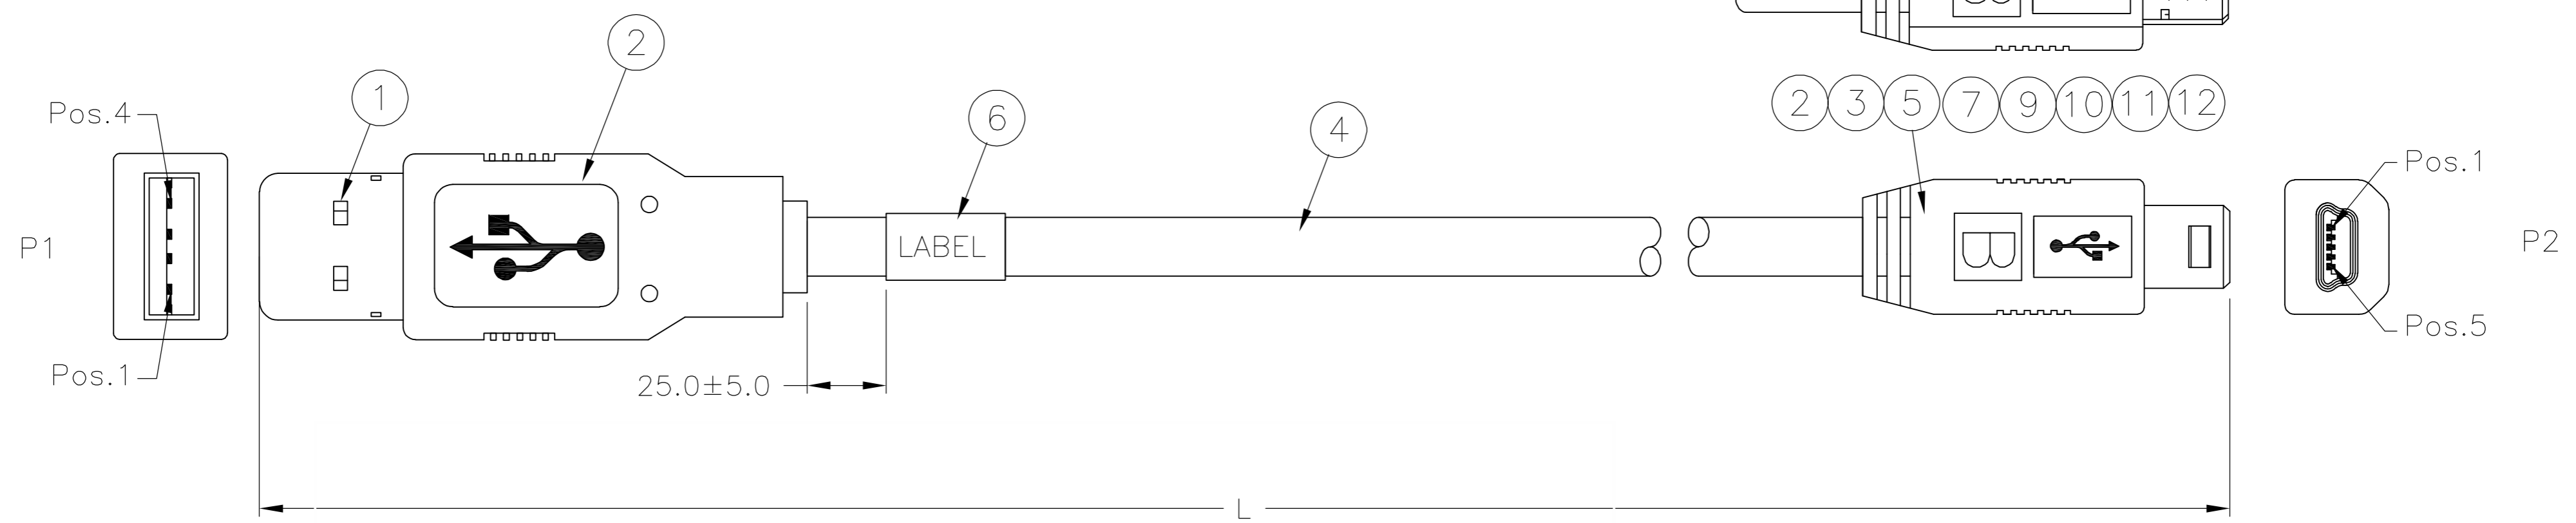

- NOTES:
- 100% ELECTRICAL TEST.
 - PACKAGE: 1PCS/PE BAG.
 - PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TEC-138-702.

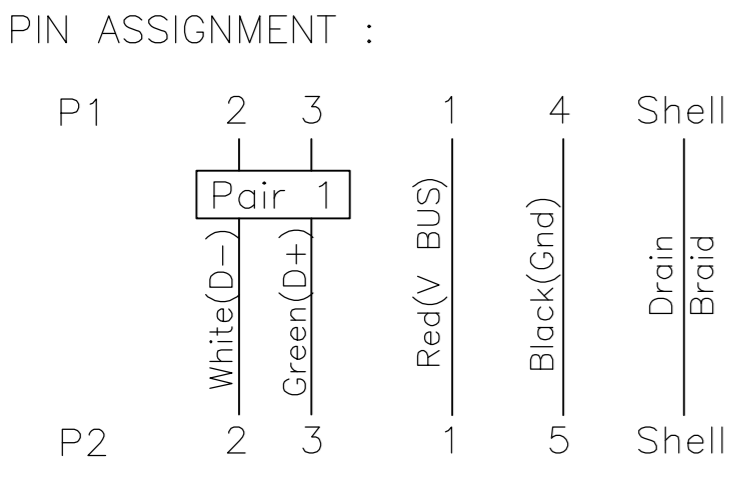

| PART NO. | LENGTH(L) | CABLE AWG | CABLE O.D. (REF) |
|-------------------------------|--------------------------------------|-------------------|--------------------|
| 1496476-1 | 1000 ⁺⁰ ₋₃₀ MM | 1P*28AWG+2C*26AWG | 4.2 mm |
| 1496476-2 | 1500 ⁺⁰ ₋₃₀ MM | 1P*28AWG+2C*24AWG | 4.5 mm |
| 1496476-3 | 2000 ⁺⁰ ₋₃₀ MM | 1P*28AWG+2C*24AWG | 4.5 mm |
| OBSOLETE 1496476-4 | 3000 ⁺⁰ ₋₅₀ MM | 1P*25AWG+2C*22AWG | 5.2 mm |
| OBSOLETE 1496476-5 | 5000 ⁺⁰ ₋₅₀ MM | 1P*25AWG+2C*20AWG | 5.2 mm |
| OBSOLETE 1496476-6 | 305 ⁺⁰ ₋₃₀ MM | 1P*28AWG+2C*28AWG | 3.5 mm |

OBSOLETE

| | | | | | | | | |
|----|----|----|----|----|----|-----|--|------|
| - | - | - | - | AR | AR | MR | UL TAPE, W: 9MM, COLOR: BLACK | 12 |
| 1 | - | - | - | - | - | PC | CONNECTOR,MINI USB B TYPE | 11 |
| - | - | - | 1 | 1 | 1 | PC | CONNECTOR,MINI USB B TYPE | 10 |
| AR | AR | AR | AR | AR | AR | MR | Heat Shrink Tubing 1.0MM BLACK | 9 |
| AR | AR | AR | AR | AR | AR | MR | Copper Foil, W: 5.0MM | 8 |
| - | AR | AR | - | - | - | MR | Heat Shrink Tubing, 1.5mm, Color: Black | 7 |
| - | - | - | - | - | AR | MR | PVC TUBE, ID: 1.5MM, COLOR: BLACK | 7 |
| AR | - | - | AR | AR | - | MR | Heat Shrink Tubing, 1.0mm, Color: Black | 7 |
| 1 | 1 | 1 | 1 | 1 | 1 | PC | LABEL , 25*35mm. | 6 |
| AR | AR | AR | AR | AR | AR | MR | Copper Foil, W: 10.0MM. | 5 |
| AR | AR | AR | AR | AR | AR | MR | USB 2.0 Cable, 1P(Signal)+2C(Power)+Al/Mylar +Drain+Braid, Color: Black. | 4 |
| - | - | 1 | - | - | - | PC | Mini USB, B PLUG, SOLDER TYPE | 3 |
| AR | AR | AR | AR | AR | AR | KG | Overmolded PVC,Color: Black(BK01).Shore A 80±5 | 2 |
| 1 | 1 | 1 | 1 | 1 | 1 | PC | USB A Type Solder Contacts: Gold Plated 30U" Shell: Nickel Plated, Insulation: White | 1 |
| -6 | -5 | -4 | -3 | -2 | -1 | U/M | DESCRIPTION | ITEM |

THIS DRAWING IS A CONTROLLED DOCUMENT.

| | | |
|------|-----------|-----------|
| DWN | BOVEY LIU | 28/JUN/01 |
| CHK | BEVIN | 28/JUN/01 |
| APVD | MARK | 28/JUN/01 |

TE Connectivity

CABLE ASSY, MINI USB B TYPE TO USB A TYPE

SCALE: N.T.S. SHEET 1 OF 1 REV U3