


1 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

2 OBSOLETE


DO NOT SCALE

DIMENSIONS IN MM.



C.A.D. FILE CODE
C154717

PART NUMBER	MATERIAL	FINISH	REELING	LOOSE PIECE REF. ONLY
154717-1	BRASS	NONE	STANDARD	341001-1
154717-2	PHOS. BRONZE	NONE	STANDARD	341001-2
154717-3	BRASS	TIN	STANDARD	341001-3
154717-4	PHOS. BRONZE	TIN	STANDARD	341001-4
154717-5	PHOS. BRONZE	NONE	STANDARD	341001-5
154717-6	BRASS	PRE-TIN	STANDARD	341001-6
154717-7	PHOS. BRONZE	PRE-TIN	STANDARD	341001-7
154717-8	PHOS. BRONZE	SILVER	STANDARD	341001-8
154717-9	BRASS	SILVER	STANDARD	341001-9
154717-10	OBSOLETE	OBSOLETE	OBSOLETE	---
1-154717-1	BRASS	NONE	REV. REEL VERSION-1	---
1-154717-2	PHOS. BRONZE	NONE	REV. REEL VERSION-2	---
1-154717-3	PHOS. BRONZE	PRE-TIN	STANDARD	---
1-154717-4	BRASS	TIN	REV. REEL VERSION-3	---
1-154717-5	PHOS. BRONZE	TIN	REV. REEL VERSION-4	---
1-154717-6	PHOS. BRONZE	TIN	STANDARD (SPLICE FREE VERSION)	---

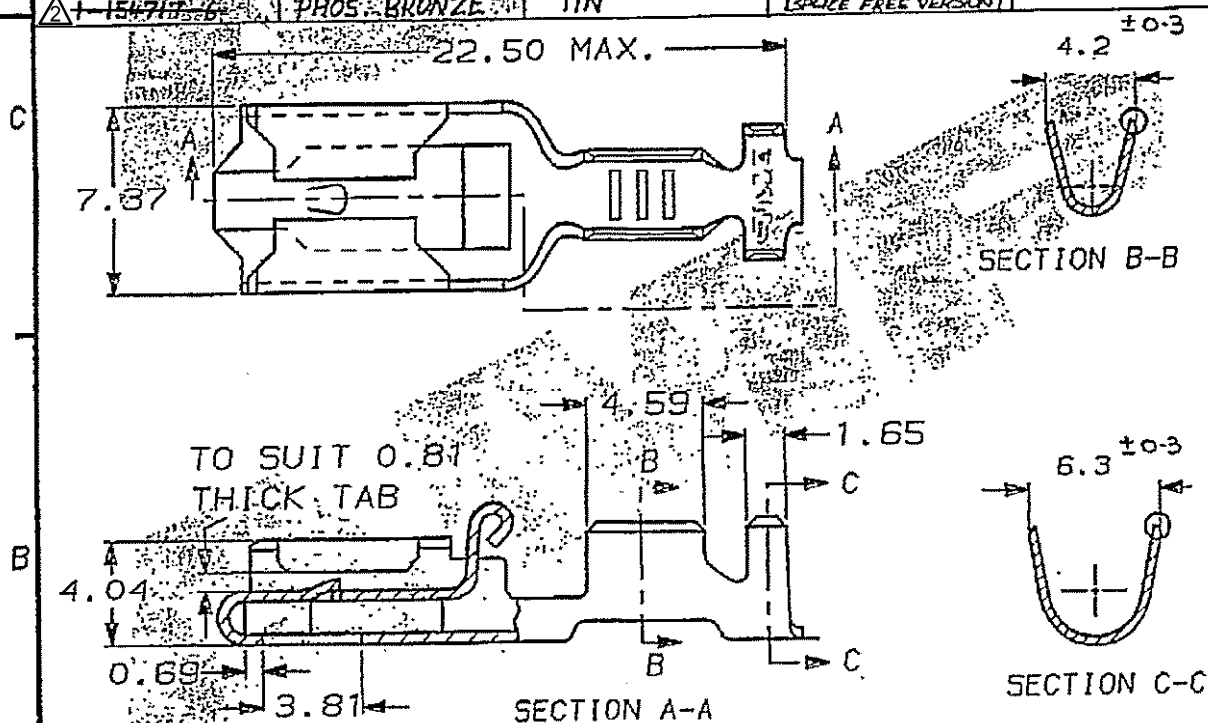

WIRE RANGE 2.5 TO 4.0mm²

INSULATION RANGE 3.6 TO 4.3mm DIA.

CUSTOMER DWG
FOR REFERENCE ONLY

RELEASED FOR PUBLICATION
ORIGINAL 1974

TOLERANCES
UNLESS OTHERWISE
STATED
DEC ± 0.5
ANGLES ± 1°

DR. D.A.BARRATT

27.11.91

CH. D.TERRY

APP. D.A.BARRATT



TE Connectivity

NAME POSITIVE LOCK RECEPTACLE

AR4	REVISED PER ECR-20-005366	13APR2020	SS	DL
AR3	ECR-15-007886	17JUN15	NK	GH
REV	DESCRIPTION	DATE	DWN	APVD

SCALE	LOC	SIZE	DWG.No.	REV	SHEET
4/1	E	A4	C154717	AR4	1/1

FORMAT 22/05/85