
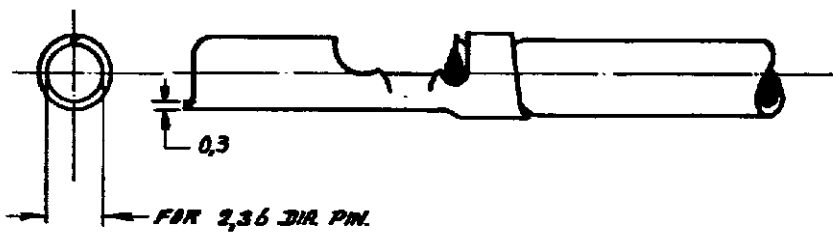


C-160208-E

REVISIONS				
LTR	DESCRIPTION	DATE	DWN	APVD
G1	REVISED PER-ECO-09-022178	21SEP09	KK	AEG
G2	REVISED PER ECR-17-013411	15SEP2017	BDA	FV

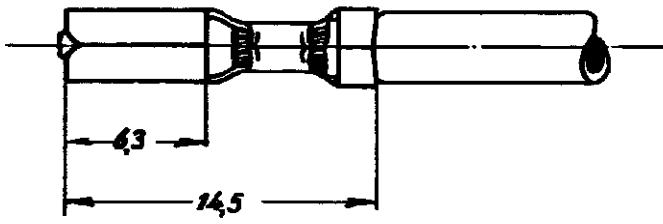

△ OBSOLETE

△ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

1-160208-2	STEEL	NICKEL
1-160208-1	PHOS. BRONZE	TIN
4-160208-0	STEEL	NICKEL WEL CO
1-160208-7	BRASS	NONE
1-160208-5	BRASS	NICKEL
160208-4	PHOS. BRONZE	NONE
160208-3	BRASS	SILVER
160208-2	BRASS	TIN
160208-1	BRASS	NONE

* REELED WITH PAPER.
160208-7 SUITABLE FOR AMP-D-MOTOR APPLICATION (12000 PLS. PER REEL)

CUSTOMER COPY FOR REFERENCE ONLY

©1966 BY AMP-HOLLAND N.V. ALL RIGHTS RESERVED AMP PRODUCTS COVERED BY PATENTS AND/OR PATENTS PENDING.



WIRE RANGE	INSUL. RANGE	FIRST USED
25-48 AWG	23-33 P.M.M.	

SCALE	LOC	SIZE	NO	REV
4:1	H	A	C-160208-E	G2

ORDER NO.	MATERIAL	PLATING
DR. P. BONDY	28/ DATE DE	DATE
DATE	APP	DATE

NAME **PIN RECEPTACLE**

DIMENSIONS IN MM DO NOT SCALE PRINT