


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
GP	00		D1	REVISED PER ECO-11-004835	11MAR11	RK	HMR


D

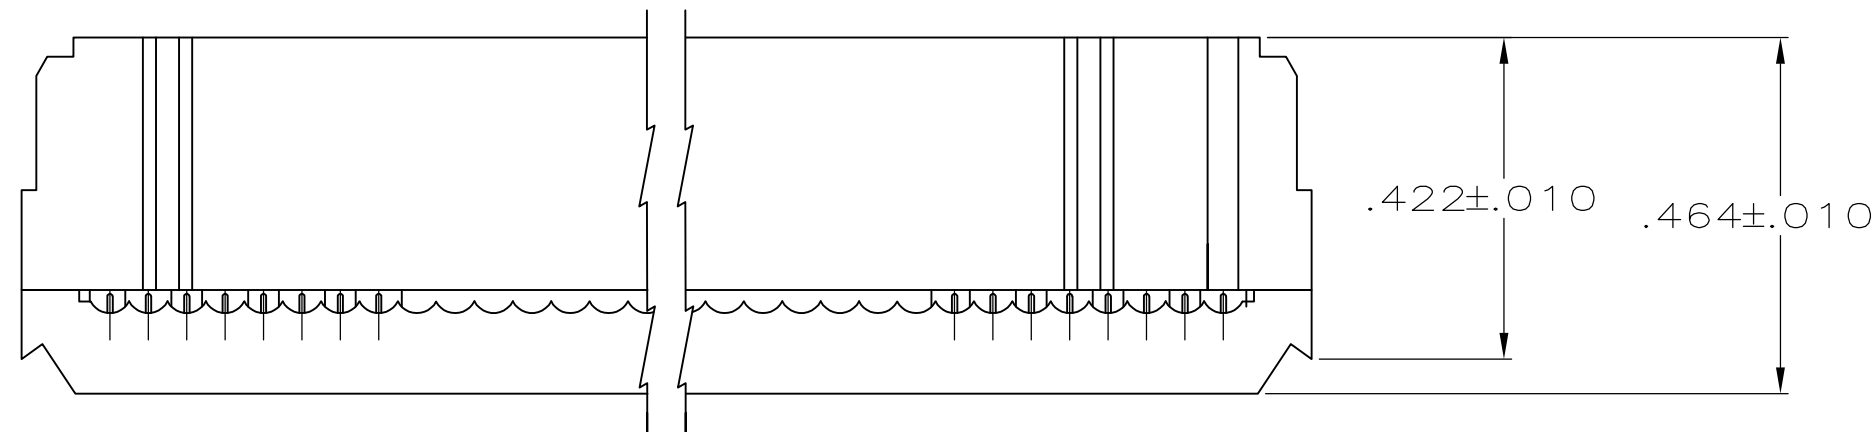



TERMINATED VIEW

- 1
- 2
- 3
- 4
- UL RATED 94V-0 THERMOPLASTIC, COLOR: BLACK.
- PHOSPHOR BRONZE PER QQ-B-750.
- PLATED WITH .000015 MIN GOLD IN LOCALIZED GOLD PLATE AREA, .000050 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
OR
GOLD FLASH OVER PALLADIUM-NICKEL PLATE .000015 MIN TOTAL IN LOCALIZED GOLD PLATE AREA, .000050 MIN TIN ON TERMINATION END, ALL OVER .000050 MIN NICKEL ON ENTIRE CONTACT.
- POLARIZING FEATURE DOES NOT EXIST ON SAME END AS THE POSN #1 INDICATOR ON 10 AND 14 POSN PRODUCT.

C

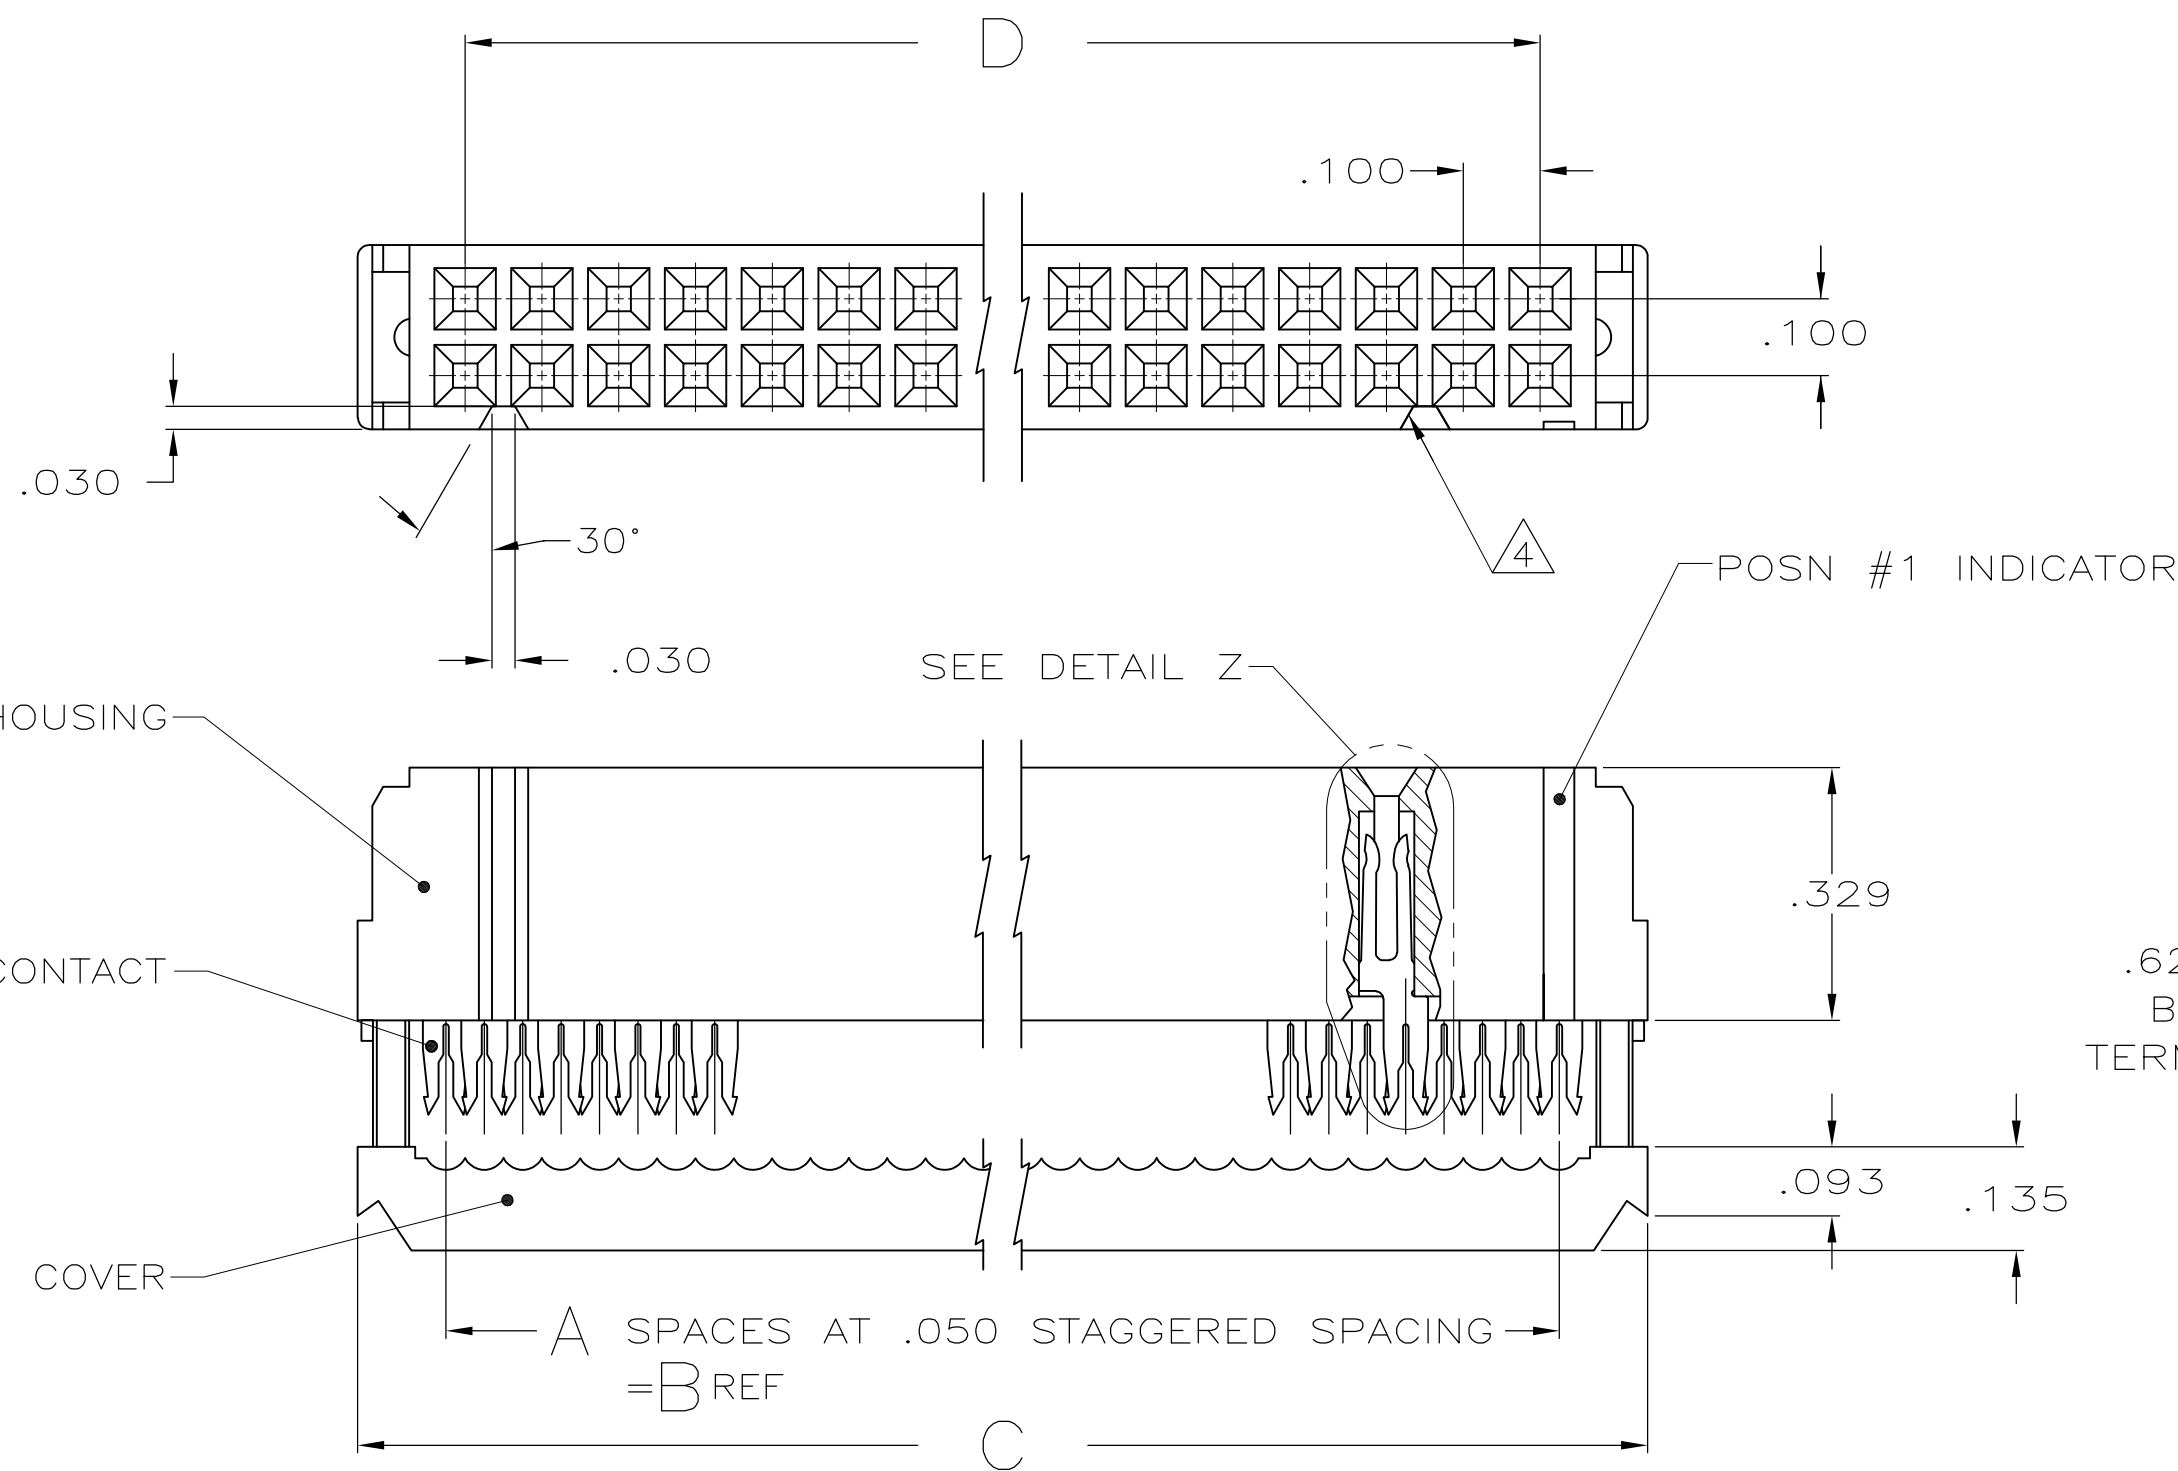


B

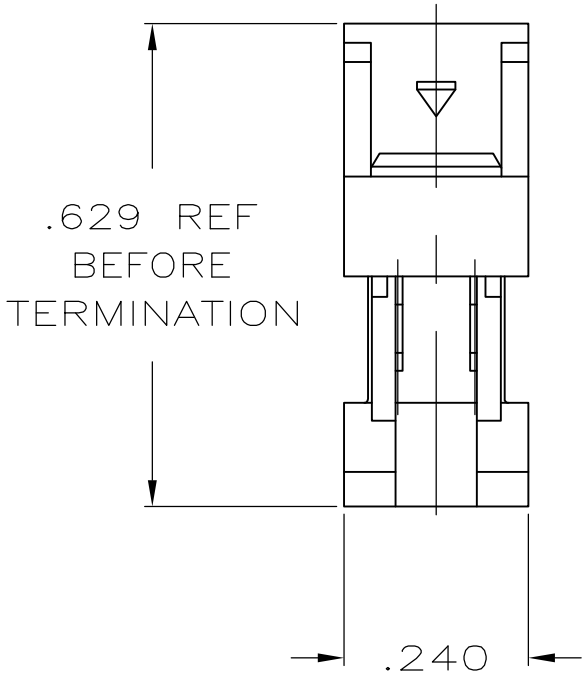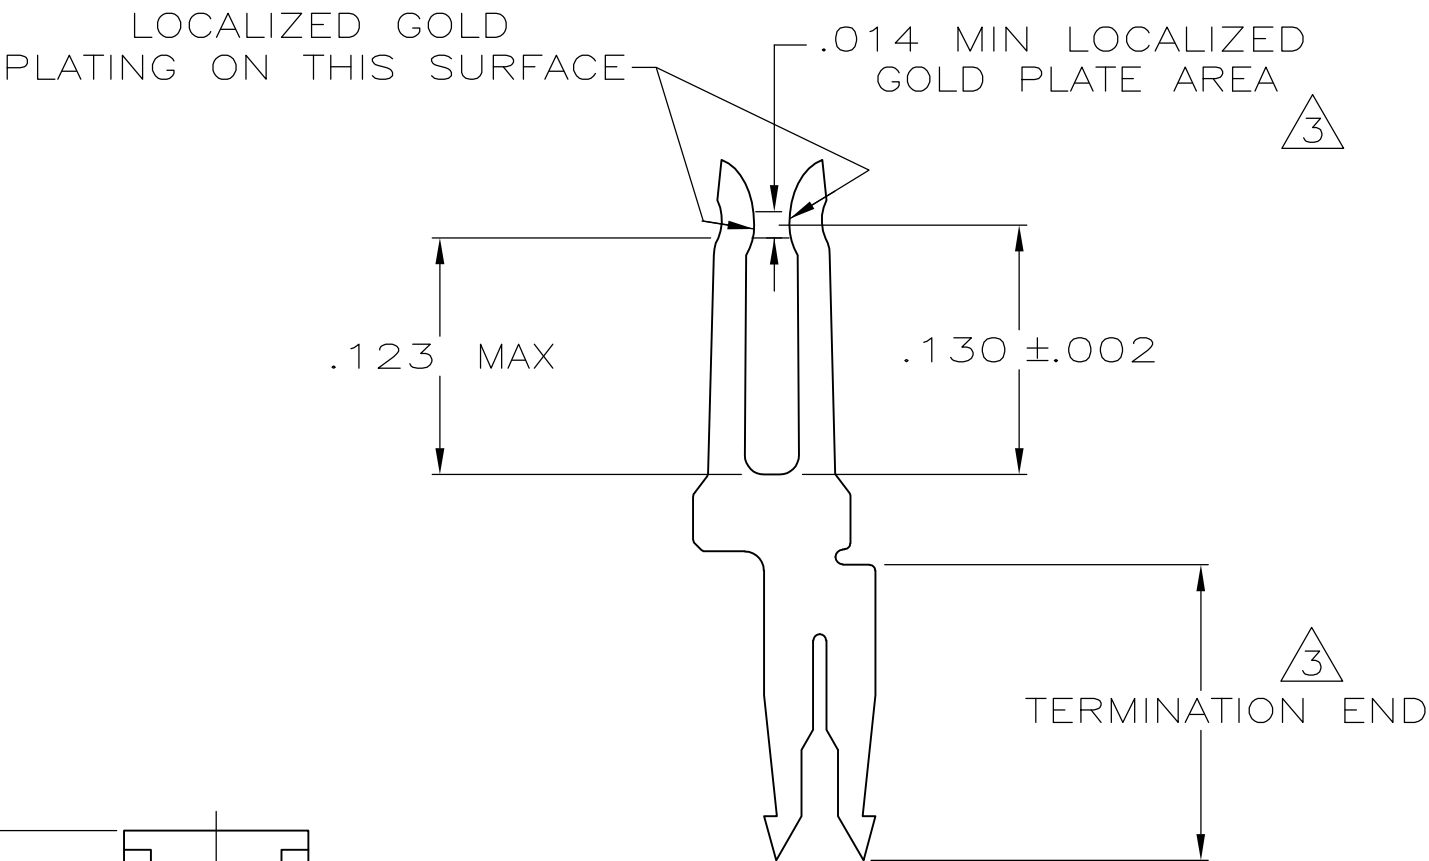

A

OBSOLETE	3.100	3.380	3.150	63	64	1-1658620-2
	2.900	3.180	2.950	59	60	1-1658620-1
	2.400	2.680	2.450	49	50	1-1658620-0
	1.900	2.180	1.950	39	40	1658620-9
	1.600	1.880	1.650	33	34	1658620-8
	1.400	1.680	1.450	29	30	1658620-7
	1.200	1.480	1.250	25	26	1658620-6
	1.100	1.380	1.150	23	24	1658620-5
	.900	1.180	.950	19	20	1658620-4
	.700	.980	.750	15	16	1658620-3
	.600	.880	.650	13	14	1658620-2
	.400	.680	.450	9	10	1658620-1
	D	C	B	A	NO OF POSN	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.				DWN R. SAMICK	22AUG03	 TE Connectivity									
				CHK C. ROHDE	22AUG03										
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD M. WALMSLEY	22AUG03	NAME		RECEPTACLE ASSY, MILITARY POLARIZATION, LEAD FREE, AMP-LATCH™ NOVO							
		0 PLC ± -		PRODUCT SPEC		SIZE CAGE CODE DRAWING NO RESTRICTED TO									
		1 PLC ± -		108-40000											
		2 PLC ± -		APPLICATION SPEC											
		3 PLC ± .005		114-40005											
		4 PLC ± -		WEIGHT											
MATERIAL		FINISH		-		A2		00779		C=1658620		-			
 				CUSTOMER DRAWING		SCALE		4:1		SHEET		1 of 1		REV D1	