
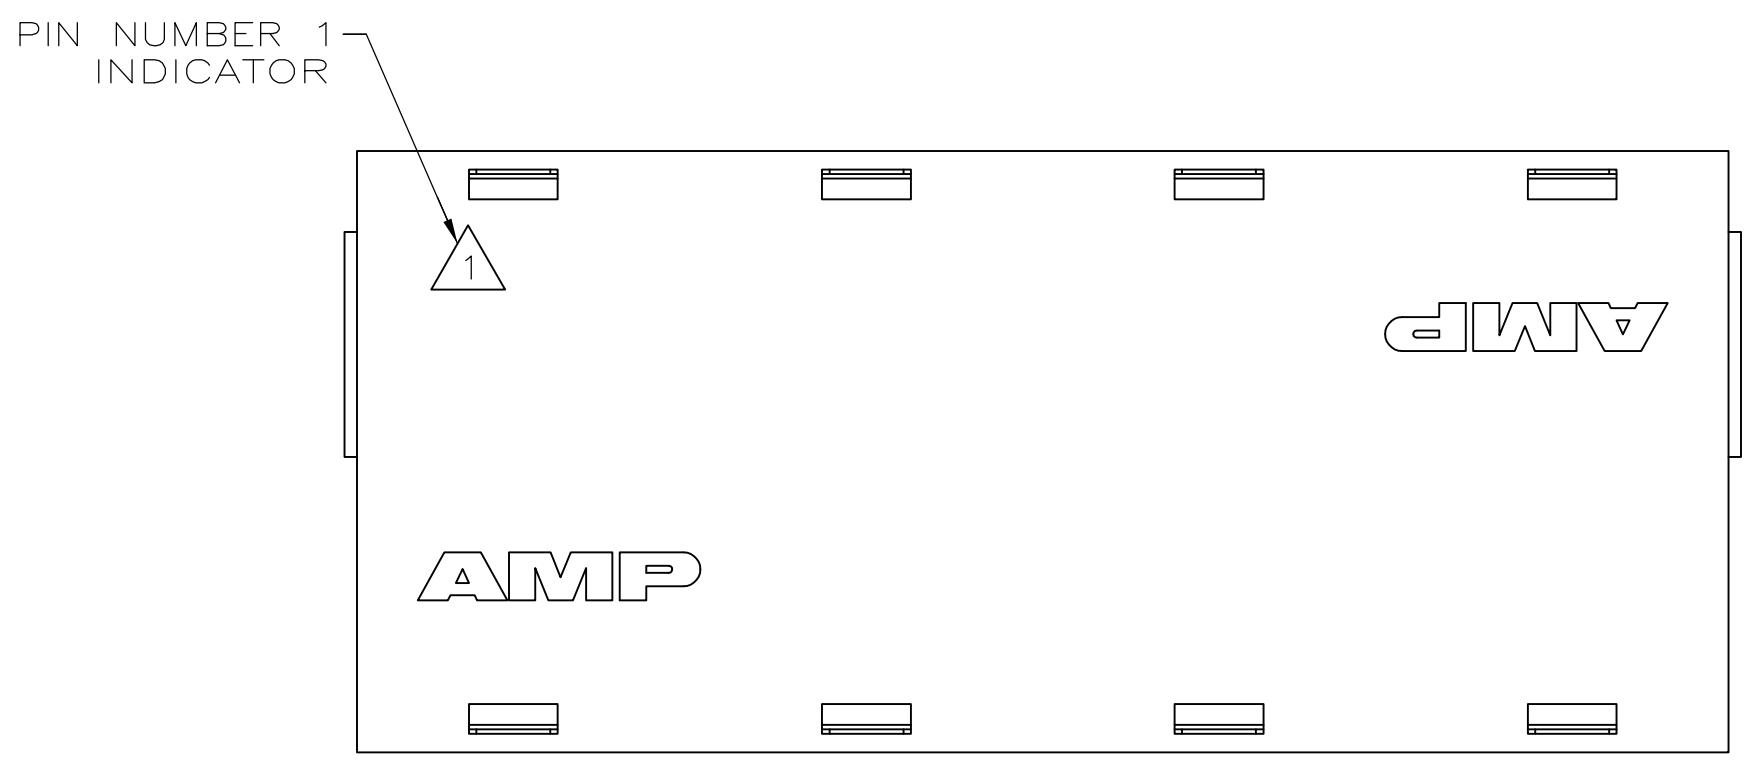
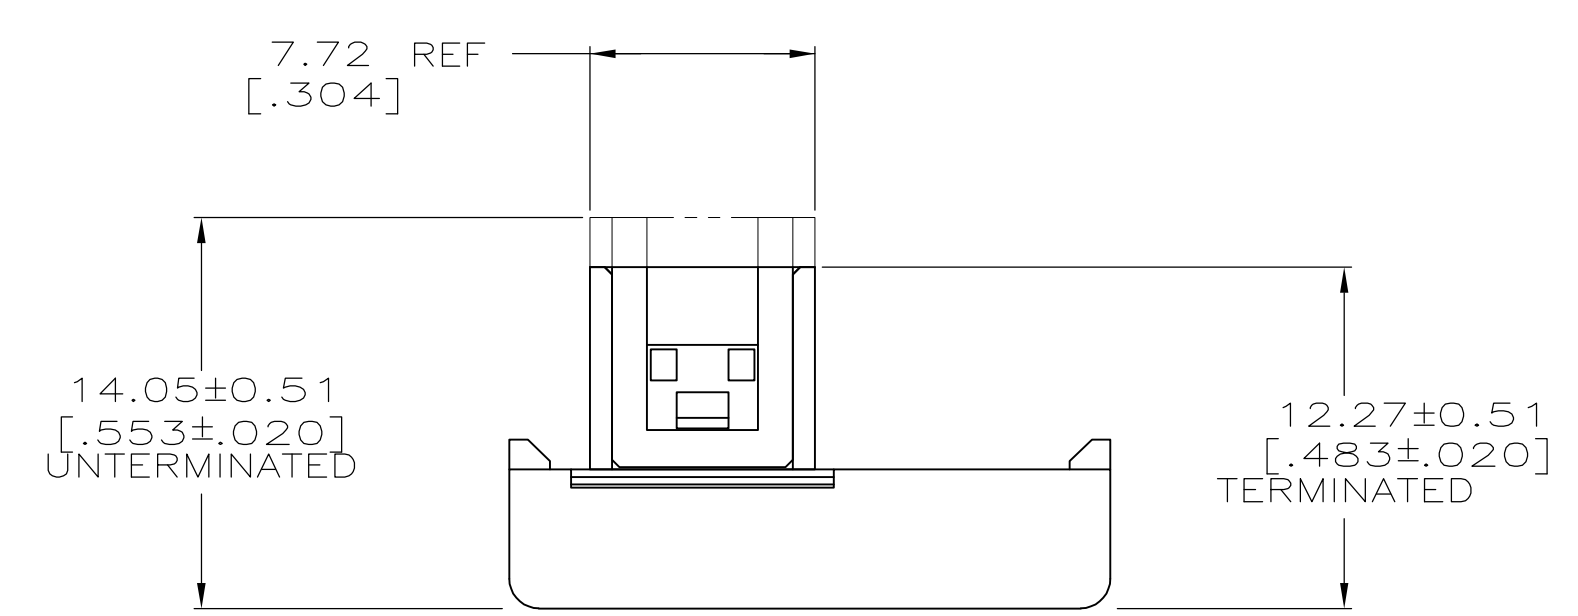
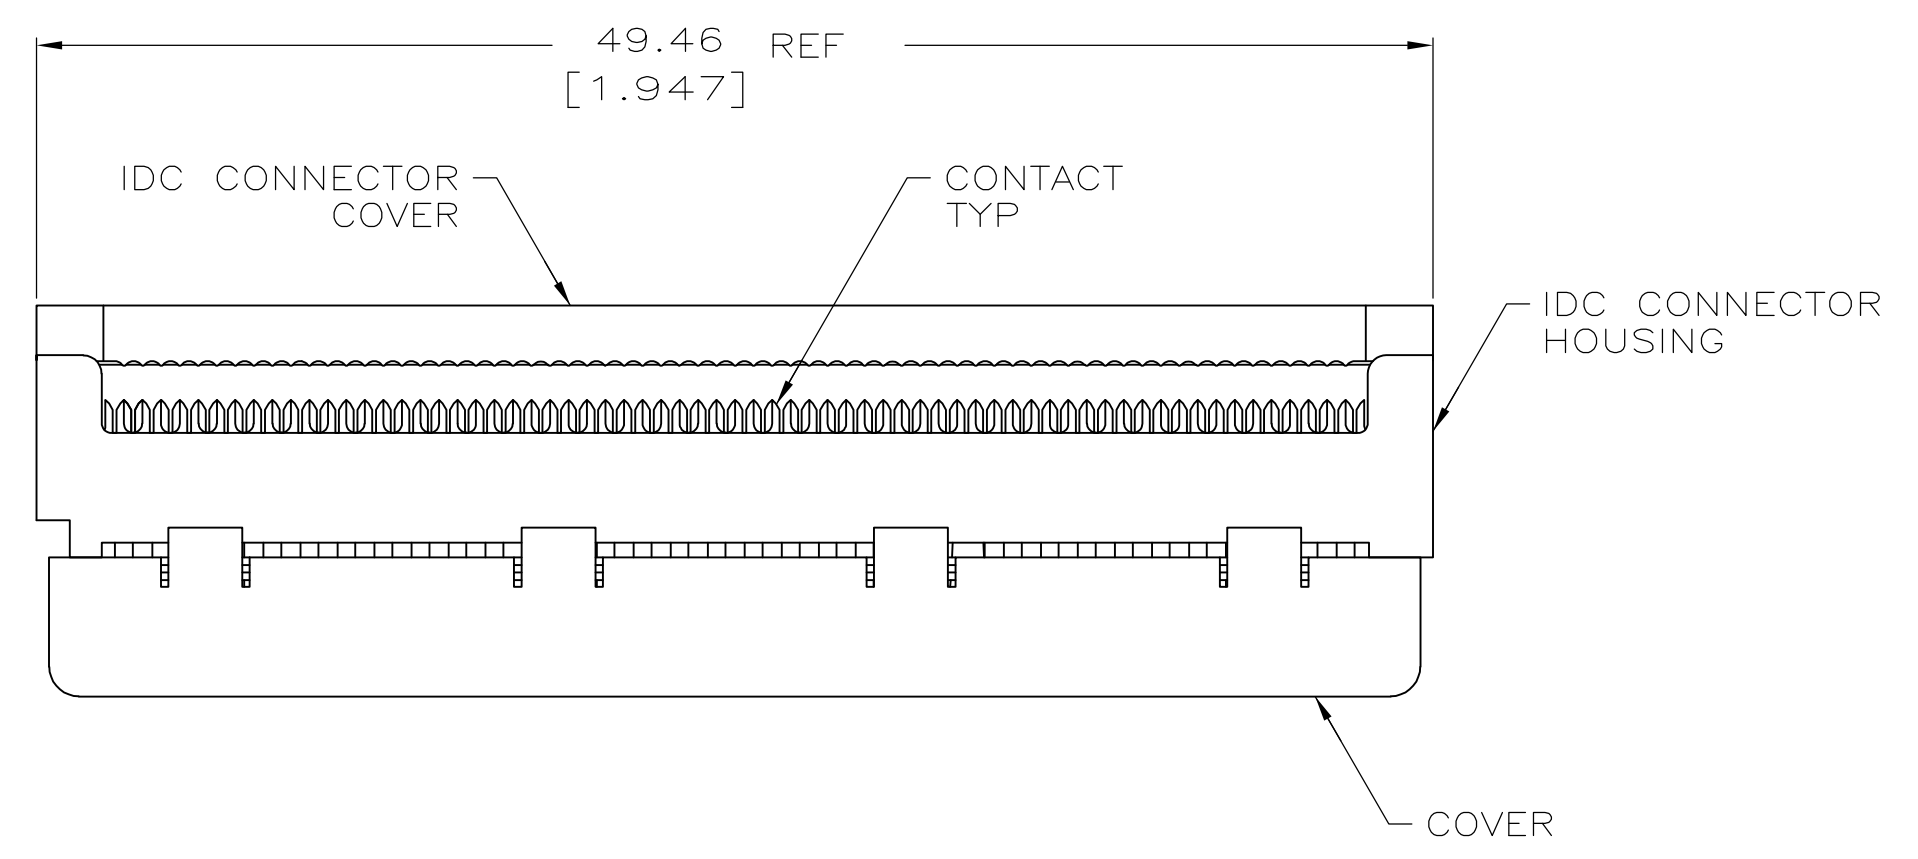


REVISONS		DATE	DWN	APVD
0	INITIAL RELEASE	24JAN05	TS	RCF
A	REV PER 0520-0545-05	04APR05	TS	RF
A1	ECR-13-011495	30OCT13	RK	JK
A2	ECR-14-012224	13AUG14	RK	JK

SIGNAL NAME (SINGLE-ENDED MODE)	SIGNAL NAME (LVD MODE)	CABLE CONDUCTOR NUMBER	SIGNAL NAME (LVD MODE)	SIGNAL NAME (SINGLE-ENDED MODE)
GROUND	+DB(12)	1	2	-DB(12)
GROUND	+DB(13)	3	4	-DB(13)
GROUND	+DB(14)	5	6	-DB(14)
GROUND	+DB(15)	7	8	-DB(15)
GROUND	+DB(P1)	9	10	-DB(P1)
GROUND	+DB(0)	11	12	-DB(0)
GROUND	+DB(1)	13	14	-DB(1)
GROUND	+DB(2)	15	16	-DB(2)
GROUND	+DB(3)	17	18	-DB(3)
GROUND	+DB(4)	19	20	-DB(4)
GROUND	+DB(5)	21	22	-DB(5)
GROUND	+DB(6)	23	24	-DB(6)
GROUND	+DB(7)	25	26	-DB(7)
GROUND	+DB(P)	27	28	-DB(P)
GROUND	GROUND	29	30	GROUND
GROUND	DIFFSENS	31	32	GROUND
TERMPWR	TERMPWR	33	34	TERMPWR
TERMPWR	TERMPWR	35	36	TERMPWR
OPEN	OPEN	37	38	OPEN
GROUND	GROUND	39	40	GROUND
GROUND	+ATN	41	42	-ATN
GROUND	GROUND	43	44	GROUND
GROUND	+BSY	45	46	-BSY
GROUND	+ACK	47	48	-ACK
GROUND	+RST	49	50	-RST
GROUND	+MSG	51	52	-MSG
GROUND	+SEL	53	54	-SEL
GROUND	+C/D	55	56	-C/D
GROUND	+REQ	57	58	-REQ
GROUND	+I/O	59	60	-I/O
GROUND	+DB(8)	61	62	-DB(8)
GROUND	+DB(9)	63	64	-DB(9)
GROUND	+DB(10)	65	66	-DB(10)
GROUND	+DB(11)	67	68	-DB(11)

CONTACT ASSIGNMENT TABLE

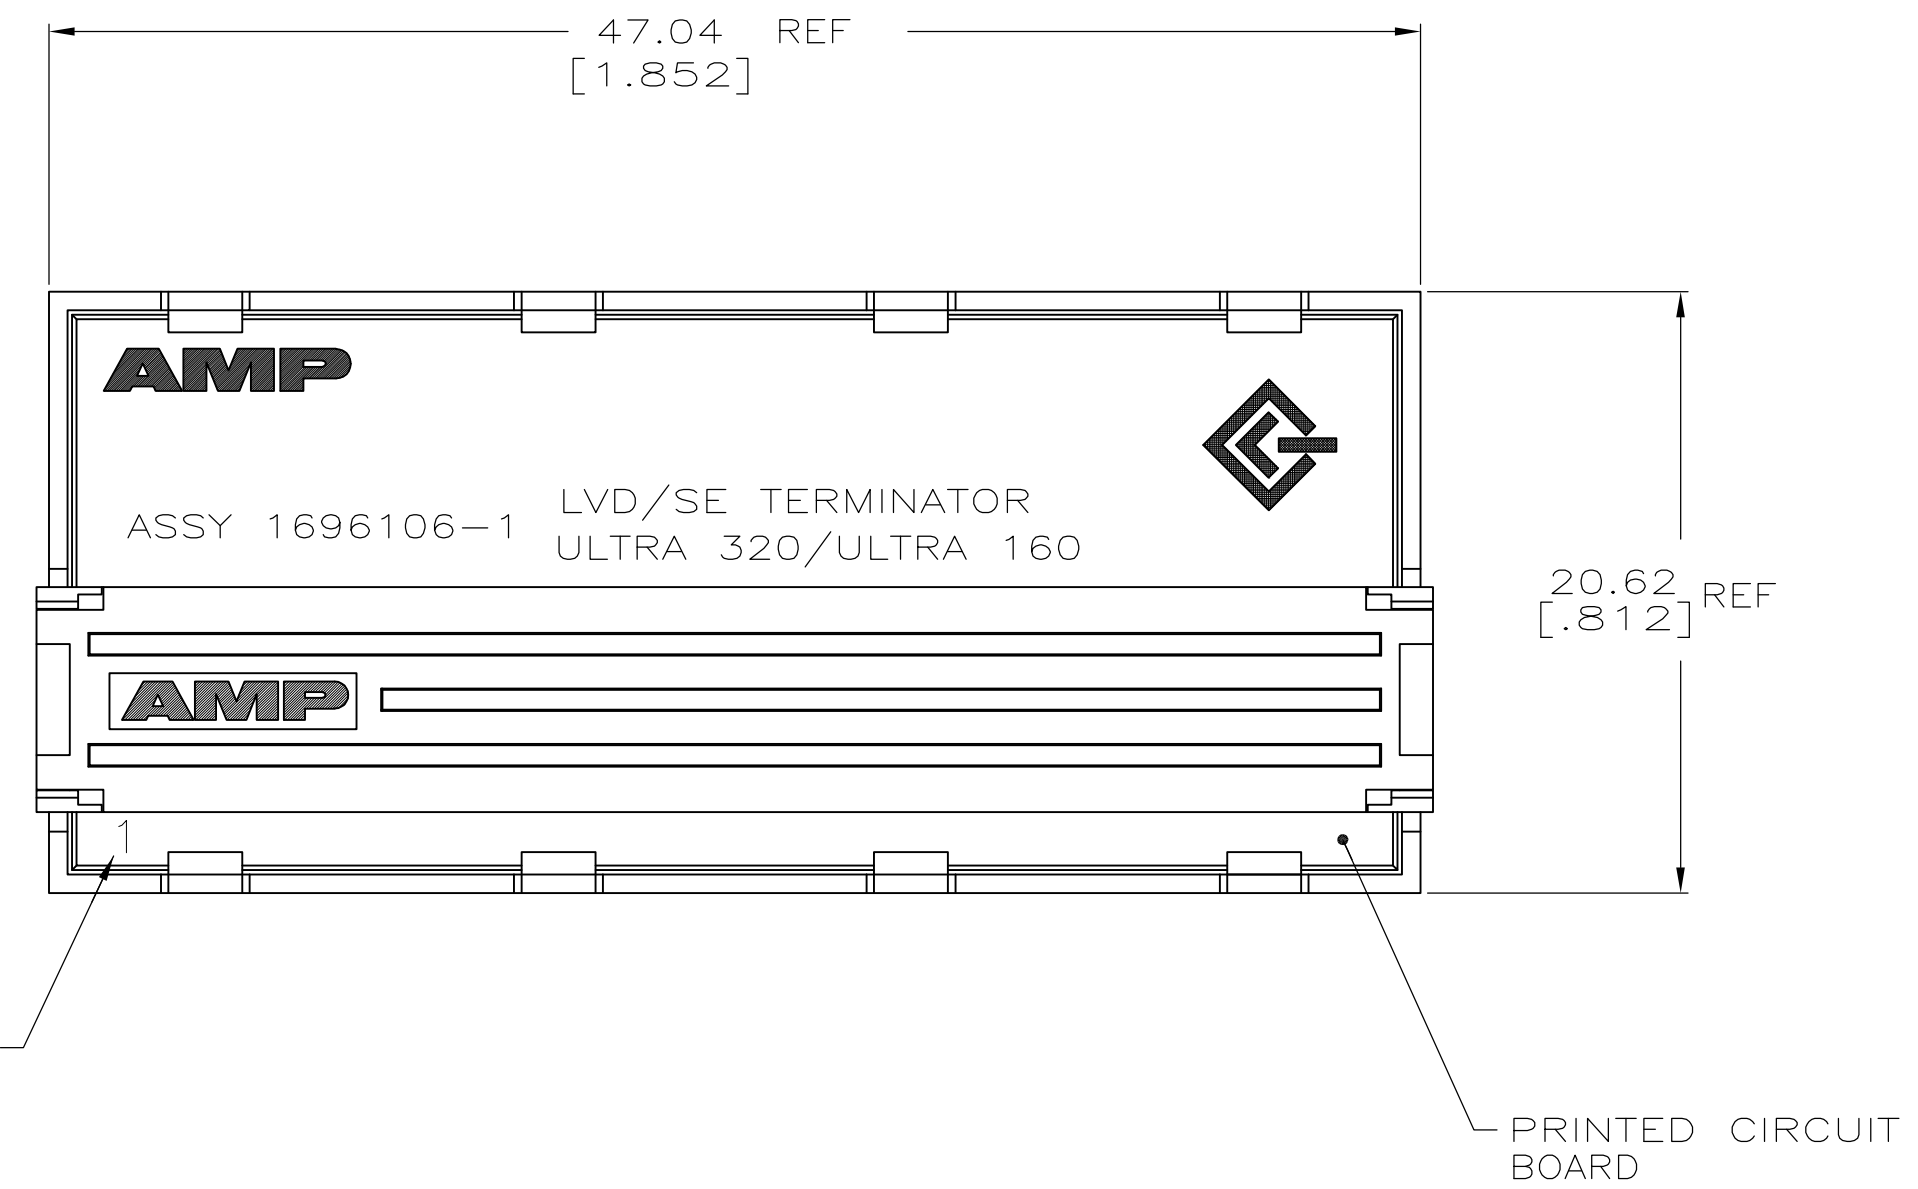

1. LOW VOLTAGE DIFFERENTIAL (LVD) TERMINATION CIRCUIT PER SP1-4 ELECTRICAL INTERFACE STANDARD.
2. PRODUCT TO MEET REQUIREMENTS OF EU DIRECTIVE 2002/95/EC.

1696106-1  
PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T. SMITH 24JAN05	TE Connectivity NAME TERMINATOR, ULTRA 320 (SP1-4) LVD/SE MULTIMODE .025CL IDC PRODUCT SPEC
DIMENSIONS: mm [INCHES]		CHK R.C.FOWLER 24JAN05	
0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±- FINISH ±-		APVD R.C.FOWLER 24JAN05	
MATERIAL	FINISH	APPLICATION SPEC	RESTRICTED TO
CUSTOMER DRAWING		SIZE A1 CAGE CODE [DRAWING NO] 100779	SCALE 4:1 SHEET 1 OF 1 REV A2