
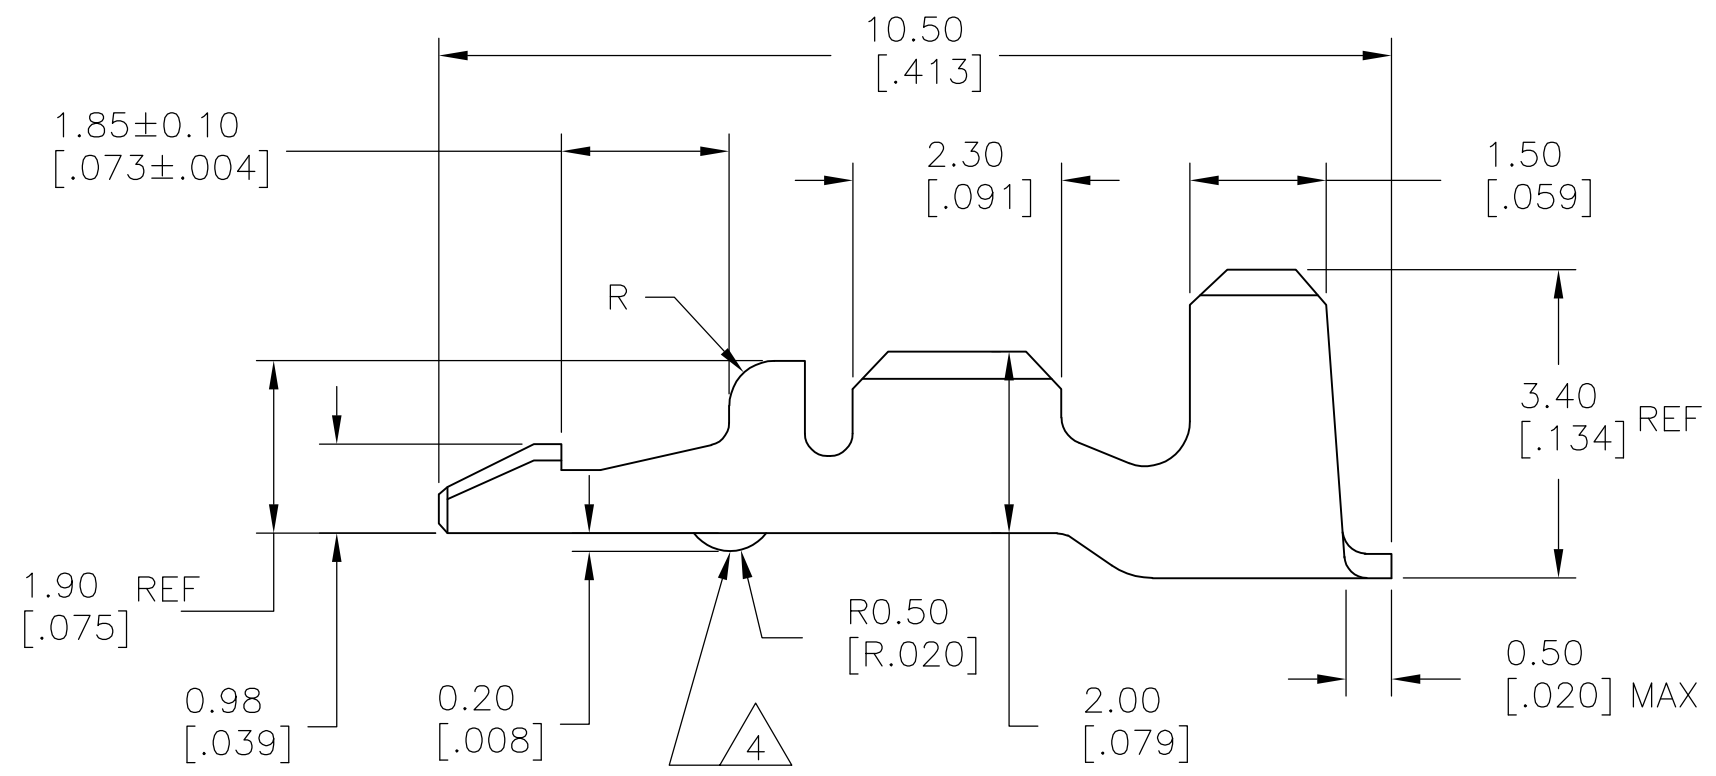


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		G	REVISED PER ECR-14-016288	19NOV2014	NK	GJ

- 1 PRODUCT SPECIFICATION: 108-5087.
 - 2 APPLICATION SPEC: 114-5014.
 - 3 PC BOARD THICKNESS 1.60±0.14 [.063±.005]
HOLE DIAMETER 1.20^{+0.00}/_{-0.03} [.043^{+0.000}/_{-0.001}] (DRILL SIZE).
- △ 4 170197-1 HAS A DIMPLE AS SHOWN
170197-2 HAS NO DIMPLE.

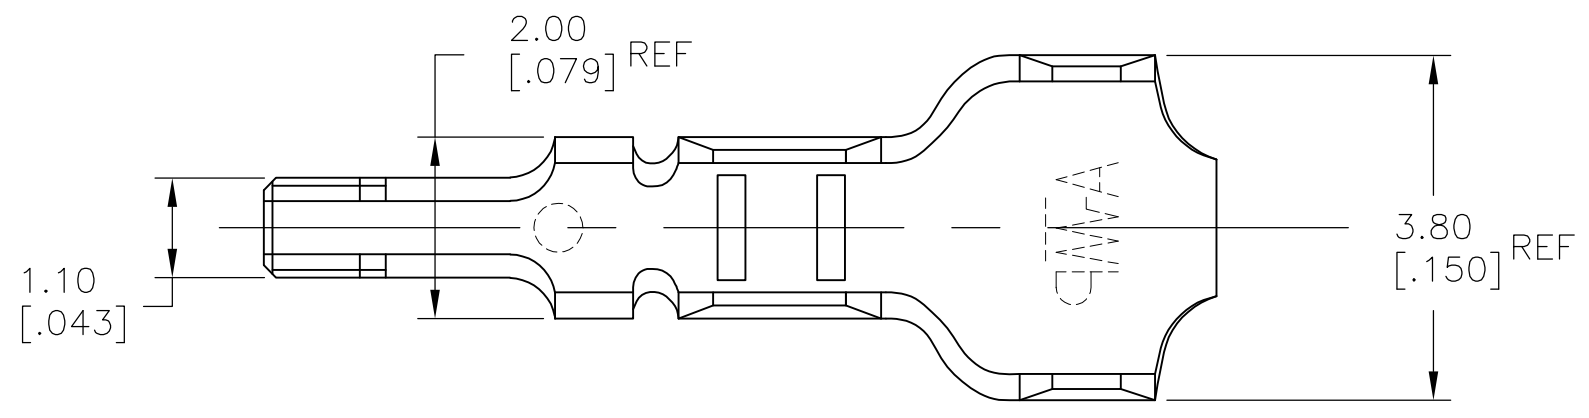

△ 4	170197-2
△ 4	170197-1
DIMPLE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN <i>H. Skubagzki</i> 08/01/74	STE TE Connectivity		
DIMENSIONS: mm [INCHES]		CHK <i>y. Selai</i> 08/01/74			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD <i>[Signature]</i>	NAME MINI AMP-IN		
0 PLC ± -		PRODUCT SPEC -	SIZE CAGE CODE DRAWING NO RESTRICTED TO		
1 PLC ± -		APPLICATION SPEC -	A3 00779 C-170197		
2 PLC ± 0.40 [.015]		WEIGHT -	SCALE 12:1 SHEET 1 OF 1 REV G		
3 PLC ± -		CUSTOMER DRAWING			
4 PLC ± -					
ANGLES ± 1°					
WIRE RANGE 0.20~0.56 mm ² [.00031~.00086 SQ IN] (AWG #24-#20)		MATERIAL BRASS			
INSULATION DIA 1.60~2.30 mm [.063~.090 IN]		FINISH POST PLATED TIN OVER NICKEL			