


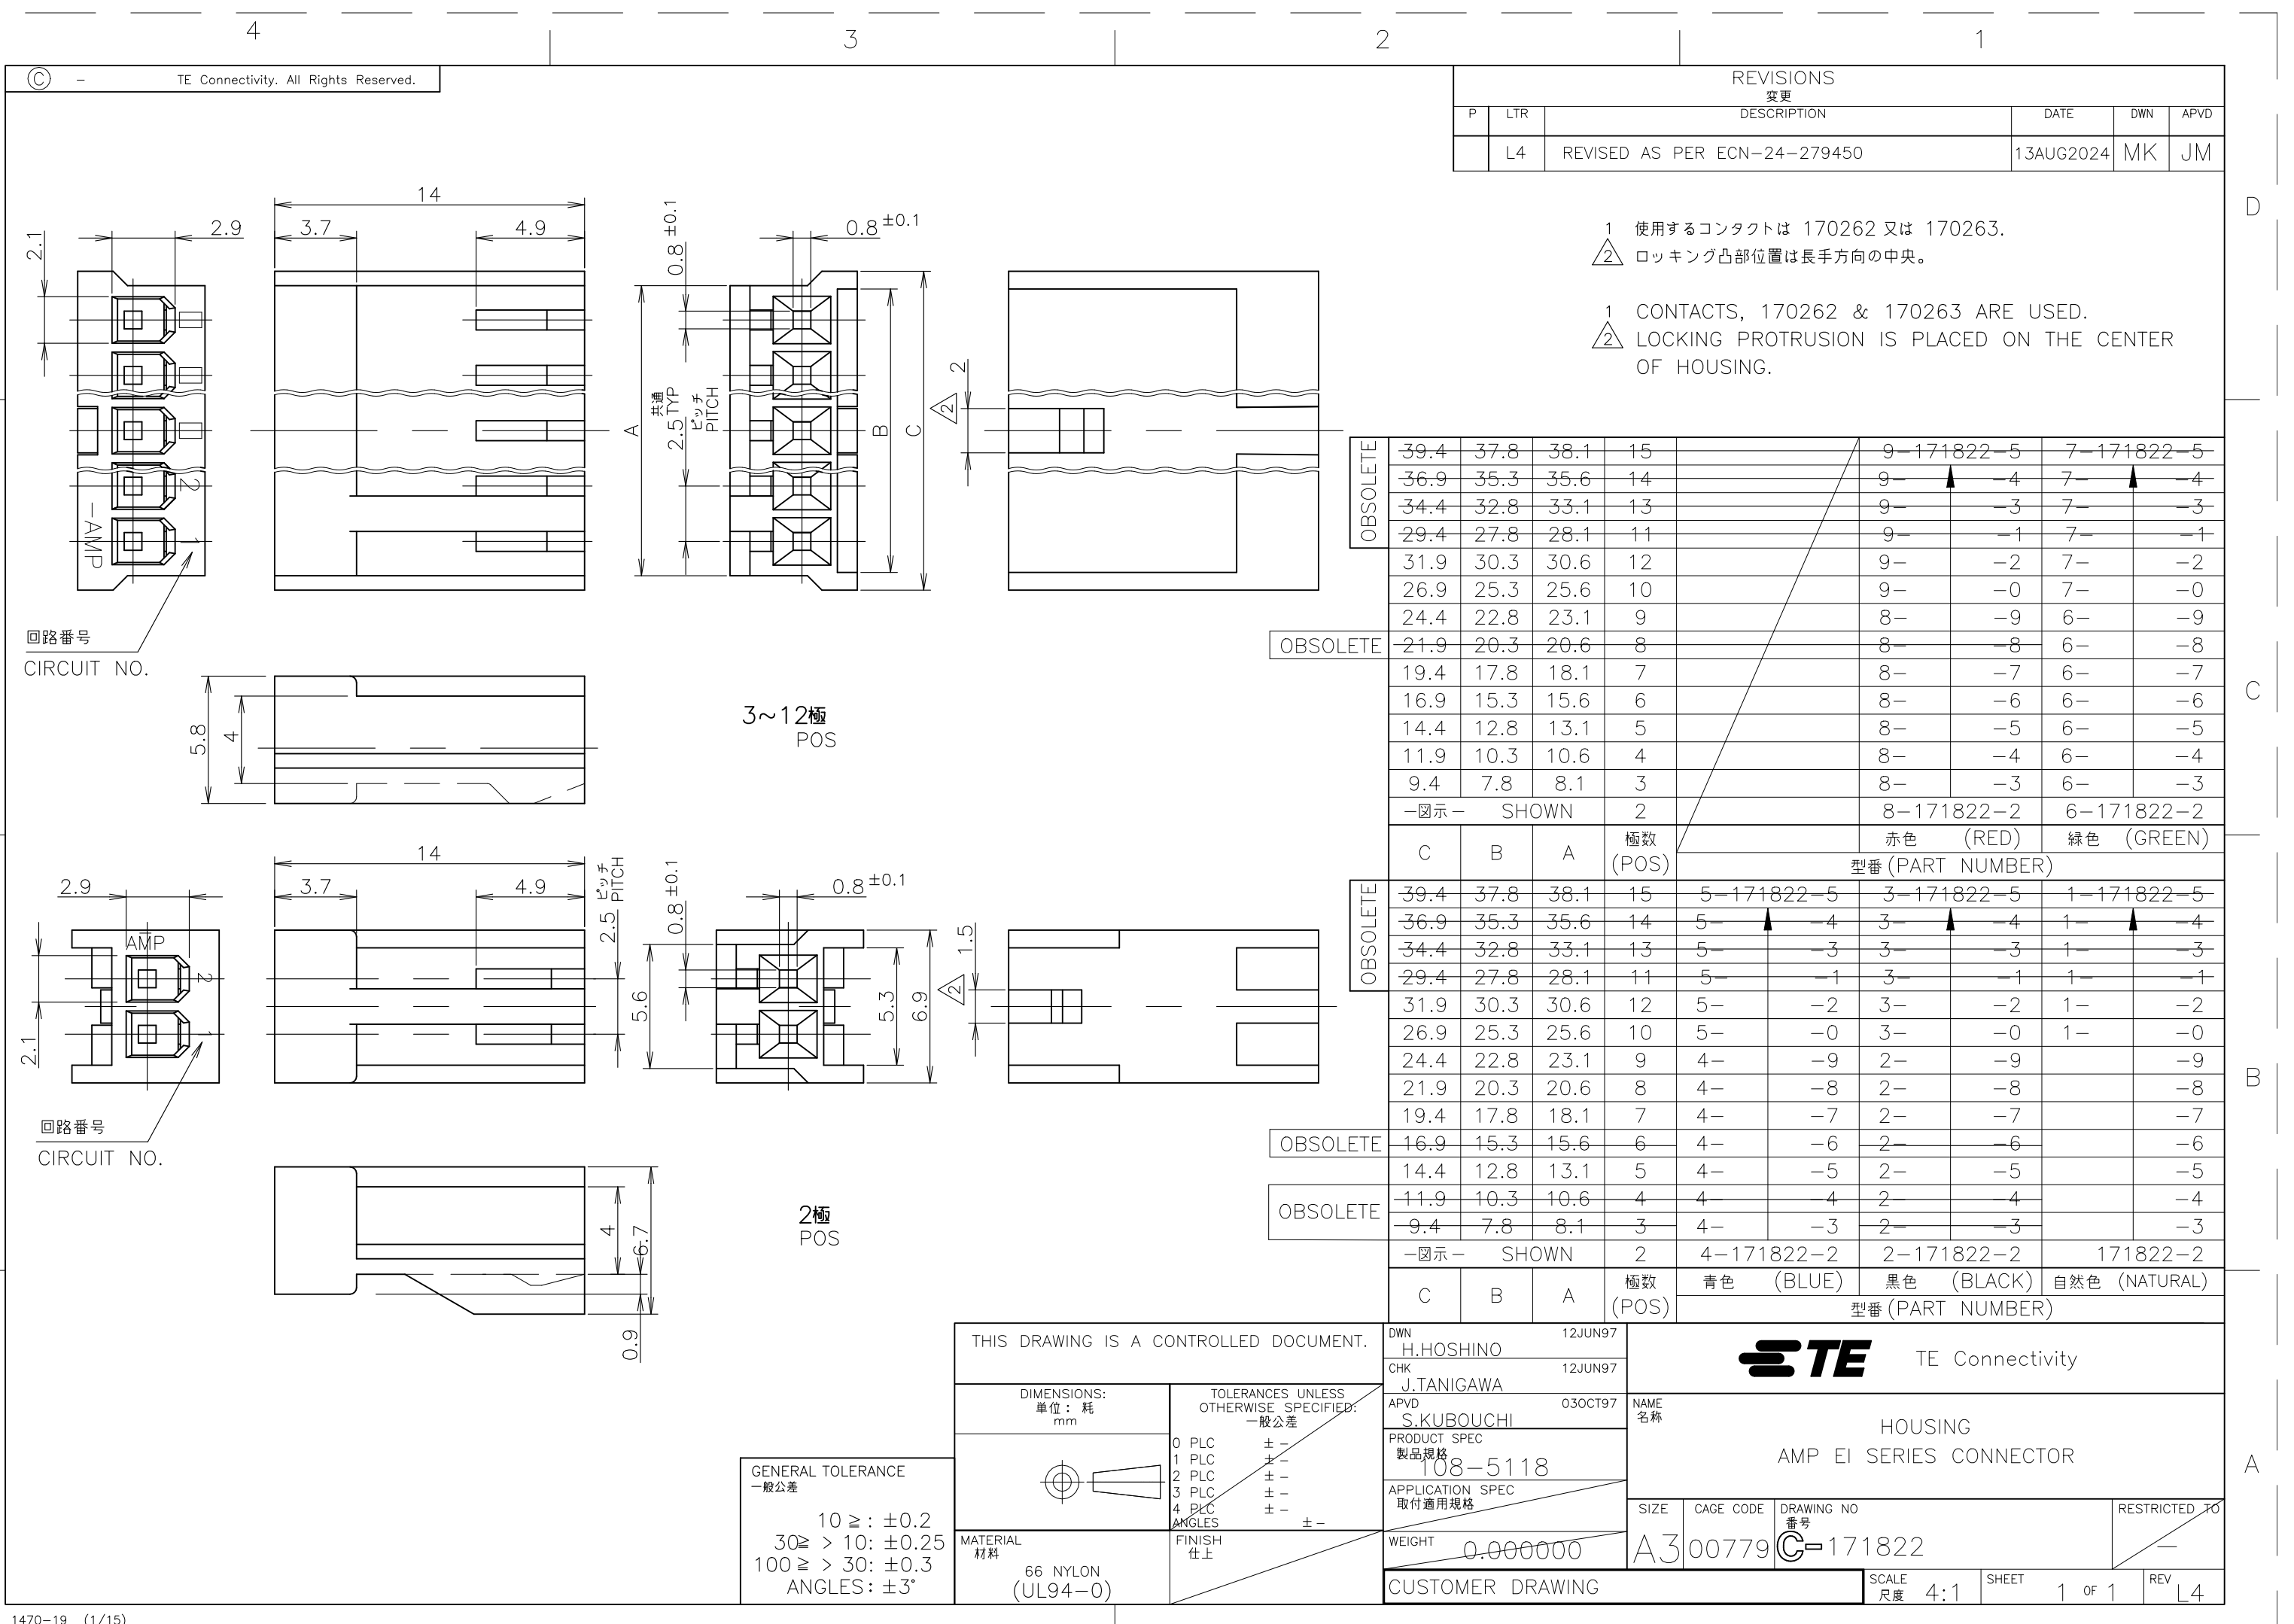

REVISIONS				
変更				
P	LTR	DESCRIPTION	DATE	DWN
	L4	REVISED AS PER ECN-24-279450	13AUG2024	MK
				JM

- 1 使用するコンタクトは 170262 又は 170263.
- 2 ロッキング凸部位置は長手方向の中央.
- 1 CONTACTS, 170262 & 170263 ARE USED.
- 2 LOCKING PROTRUSION IS PLACED ON THE CENTER OF HOUSING.

OBSOLETE	39.4	37.8	38.1	15	9-171822-5	7-171822-5
	36.9	35.3	35.6	14	9-4	7-4
	34.4	32.8	33.1	13	9-3	7-3
	29.4	27.8	28.1	11	9-1	7-1
	31.9	30.3	30.6	12	9-2	7-2
	26.9	25.3	25.6	10	9-0	7-0
	24.4	22.8	23.1	9	8-9	6-9
	21.9	20.3	20.6	8	8-8	6-8
	19.4	17.8	18.1	7	8-7	6-7
	16.9	15.3	15.6	6	8-6	6-6
	14.4	12.8	13.1	5	8-5	6-5
	11.9	10.3	10.6	4	8-4	6-4
	9.4	7.8	8.1	3	8-3	6-3
	-図示- SHOWN			2	8-171822-2	6-171822-2
	C	B	A	極数 (POS)	赤色 (RED)	緑色 (GREEN)

OBSOLETE	39.4	37.8	38.1	15	5-171822-5	3-171822-5	1-171822-5
	36.9	35.3	35.6	14	5-4	3-4	1-4
	34.4	32.8	33.1	13	5-3	3-3	1-3
	29.4	27.8	28.1	11	5-1	3-1	1-1
	31.9	30.3	30.6	12	5-2	3-2	1-2
	26.9	25.3	25.6	10	5-0	3-0	1-0
	24.4	22.8	23.1	9	4-9	2-9	-9
	21.9	20.3	20.6	8	4-8	2-8	-8
	19.4	17.8	18.1	7	4-7	2-7	-7
	16.9	15.3	15.6	6	4-6	2-6	-6
	14.4	12.8	13.1	5	4-5	2-5	-5
	11.9	10.3	10.6	4	4-4	2-4	-4
	9.4	7.8	8.1	3	4-3	2-3	-3
	-図示- SHOWN			2	4-171822-2	2-171822-2	171822-2
	C	B	A	極数 (POS)	青色 (BLUE)	黒色 (BLACK)	自然色 (NATURAL)

GENERAL TOLERANCE
一般公差

10 ≥ : ±0.2
30 ≥ > 10: ±0.25
100 ≥ > 30: ±0.3
ANGLES: ±3°

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: 単位: 耗 mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差
	0 PLC ± -
	1 PLC ± -
	2 PLC ± -
	3 PLC ± -
	4 PLC ± -
MATERIAL 材料	FINISH 仕上
66 NYLON (UL94-0)	

DWN H.HOSHINO 12JUN97			HOUSING AMP EI SERIES CONNECTOR	
CHK J.TANIGAWA 12JUN97				
APVD S.KUBOUCHI 03OCT97	NAME 名称		RESTRICTED TO	
PRODUCT SPEC 製品規格 108-5118	SIZE		CAGE CODE	DRAWING NO 番号
APPLICATION SPEC 取付適用規格	A3		00779	C-171822
WEIGHT 0.000000	CUSTOMER DRAWING		SCALE 尺度 4:1	SHEET 1 OF 1
				REV L4