



REVISIONS					
変更					
P	LTR	DESCRIPTION		DATE	APVD
	E9	REVISED PER ECR-25-235879		27FEB2025	BN JS

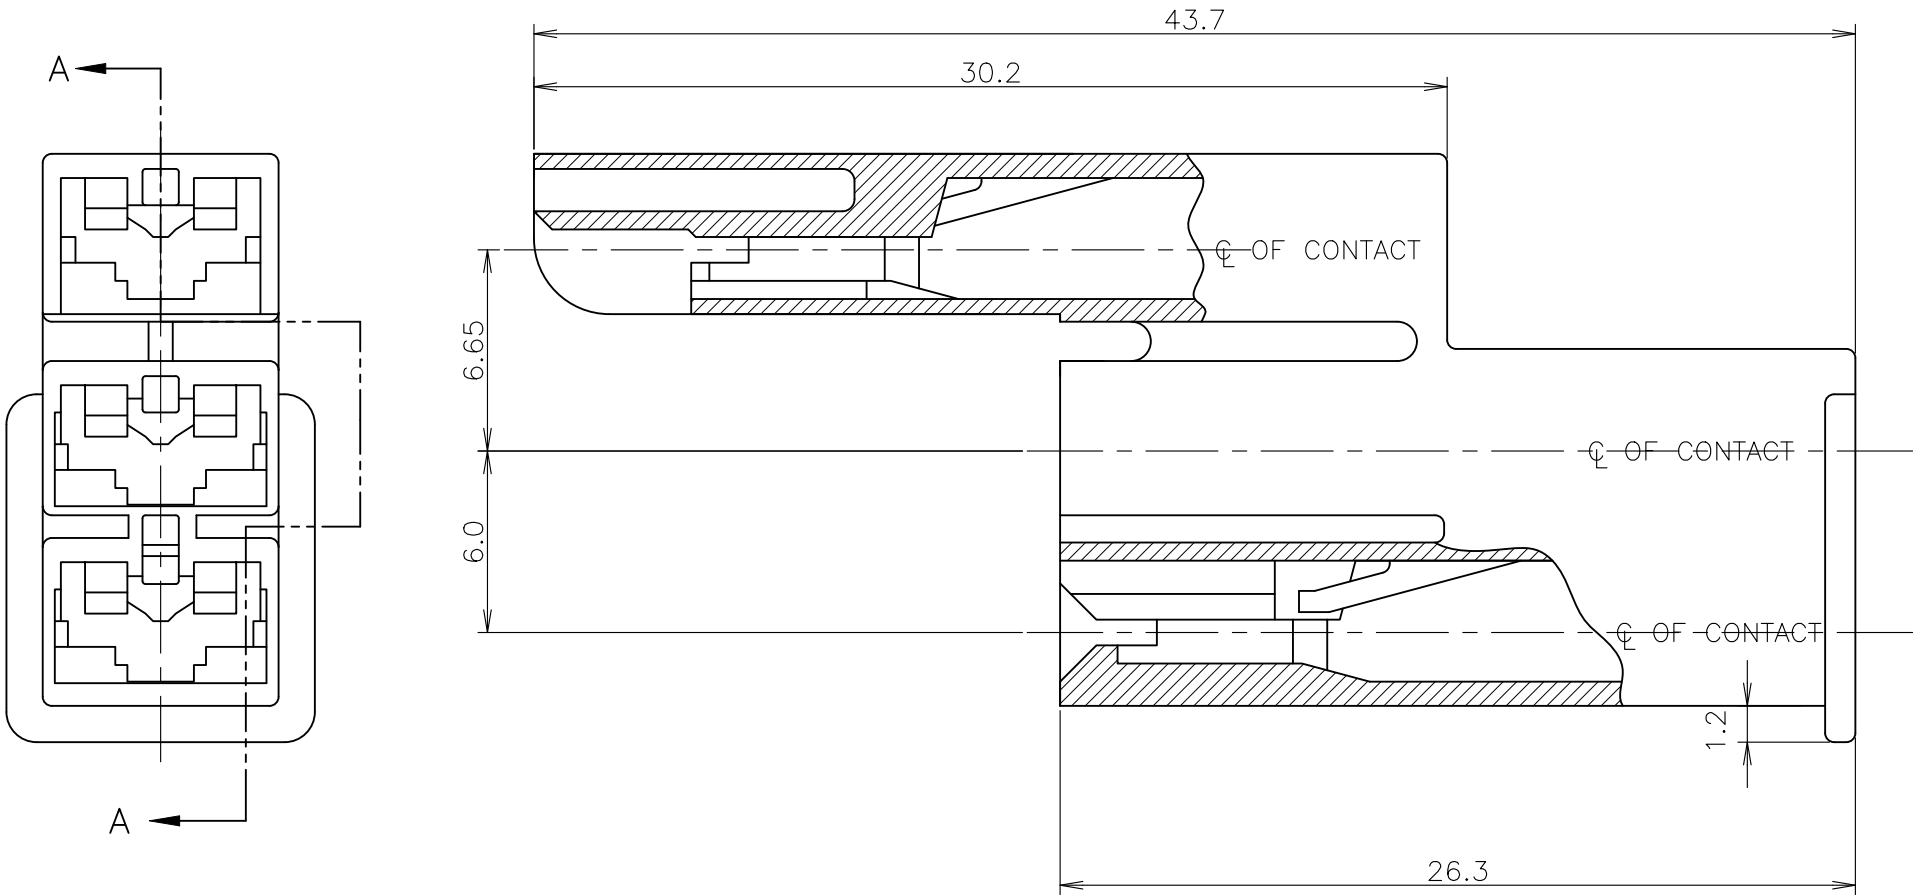

SECTION A-A

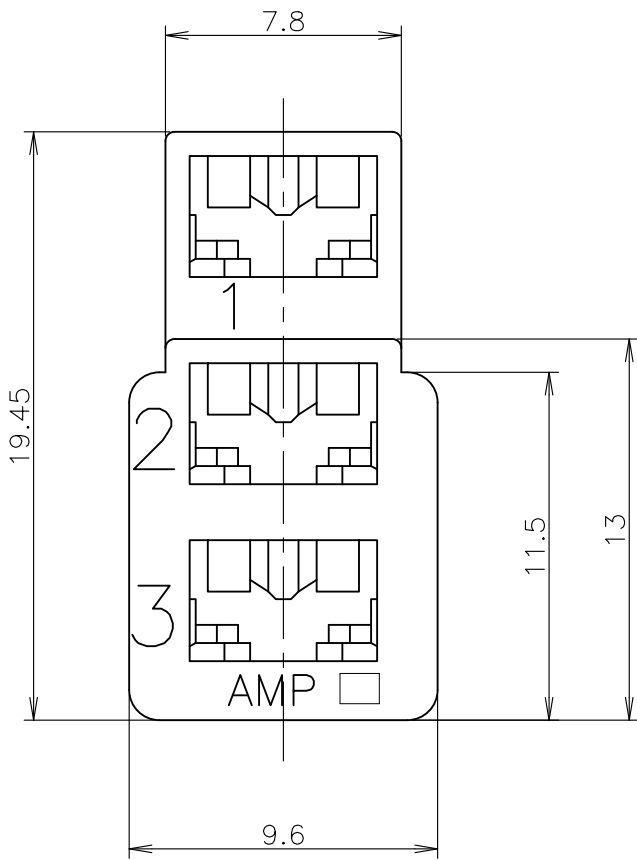

- 1 PRODUCT SPEC : 108-5126
- 2 APPLIED CONTACT P/N : 170324,170325,170326
- 3 THIS CONNECTOR APPLIED FOR 3 POS. MICRO SWITCH.
- 4 SEE CP79-25225 FOR APPLIED TAB.
- △

 MATERIAL : 6/6 NYLON (94V-2)
- △

 MATERIAL : 6/6 NYLON (94V-0)
- △

 OBSOLETE PARTS : OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
- △

 MATERIAL : PA66, UL94 V-0, GWIT 775°C

	2-172075-1	△ 8	NATURAL
△ OBSOLETE	1-172075-7	△ 6	(RED)
	1-172075-6	△ 6	(BLUE)
△ OBSOLETE	4-172075-5	△ 6	(GREEN)
△ OBSOLETE	1-172075-4	△ 6	(YELLOW)
	1-172075-1	△ 6	(NATURAL)
OBSOLETE	172075-7	△ 5	(RED)
	172075-6	△ 5	(BLUE)
OBSOLETE	172075-5	△ 5	(GREEN)
	172075-4	△ 5	(YELLOW)
	172075-1	△ 5	(NATURAL)
	PART NUMBER		(COLOR)

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN H.YAMADA	12DEC1979	TE TE Connectivity		
		CHK A.TOMITA	12DEC1979			
		APVD Y.SATO	08APR1980	NAME 名称		
		PRODUCT SPEC 製品規格		187 SERIES 3 POS. POSITIVE LOCK MK-II HSG		
		APPLICATION SPEC 取付適用規格		187シリーズ 3極ポジティブロック マークII ハウジング		
		WEIGHT		SIZE A3	CAGE CODE 00779	DRAWING NO 番号 C-172075
CUSTOMER DRAWING				SCALE 尺度	4:1	SHEET 1 OF 1
				REV E9		