

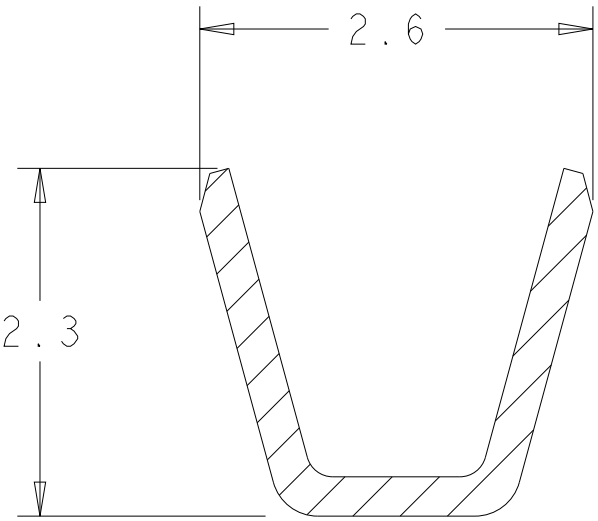
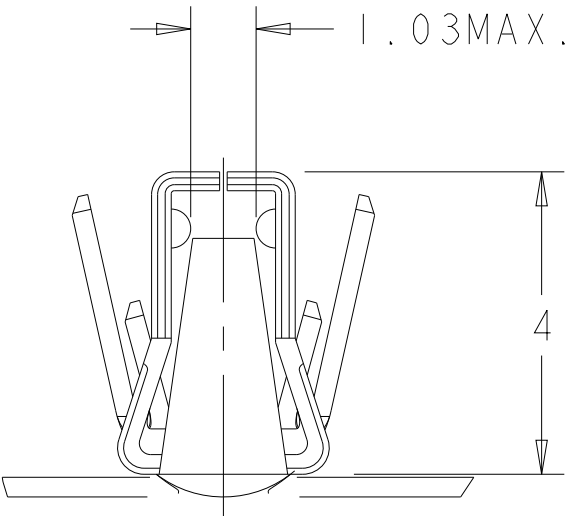
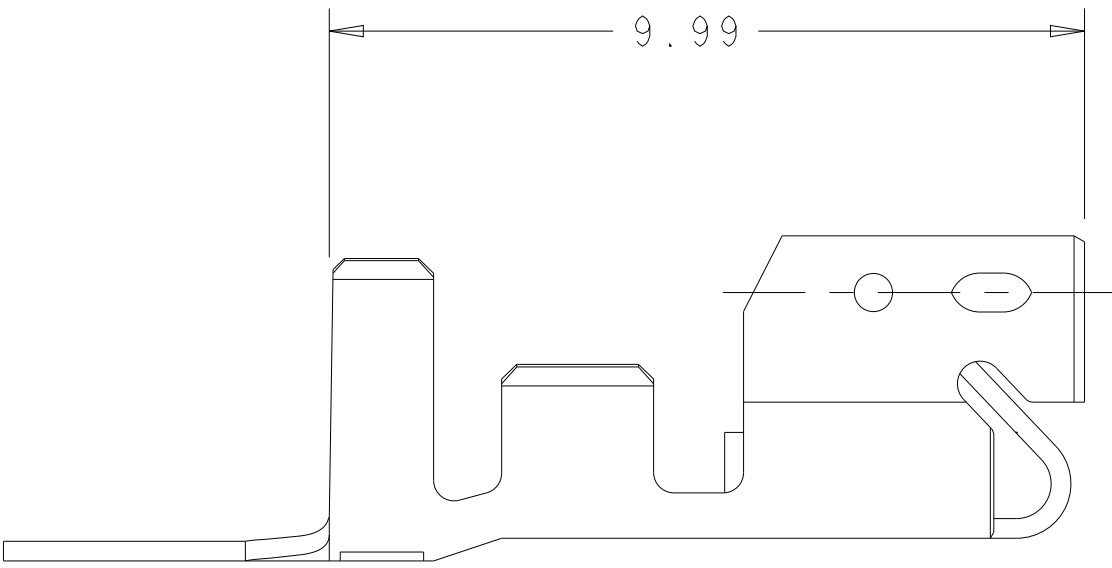
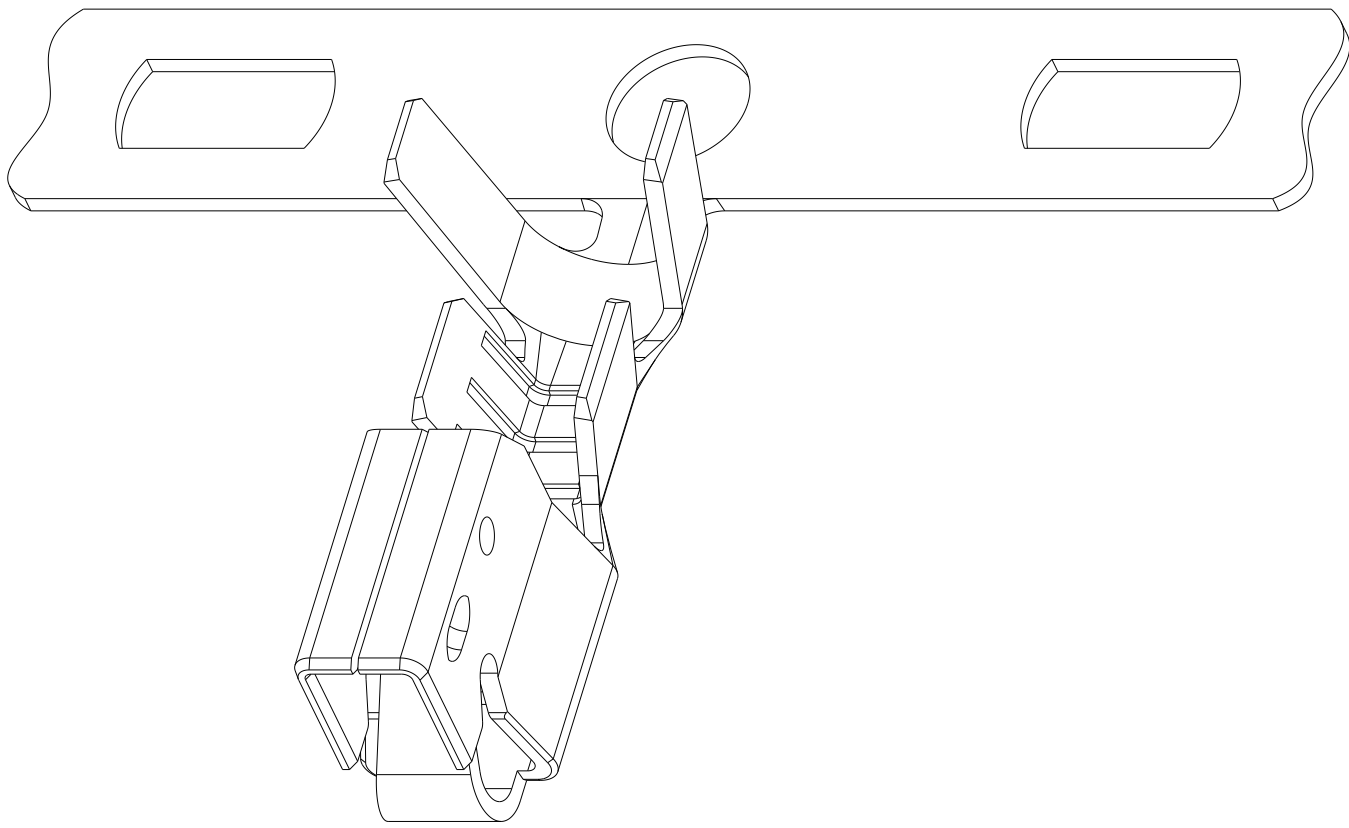
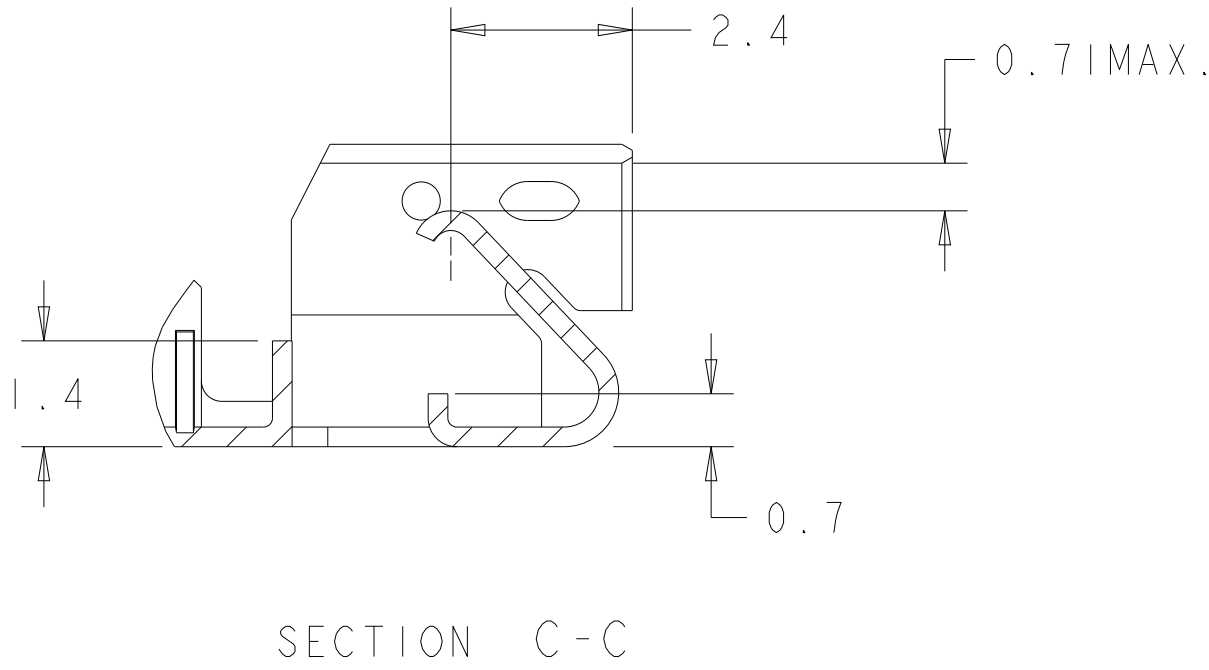


LOC		DIST		REVISIONS					
CM	00	P	LYR	DESCRIPTION	DATE	DWN	APVD		
		D3		REVISED PER ECR-20-100273	13AUG2020	WH	DZ		
		D4		REVISED PER ECR-23-165122	24FEB2023	NH	LC		
		D5		REVISED PER ECR-24-229462	13MAR2025	NH	JH		


1. FINISH: 0.8μM PRE-TIN OVER 0.5μM MIN COPPER.
2. WIRE RANGE: 22-18 AWG [0.30-0.89mm²].
- △3 CONTACTS COATED WITH TE ANTI-FRETTING LUBRICANT.
- 4 WIRE INSULATION RANGE: 1.7-2.9MM DIA.

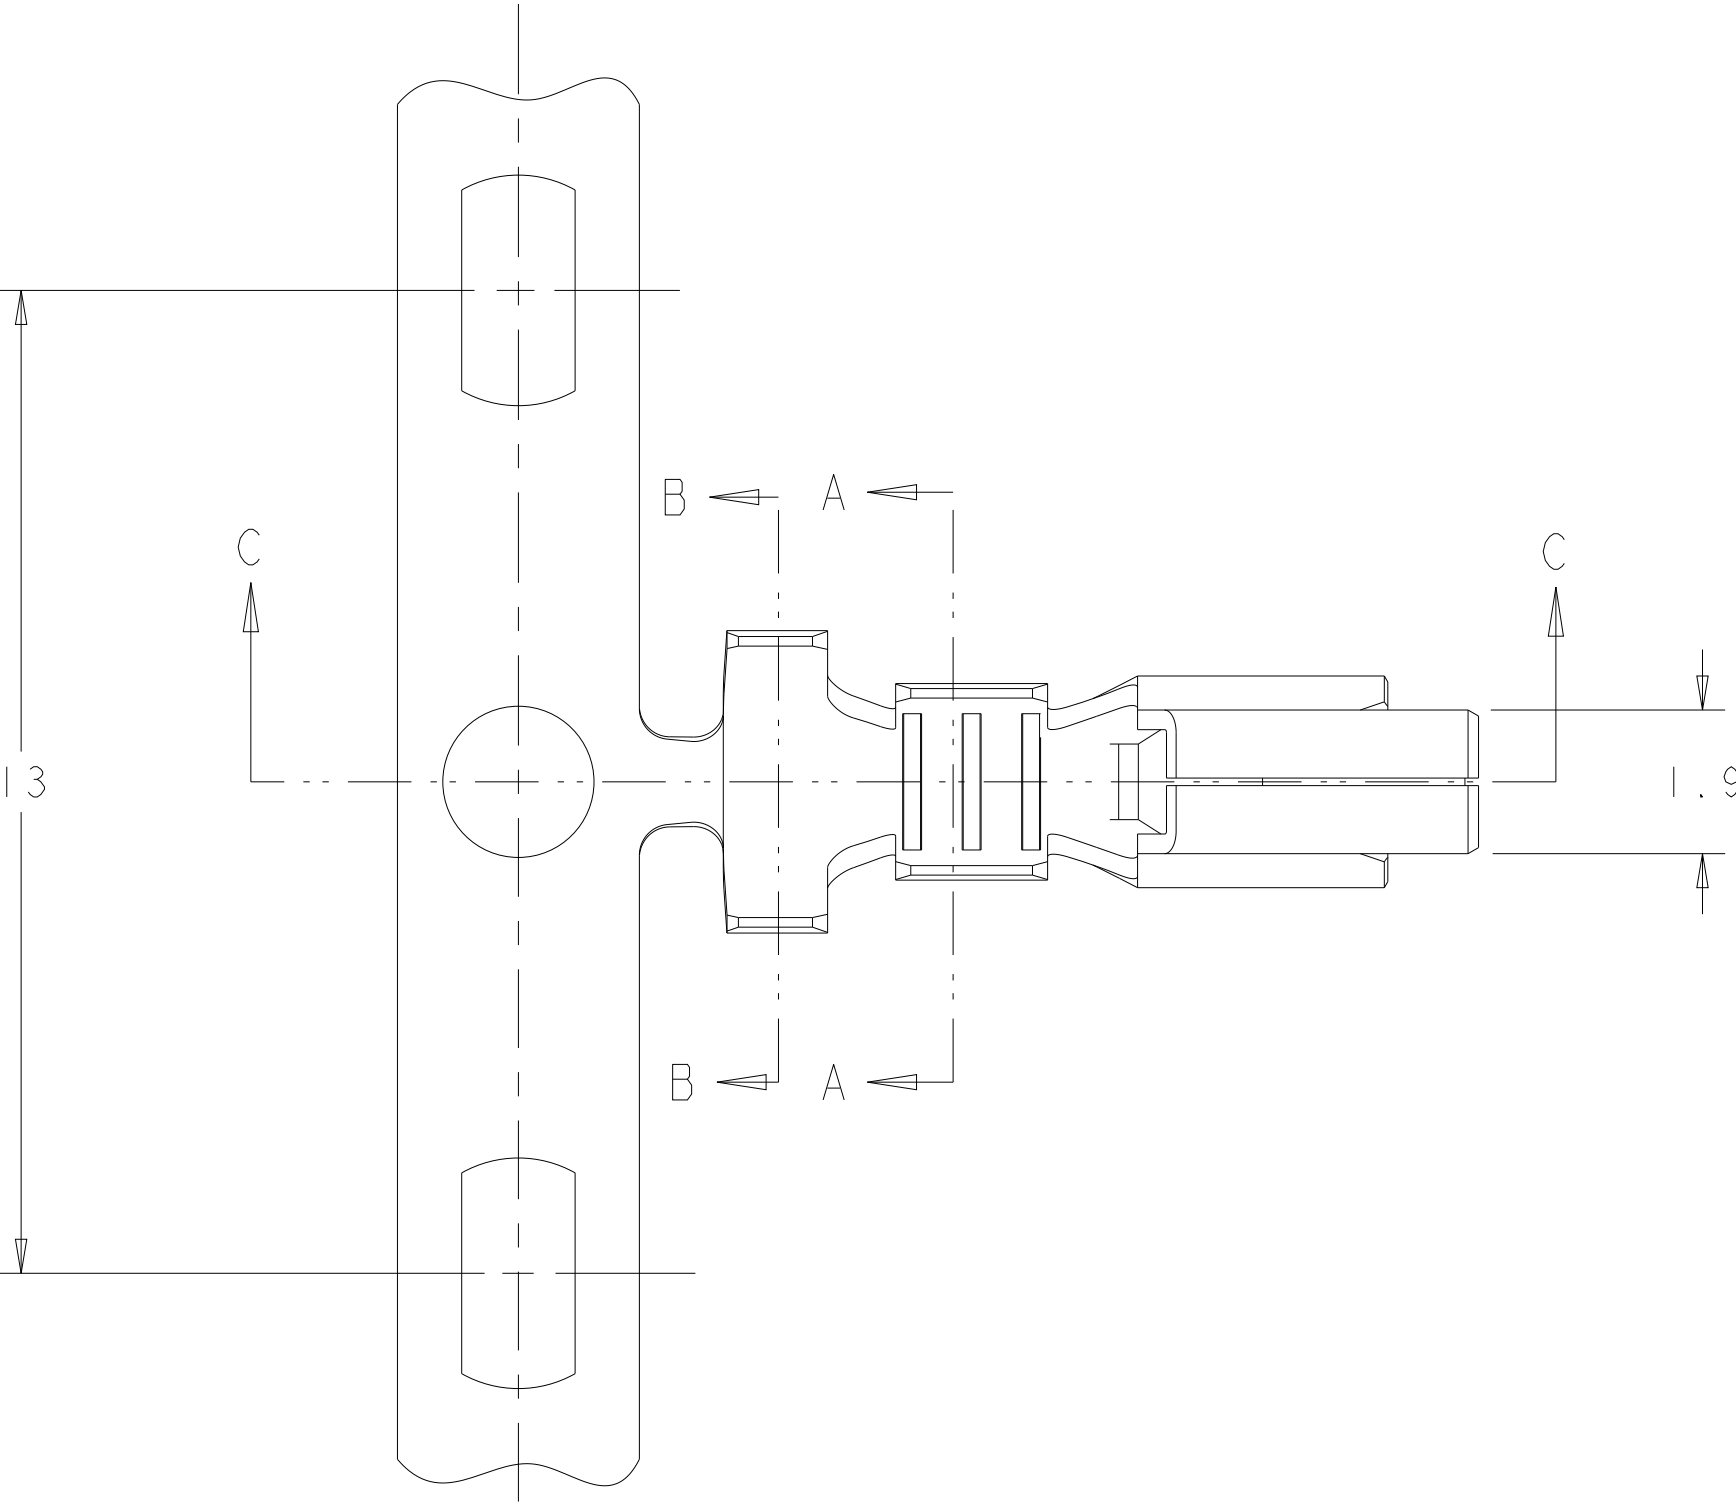

SECTION A-A
SCALE 20:1

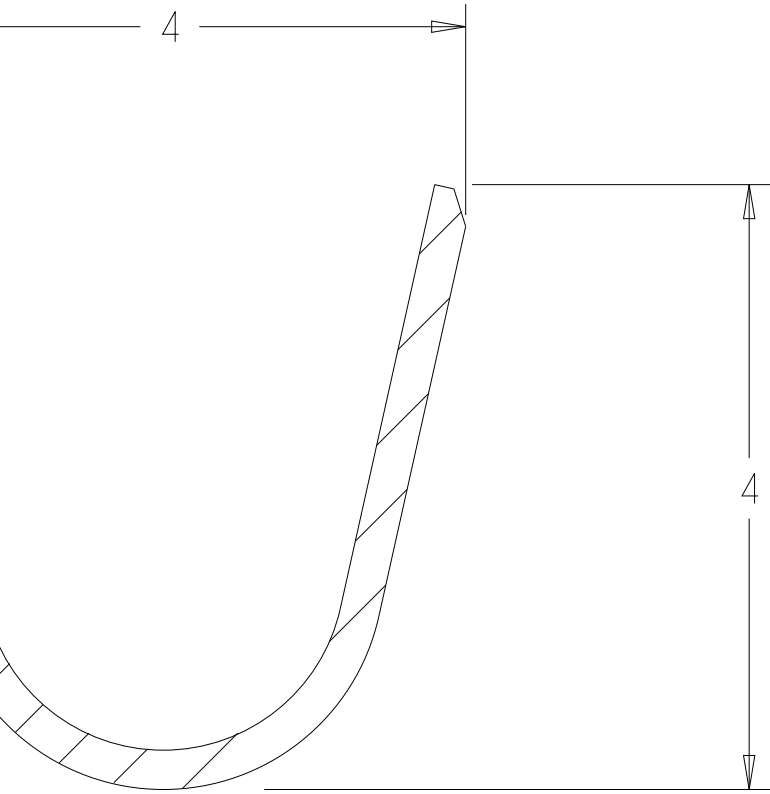

SECTION B-B
SCALE 20:1

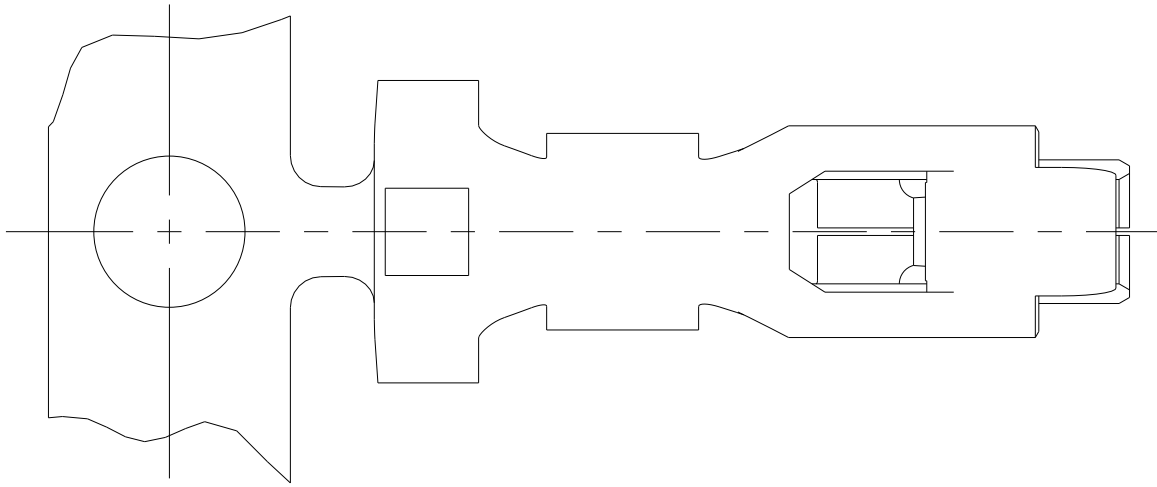

△3	PHOS BRONZE	1744144-1
LUBRICANT	MATERIAL	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 05APR2005		
		CHK J. ELLIS 05APR2005		
DIMENSIONS:		APVD J. ELLIS 05APR2005	NAME	
MM	0 PLC	±.2	PRODUCT SPEC	
	1 PLC	±.15	108-2297	
	2 PLC	±.1	APPLICATION SPEC	
	3 PLC	±.1	114-13265	
MATERIAL		SEE TABLE	WEIGHT	
		SEE TABLE	CUSTOMER DRAWING	
		SCALE	N/A	SHEET 1 OF 1
		REV	D5	