
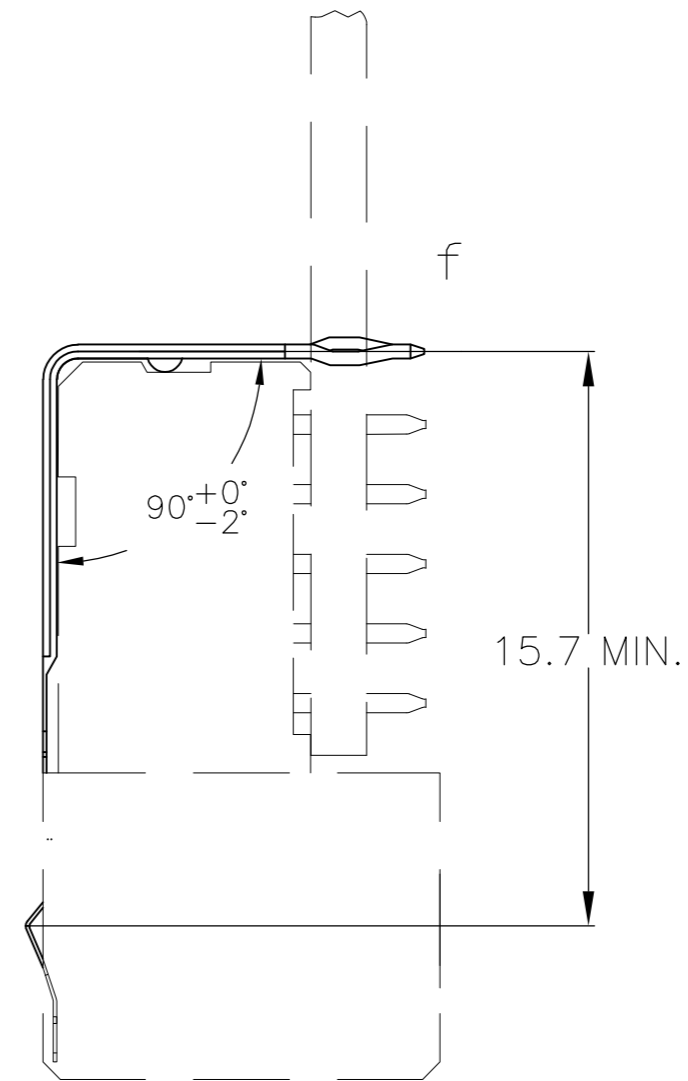


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.


LOC	DIST	REVISIONS					
J	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
		O1		REVISED ECR-06-004802	28FEB06	T.K	K.K
		A		ECR-12-009867	6NOV12	SY	AC

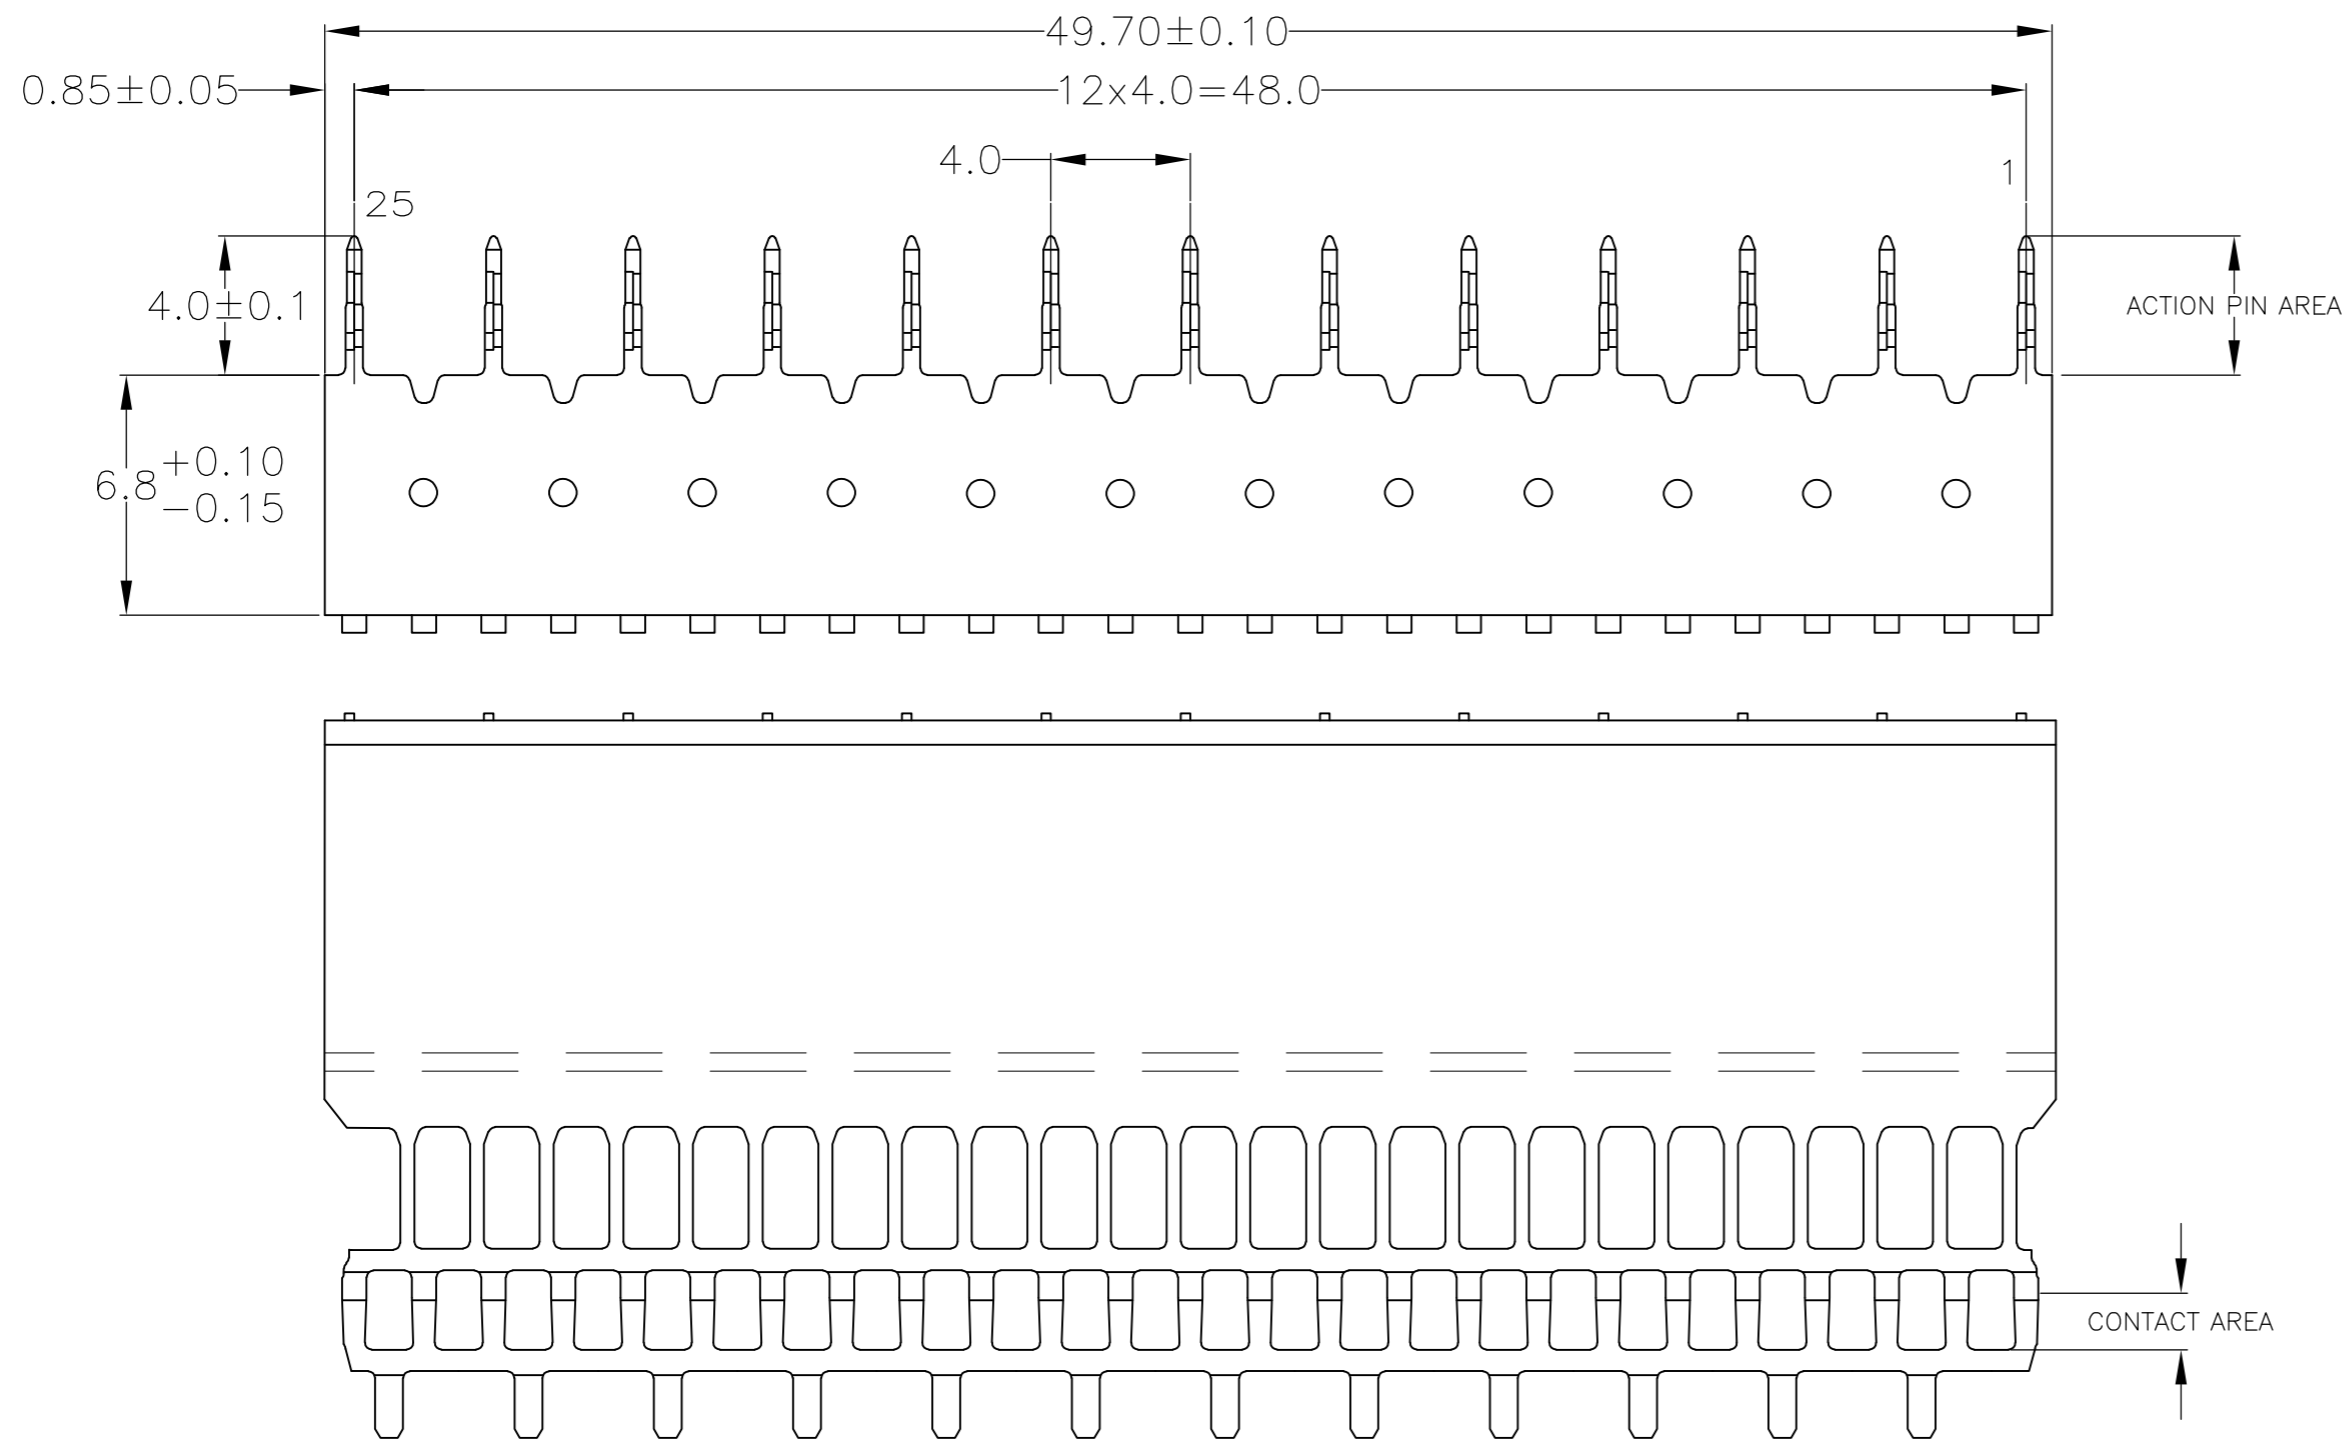

△ PLATING:  
 CONTACT AREA: 0,76 μm Au MIN. OVER 1,27 μm Ni MIN.  
 ACTION PIN : 0,5 μm SnPb MIN. (NO CONVERSION TO LEADFREE)  
 REMAINDER : Ni

△ MATERIAL; PHOSPHORBRONZE.  
 △ ROW "f" 13 PLATED THROUGH HOLES FOR UPPERSHIELD  
 △ HOLE PATTERN FOR FEMALE CONNECTOR TYPE B-25 COLUMNS  
 125 PLATED-THROUGH HOLES AT 2x2mm SQUARE GRID

△ ROW "f" 12 PLATED THROUGH HOLES FOR LOWERSHIELD  
 △ PLATING:  
 CONTACT AREA: 0,76 μm Au MIN. OVER 1,27 μm Ni MIN.  
 ACTION PIN : 0,5 μm Sn MIN.  
 REMAINDER : Ni

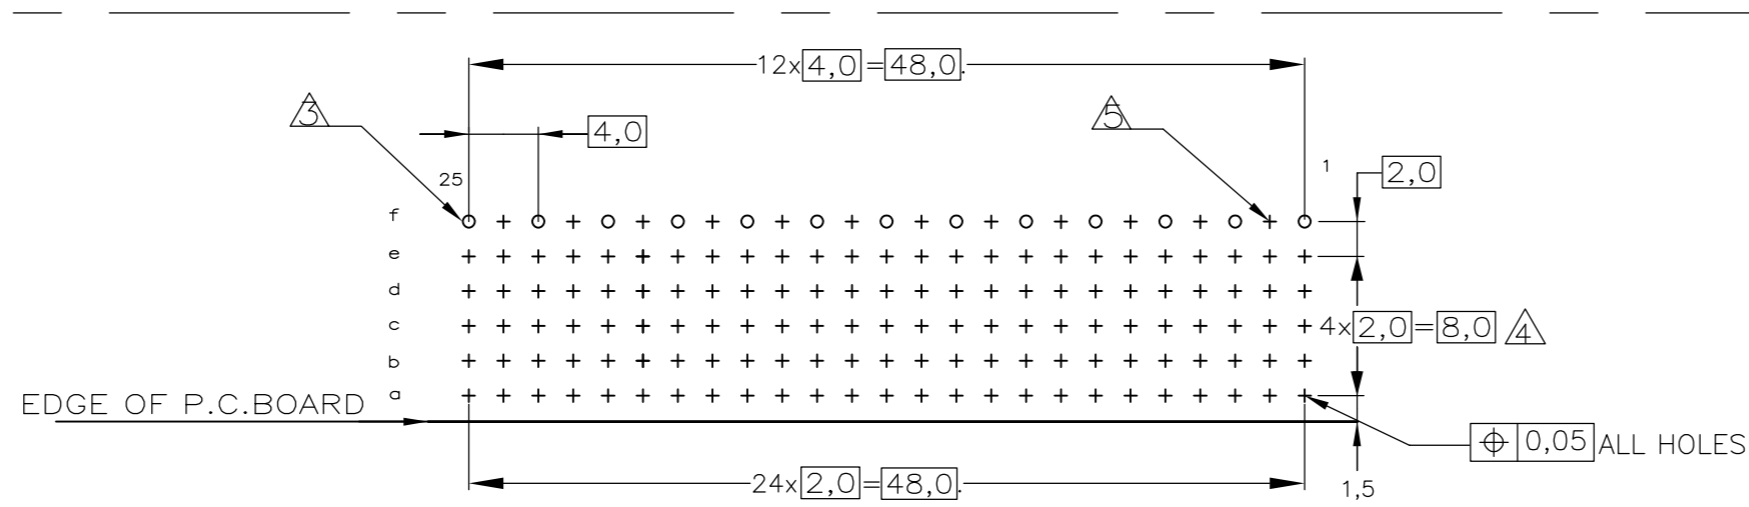

P.C.B. HOLE DIM. ACTION PIN  
 FIN. HOLE : 0,55 TO 0,65 mm  
 OTHER REQUIREMENTS: SEE APPLICATION SPECIFICATION 114-19029

COMPONENT SIDE AS SHOWN  
 RECOMMENDED PCB-HOLE LAY-OUT

DISOLETE	△	△	1746985-2
	△	△	1746985-1
	FINISH	MATERIAL	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	T.KATANO	31MAY04		TE Connectivity		
DIMENSIONS: 单位: 毫米 mm		CHK	T.KIMURA	31MAY04		Z-PACK 2mm HM		
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差 ±0.3		APVD	K.IKEGAMI	31MAY04		GROUND RETURN UPPERSHIELD		
0-PLC ±		PRODUCT SPEC	109-19082	TYPE B				
1-PLC ±		APPLICATION SPEC	114-19029	SIZE	A2	CAGE CODE	00779	
2-PLC ±		取付適用規格		DRAWING NO	C=1746985		RESTRICTED TO	
3-PLC ±				SCALE	5:1		SHEET	
4-PLC ±				WEIGHT	-		1 OF 1	
ANGLES ± 3°				CUSTOMER DRAWING			REV	
MATERIAL 材料		FINISH 仕上					A	