

注記:

1. 適用製品規格 : 108-5437

2. 適用コネクタ型番 :
179973-0 , 179974-0 , 179975-0




4. 取扱説明書 : 411-5691

NOTES:


1. PRODUCT SPEC; 108-5437

2. APPLICABLE CONTACT P/N
179973-0 , 179974-0 , 179975-0

3. INSTRUCTION SHEET; 411-5691

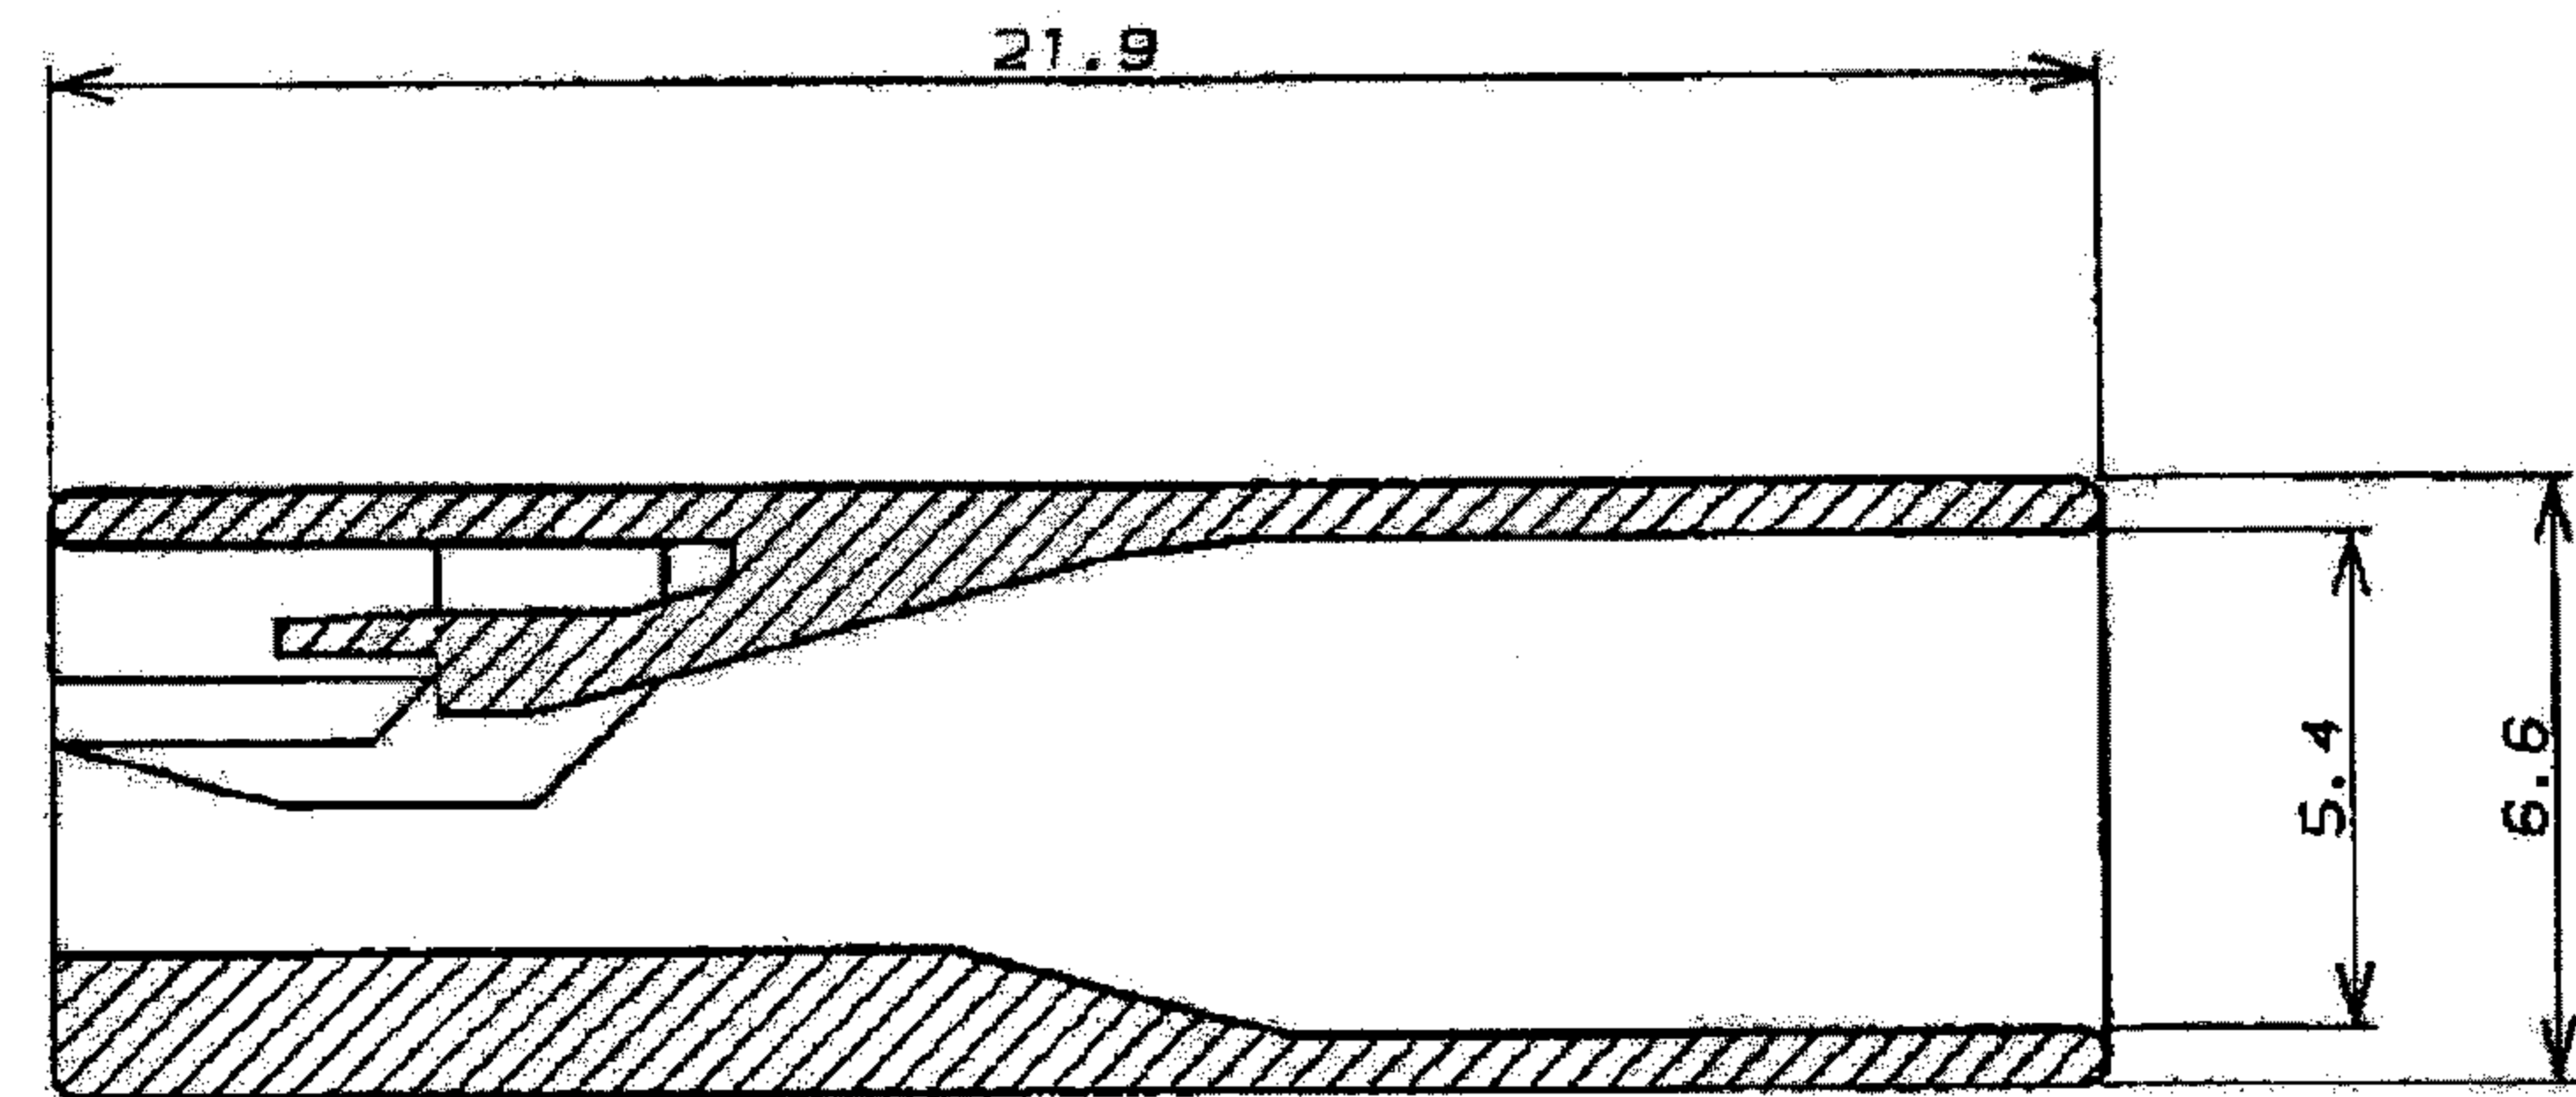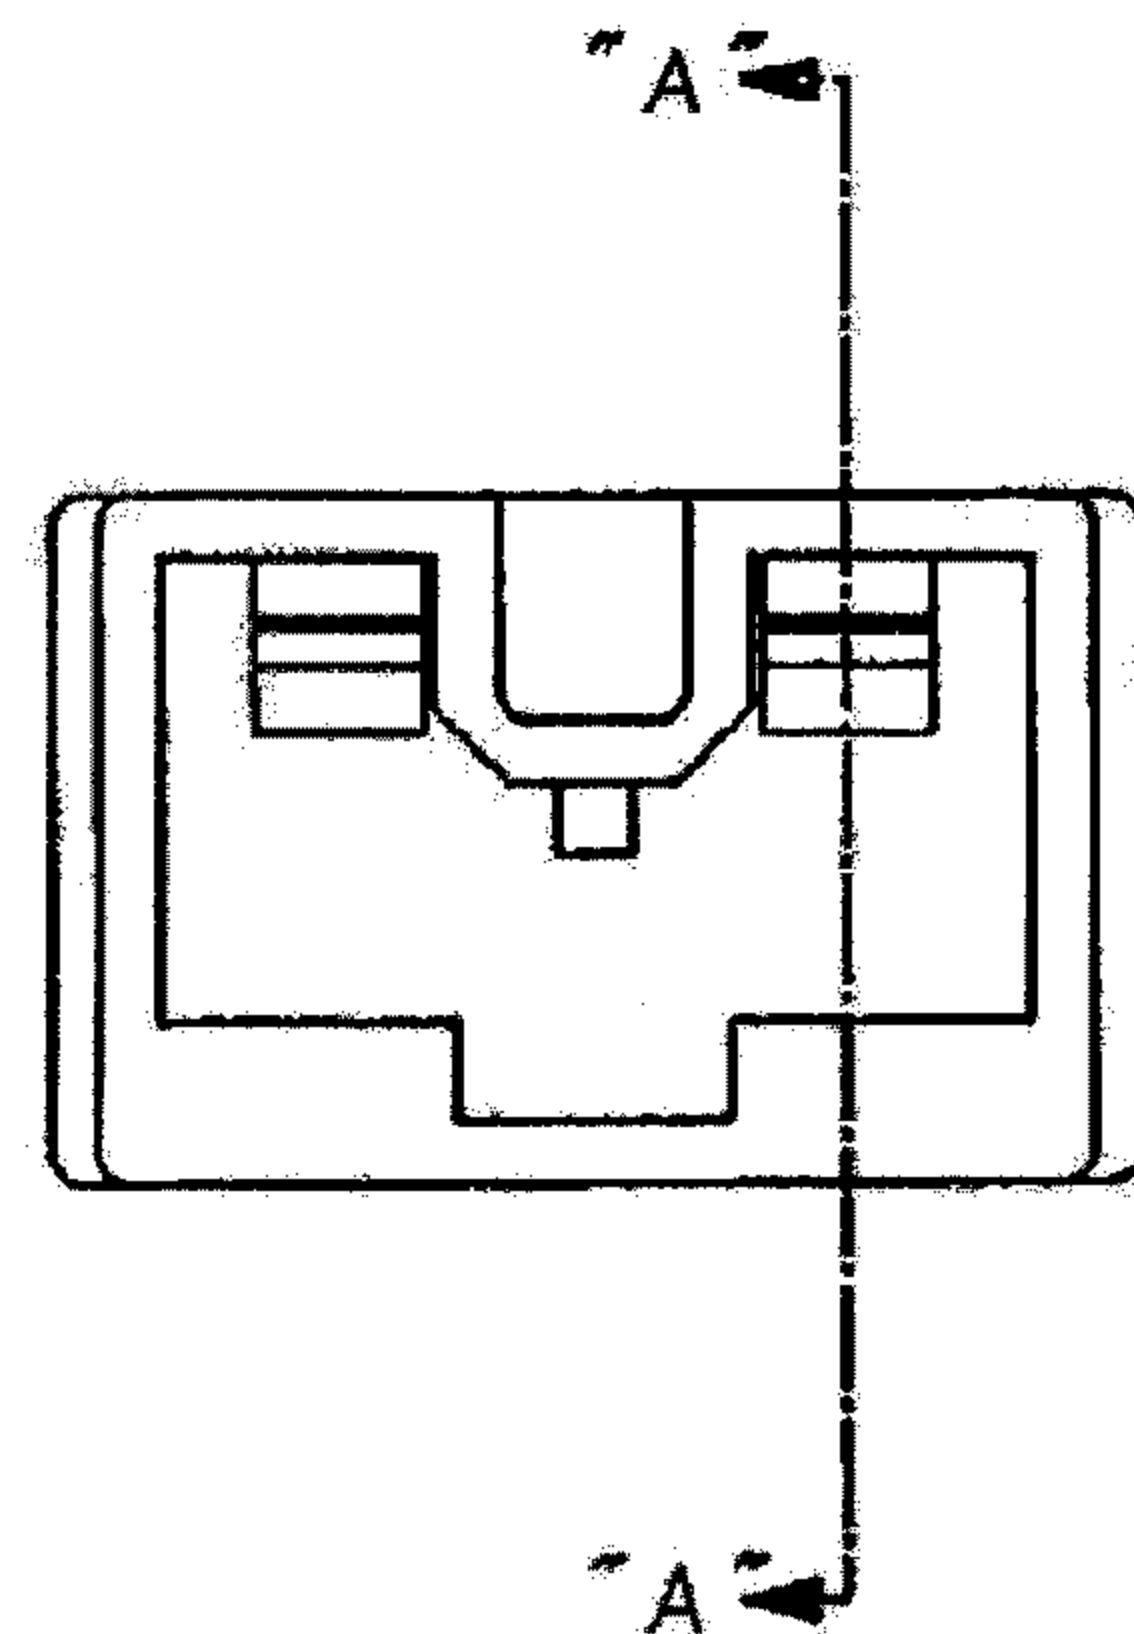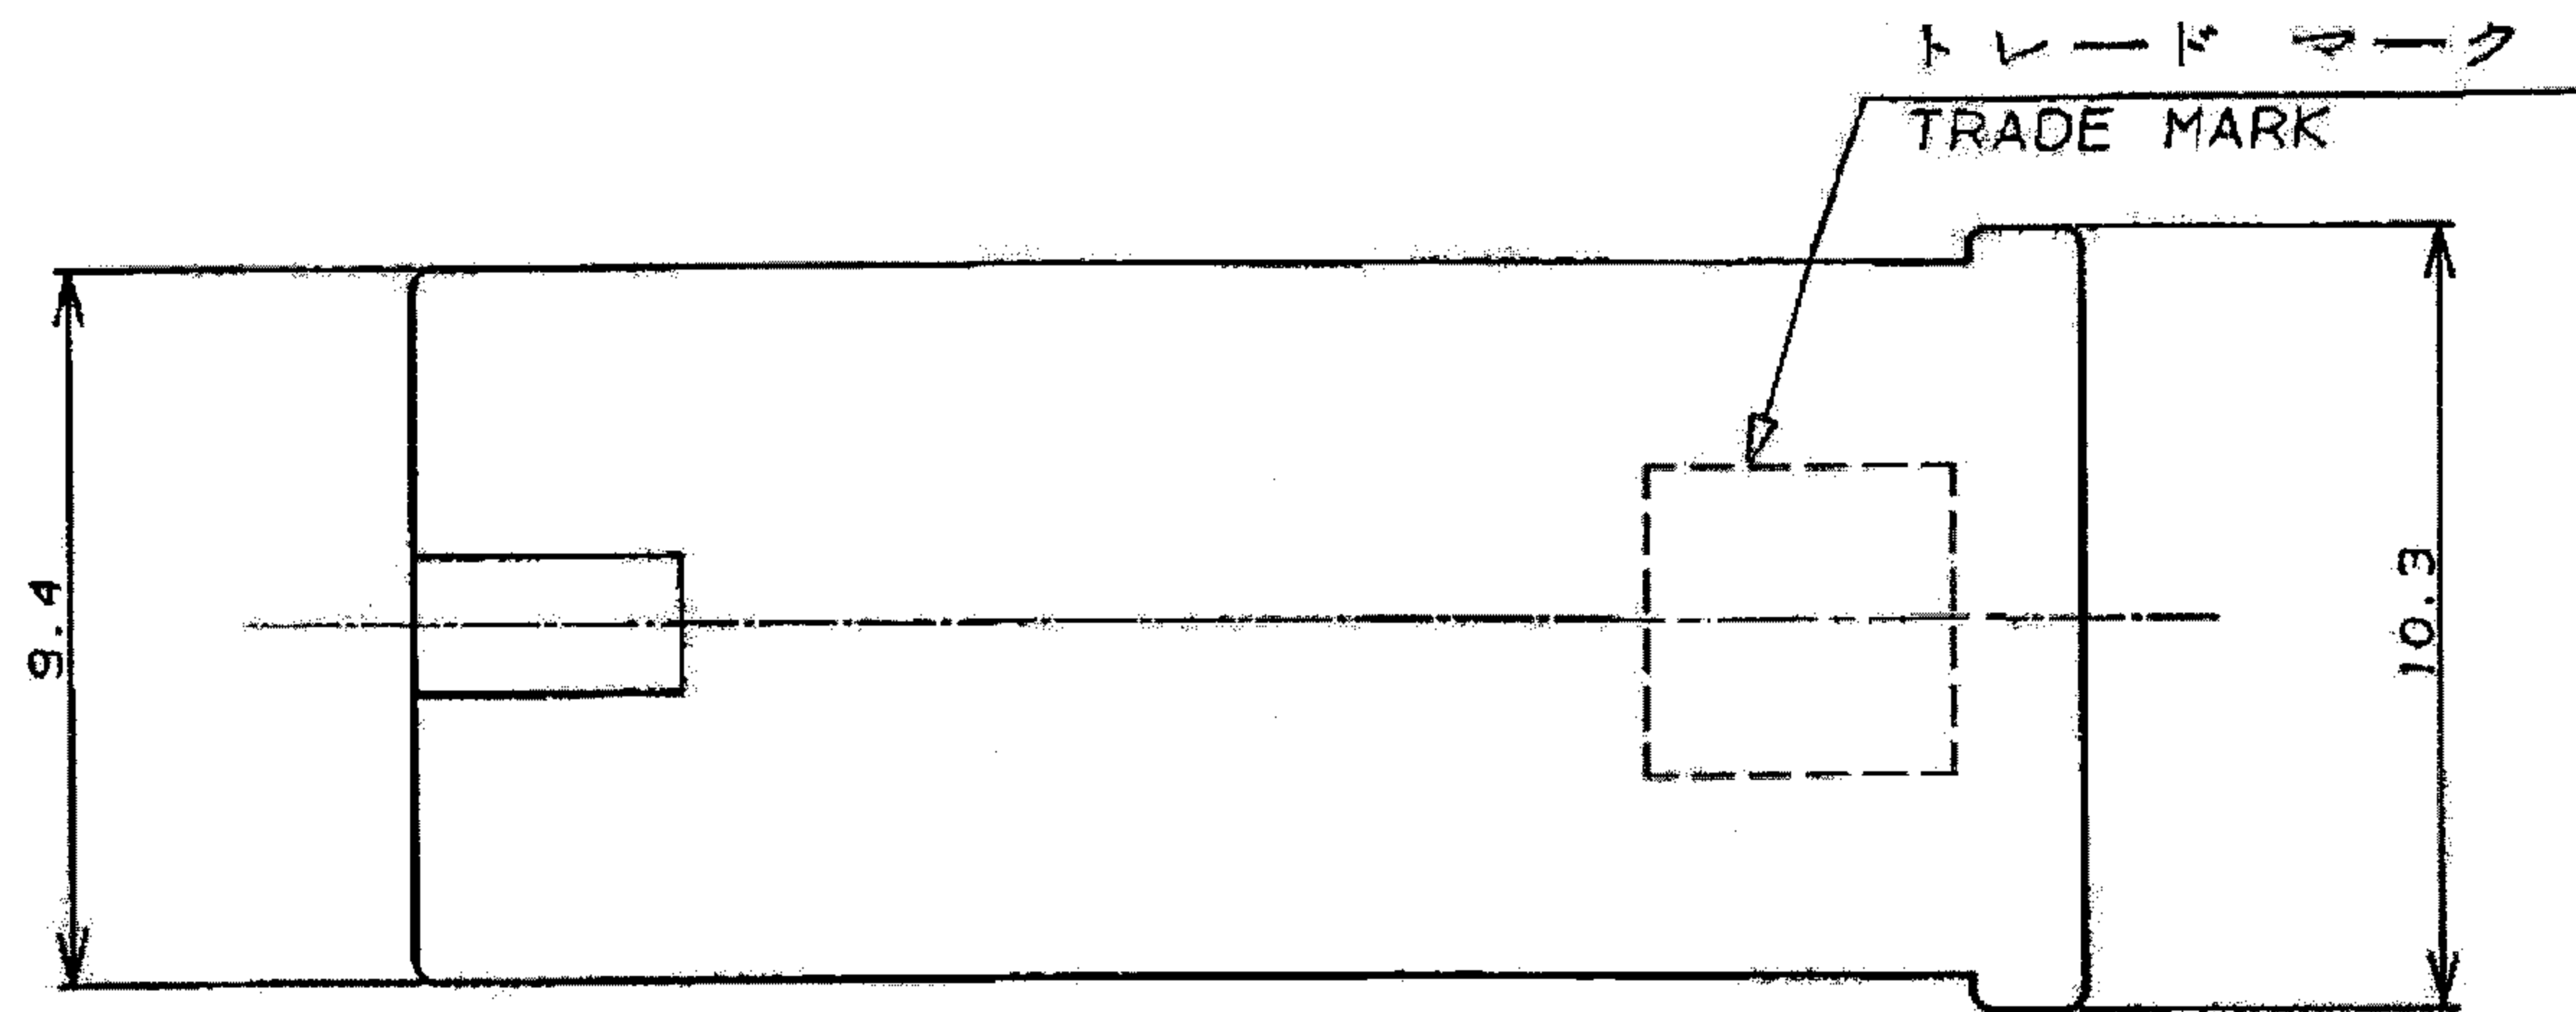

断面 "A" - "A"
SECT.

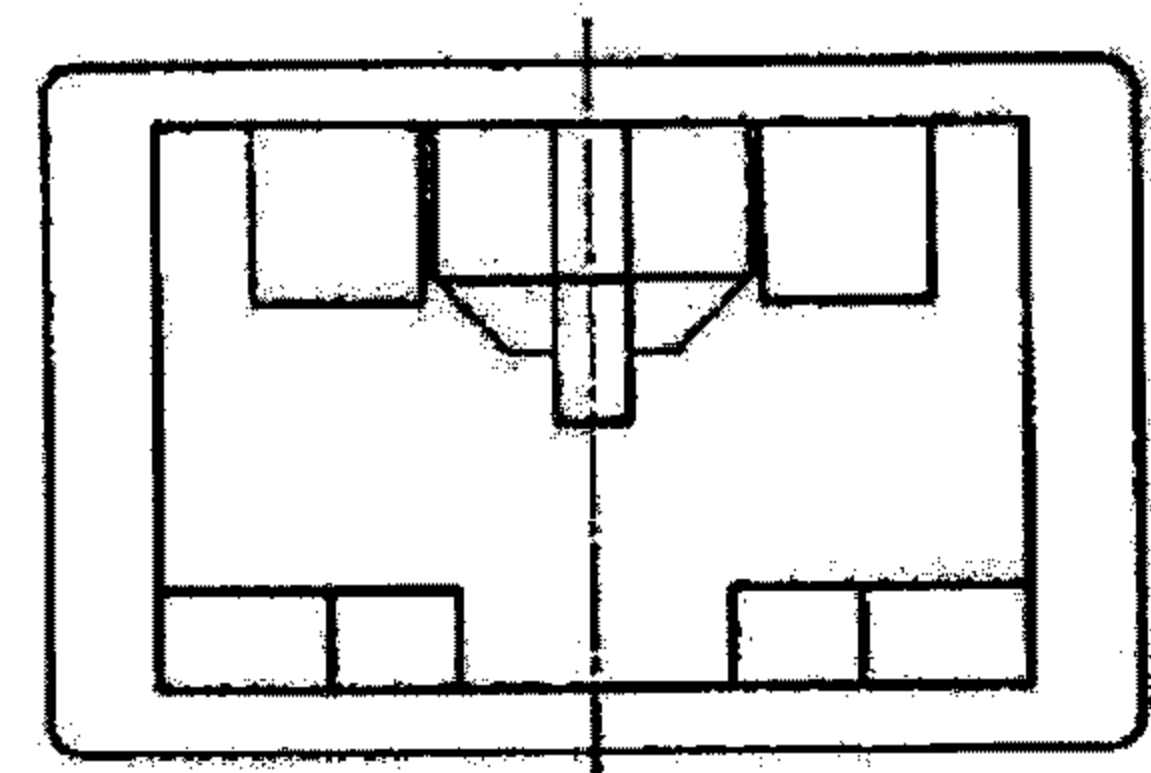

自然色	(NATURAL)	7-179970-1
黒	(BLACK)	179970-9
青	(BLUE)	179970-6
黄	(YELLOW)	179970-4
赤	(RED)	179970-2
自然色	(NATURAL)	179970-1
色調	(COLOR)	型番 (P/N)

C	REVISED ECR-24-208861	D.B	R.E	7MAR 2025	配線範囲 (WIRE RANGE)	絶縁外径 (INSULATION DIA.)	名称 (NAME)
B6	REVISED ECR-18-014304	S.T	T.D	19SEP 2018	mm ² (AWG -)	4.3 MAX mmφ	"250" SERIES POSITIVE LOCK-EX-II 1Pos REC HSG
B5	REVISED ECR-13-000284	L.L	F.M	08JAN 2013	材料 (MATERIAL)	仕上 (FINISH)	"250" シリーズ・ポジティブロック-EX-II 極リセ・ハウジング
B4	REVISED ECR-12-018436	L.L	F.M	23OCT 2012	6/6ナイロン 6/6NYLON		一般公差 (GENERAL TOLERANCE)
B3	REVISED	K.S	N.Y	15JUN 2012	DR. 30. JUN. '94	DE. 4. JUL. '94	10mm ±0.2
LTR	変更 (REVISION RECORD)	DR	CHK	DATE	CHK. 4. JUL. '94	APP. 4. JUL. '94	10mm ±0.25
					M. SHINDO	Y. KASHIWA	30mm ±0.3
							角 度 ±3°

TE Connectivity	
LDC	番号 (No.)
B	J
179970	
尺度 (SCALE)	REV.
5:1	C
SHEET	1 OF 1