



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	H6	REVISED PER ECO-17-014752	10OCT2017	JMS	AH
	U	REVISED PER ECO-21-002133	15APR2021	SM	AH
	U1	REV PER ECN-24-271487	20JUN2024	SMR	CL
	U2	REV PER ECN-25-302019	04FEB2025	SMR	CL

D

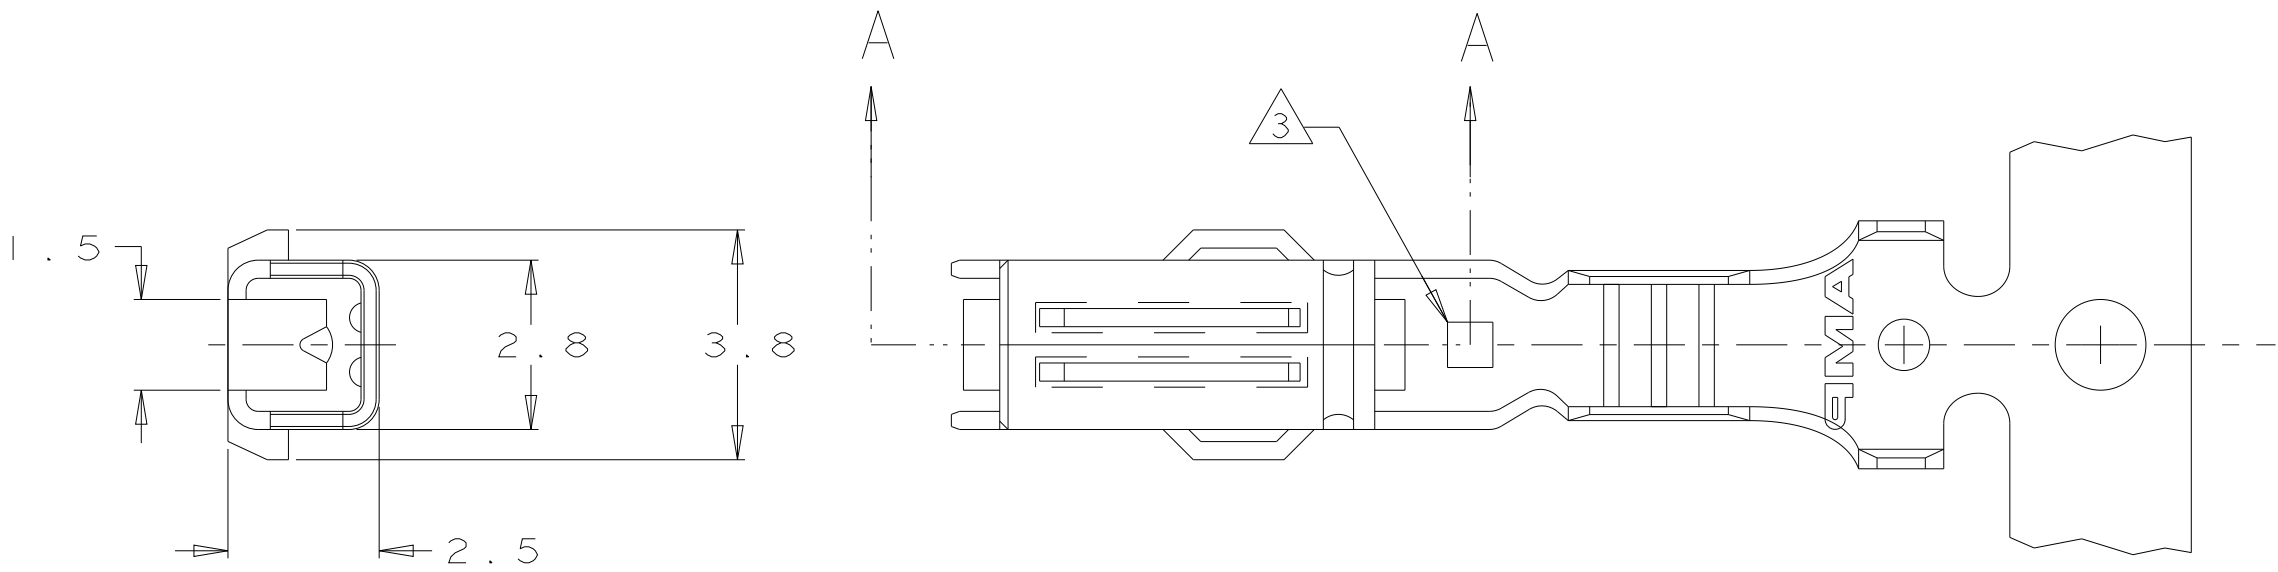


- 1 0.00076 MINIMUM THICK GOLD PLATE OVER 0.0013 MINIMUM NICKEL PLATE.
- 2 0.0008 MINIMUM THICK PRE-TIN.
- 3 0.75 x 0.75 DIE IDENTIFICATION MARK.
- 4 FOR GOLD PLATED PART ONLY - AT LEAST ONE "G" INDICATOR MUST BE VISIBLE IN THIS LOCATION ON EITHER SIDE INDICATING GOLD PLATED CONTACT.


C

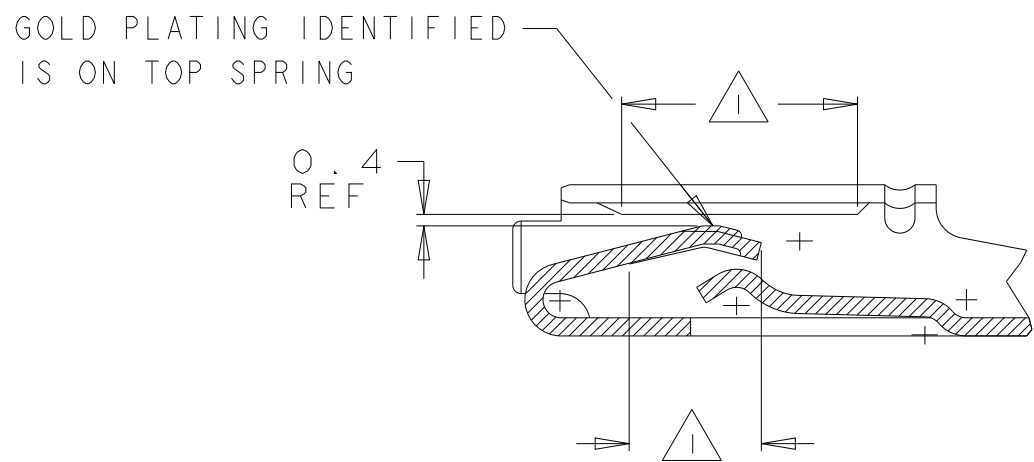


SECTION A-A

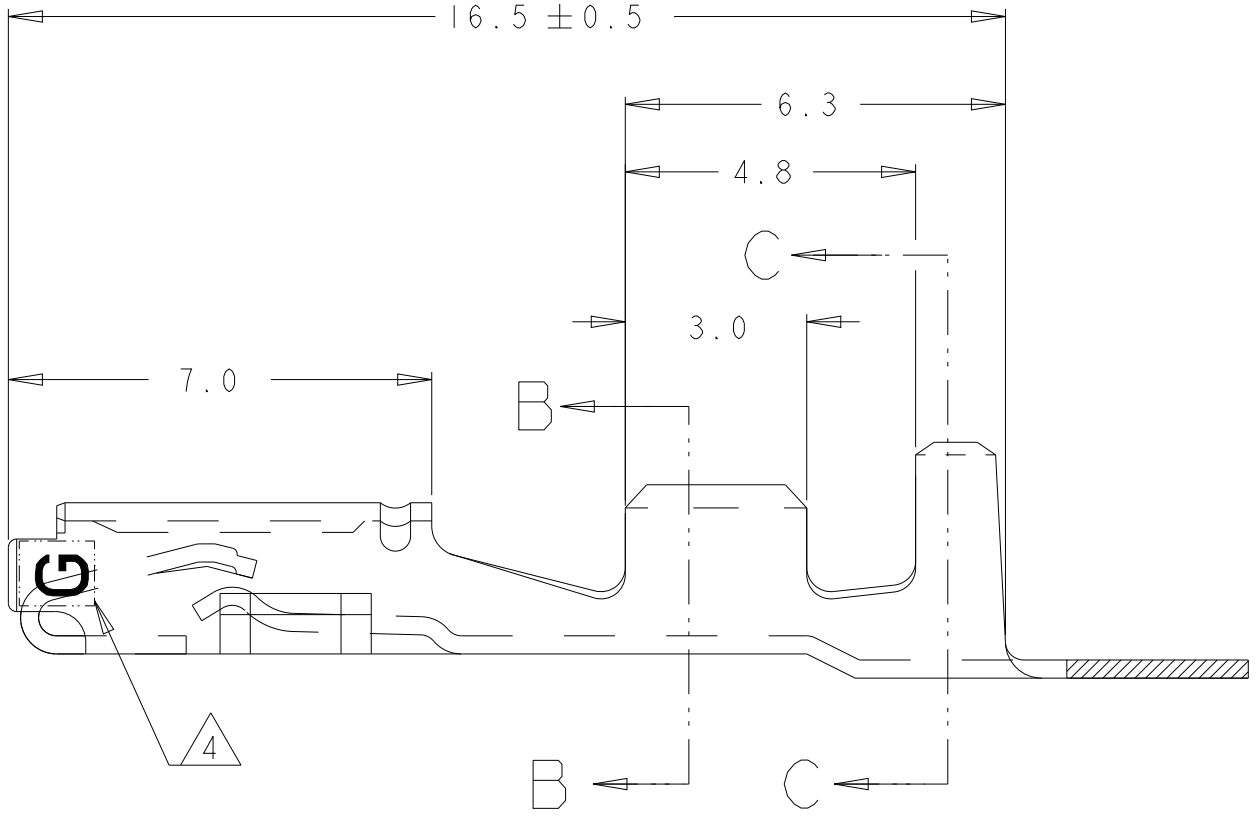

B

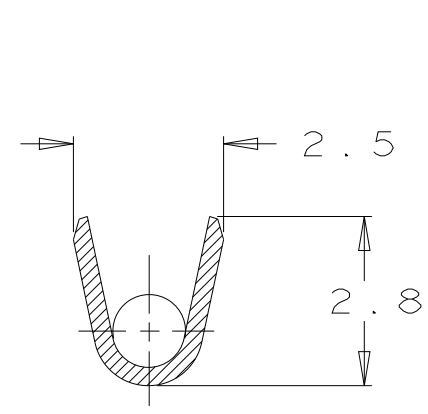

SECTION B-B

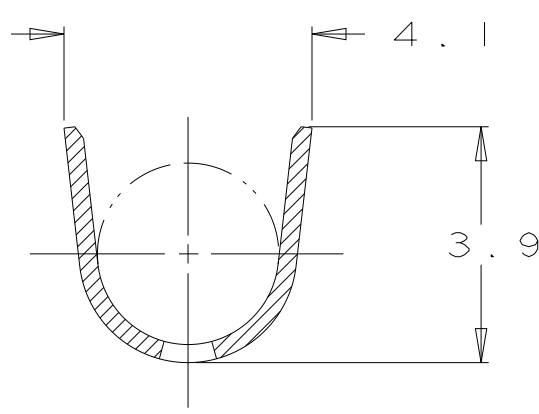

SECTION C-C

2	1.2-2.1 (SINGLE WIRE SEALING)	AVS 0.3 - 1.00mm ²	184095-2
1	1.2-2.1 (SINGLE WIRE SEALING)	AVS 0.3 - 1.00mm ²	184095-1
FINISH	INSULATION DIA	WIRE RANGE	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN KD LYLE 9/20/94	TE Connectivity			
DIMENSIONS: mm		CHK JP KUNKLE 9/23/94				
		APVD JP KUNKLE 10/21/94	NAME CONTACT, RECEPTACLE, .070 TYPE (SCAT VERSION)			
		PRODUCT SPEC -	-			
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APPLICATION SPEC -	SIZE A200779			
0 PLC ± 1 PLC ±0.3 2 PLC ±0.3 3 PLC ± 4 PLC ± ANGLES ± FINISH		WEIGHT -	CAGE CODE C-184095			
MATERIAL PHOS BRZ (0.3 THK)		CUSTOMER DRAWING	SCALE 10:1		SHEET 1 OF 1	REV U2