

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

20

© COPYRIGHT 20 BY -




ALL RIGHTS RESERVED.

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	BB	INITIAL RELEASE	18NOV2015	KR	TN

NOTES:

1. POWER RATING: 600W
2. INSULATION RESISTANCE DC 500V - 20 M Ohms MIN.
3. VOLTAGE RESISTABILITY: AC 2500V 1 MINUTE
4. TUBE BORE AND SIDE FACES SHOULD BE FREE OF PAINT
5. PARTS SHALL BE BLANK, SMOOTH, FREE OF BURRS AND ALL OTHER FOREIGN MATERIAL
6. FOR FURTHER INFORMATION SEE DATASHEET FOR TE SERIES HIGH POWER WIRE WOUND RESISTOR
7. FOR A SPECIFIC PART NUMBER RESISTANCE VALUE AND TOLERANCE , PLEASE REFER TO DMF
8. FOR SPECIFIC PART NUMBER, RESISTANCE VALUE AND TOLERANCE PLEASE REFER TO SMART PART SEARCH

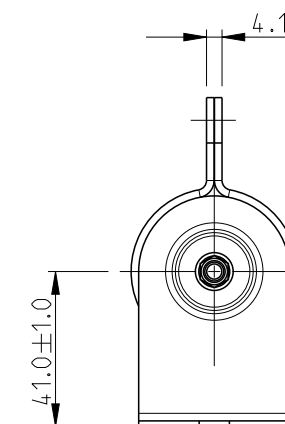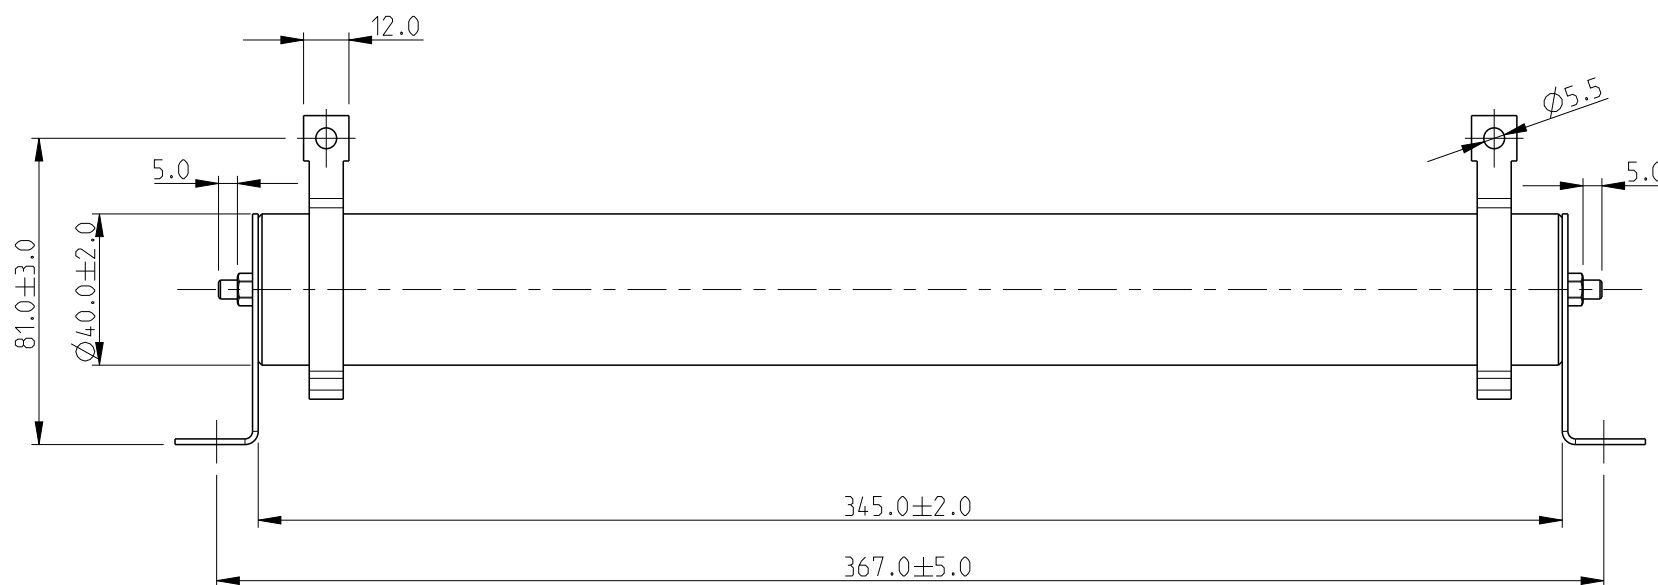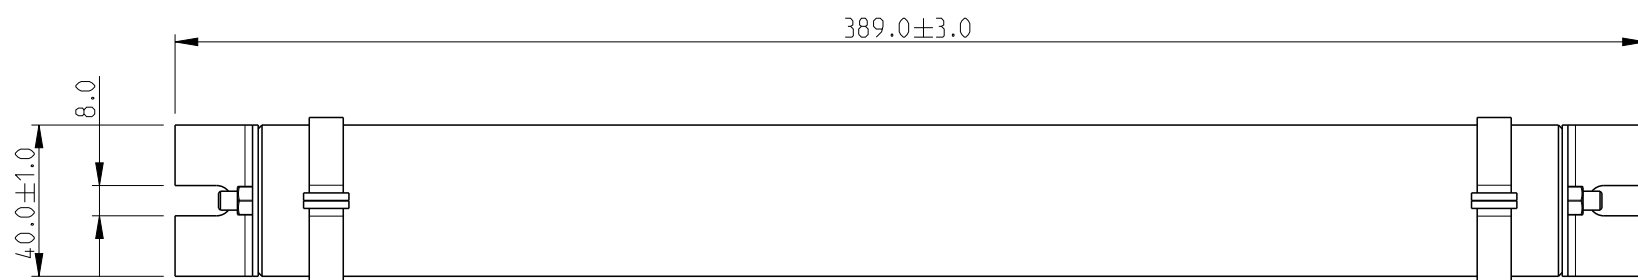

RoHS Compliant

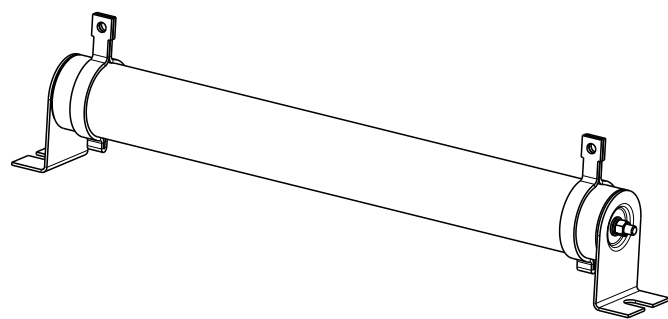

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
	0 PLC ±0.5
	1 PLC ±0.1
	2 PLC ±0.05
	3 PLC ±
	4 PLC ±
	ANGLES ±0.5°
MATERIAL	FINISH
-	-
-	-

DWN	16NOV2015
CHK	RAGHAVENDRA K
APVD	16NOV2015
ALLAN P	
TONY N	
PRODUCT SPEC	
APPLICATION SPEC	
WEIGHT	-
CUSTOMER DRAWING	

TE Connectivity		NAME		RESTRICTED TO
		HIGH POWER WIRE WOUND RESISTOR TE 600W SERIES		
SIZE	CAGE CODE	DRAWING NO		
A3	-	1879451		
SCALE	1:2	SHEET	1 OF 1	REV
				BB