


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.







LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—	B1		REVISED PER ECR-10-019989	05OCT10	HMR	TM

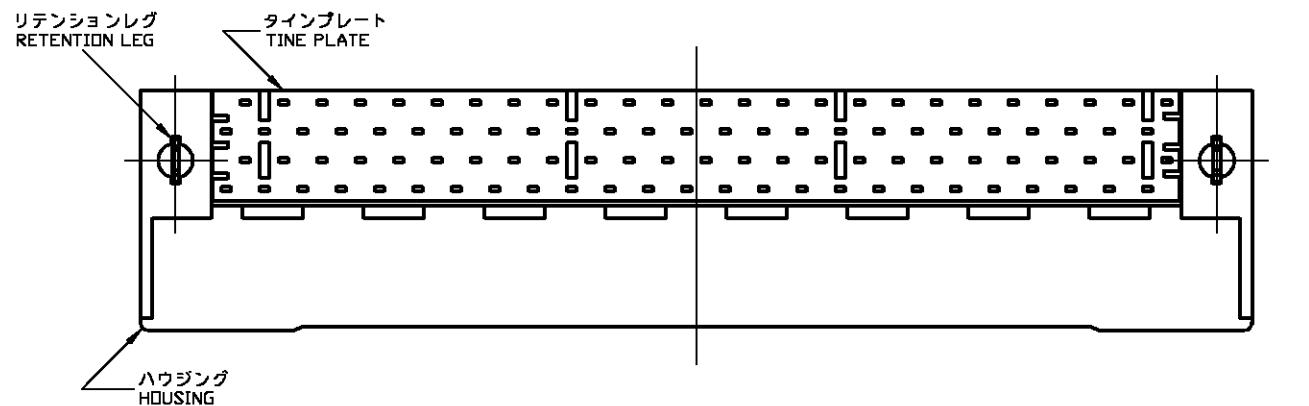

- 注記
 ① 材料および仕上げ
 コンタクト：銅合金
 全面Ni下地めっき1.27μm以上
 接点部Auめっき0.5μm以上
 はんだ付け部Snめっき2μm以上
 リテンションレグ：銅合金
 全面Ni下地めっき1.27μm以上
 はんだ付け部Snめっき2μm以上
 ハウジング：液晶ポリマー
 色：自然色（白）
 タイムプレート：液晶ポリマー
 色：自然色（白）
 ② タイムプレートは可動式
 ③ () 内寸法は参考寸法

- NOTE
 ① MATERIAL AND FINISH
 CONTACT : COPPER ALLOY
 UNDER Ni PLATING ALL SURFACE 1.27μmMIN
 CONTACT AREA Au PLATING 0.5μmMIN
 SOLDERING AREA Sn PLATING 2μmMIN
 RETENTION LEG : COPPER ALLOY
 UNDER Ni PLATING ALL SURFACE 1.27μmMIN
 SOLDERING AREA Sn PLATING 2μmMIN
 HOUSING : LIQUID CRYSTAL POLYMER
 COLOR : NATURAL (WHITE)
 TINE PLATE : LIQUID CRYSTAL POLYMER
 COLOR : NATURAL (WHITE)
 ② TINE PLATE IS MOVABLE.
 ③ () MEANS REFERENCE DIMENSION.

コンタクトはんだ付け部断面(±0.2xw0.5)
 CONTACT SOLDERING AREA CROSS SECTION (±0.2xw0.5)

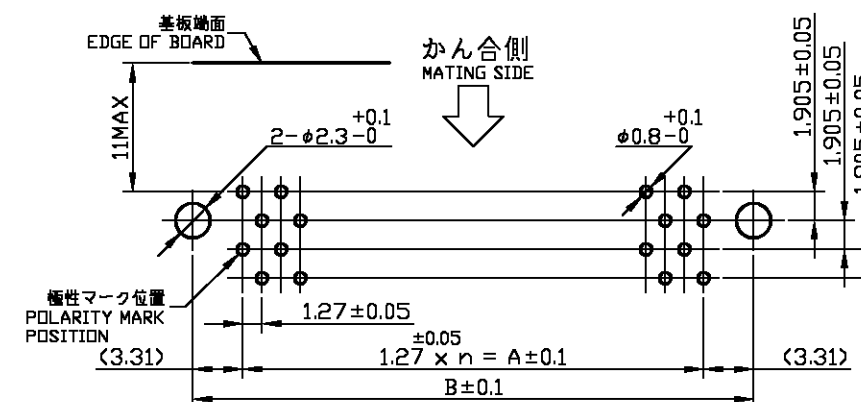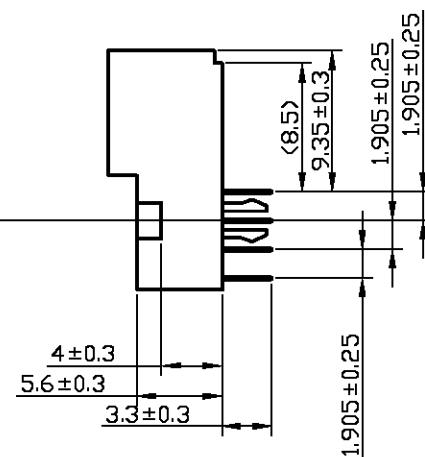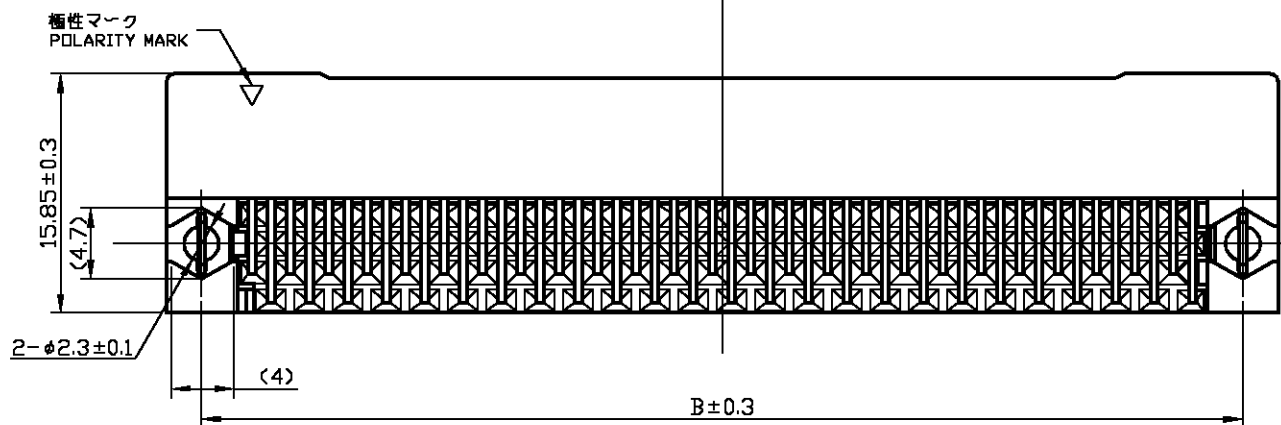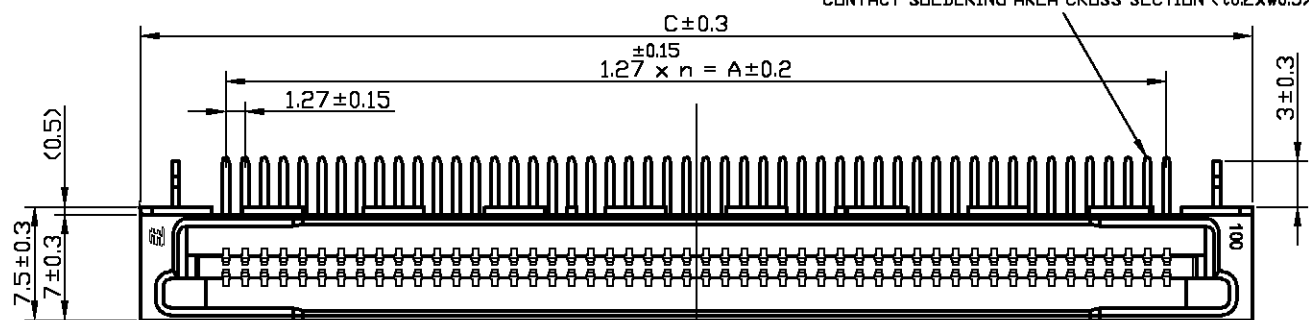

推奨基板寸法（実装面側）適用基板厚t=1.6mm
 RECOMMENDED BOARD DIMENSION (CONNECTOR MOUNTING SIDE)
 RECOMMENDED BOARD THICKNESS t=1.6mm

20							
32							
40							
52							
60							
68							
80							
100	1903187-8	49	62.23	68.85	73.55		6.12g
120							
極数 NO. OF PDS.	型番 PART NUMBER	n	A	B	C		WEIGHT
			寸法 DIMENSIONS				

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
単位：mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0 PLC	±
1 PLC	±
2 PLC	±
3 PLC	±
4 PLC	±
ANGLES	±

MATERIAL 材料

FINISH 仕上

DWN	I.HASEGAWA	12JUL06		Tyco Electronics AMP K.K.	
CHK	I.HASEGAWA	12JUL06		Kawasaki, Japan	
APVD	T.MASAKI	12JUL06	NAME 名称	INDUSTRIAL EXPRESS CONN.	
PRODUCT SPEC	製品規格	108-78321	1.27MM PITCH RIGHTANGLE PLUG ASSY		
APPLICATION SPEC	取付適用規格		DIP		
WEIGHT	SEE TABLE		SIZE	CAGE CODE	DRAWING NO
CUSTOMER DRAWING			A3	00779	C-1903187
			RESTRICTED TO	SCALE 尺度	SHEET 1 OF 1
				2:1	REV B1