
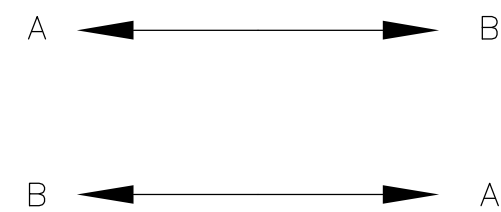


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	B	ECR 08-032590	29DEC08	LGE JD

- 1. SEE TABLE FOR MAXIMUM CONNECTOR INSERTION LOSS AT 1310nm.
- 2. MINIMUM RETURN LOSS: 55dB (1310nm)
- 3. TEST DATA PROVIDED WITH EACH ASSEMBLY.
- 4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

- 5. TEMPERATURE RATINGS -40°C - +85°C (REFERENCE)
- 6. ODVA CONNECTOR IS IP 67 RATED
- 7. SC CONNECTOR TESTED TO MEET TELCORDIA GR-326 (SM) AND TIA/EIA 568B.3 (MM)
- 8. FLAME RETARDANT MATERIAL PER UL 94 V-0 WITH EXCEPTION TO INNER TUBING WHICH IS UL VW-1, PROTECTIVE COVER WHICH IS NON-FR (SC) AND UL 94 HB (LC).

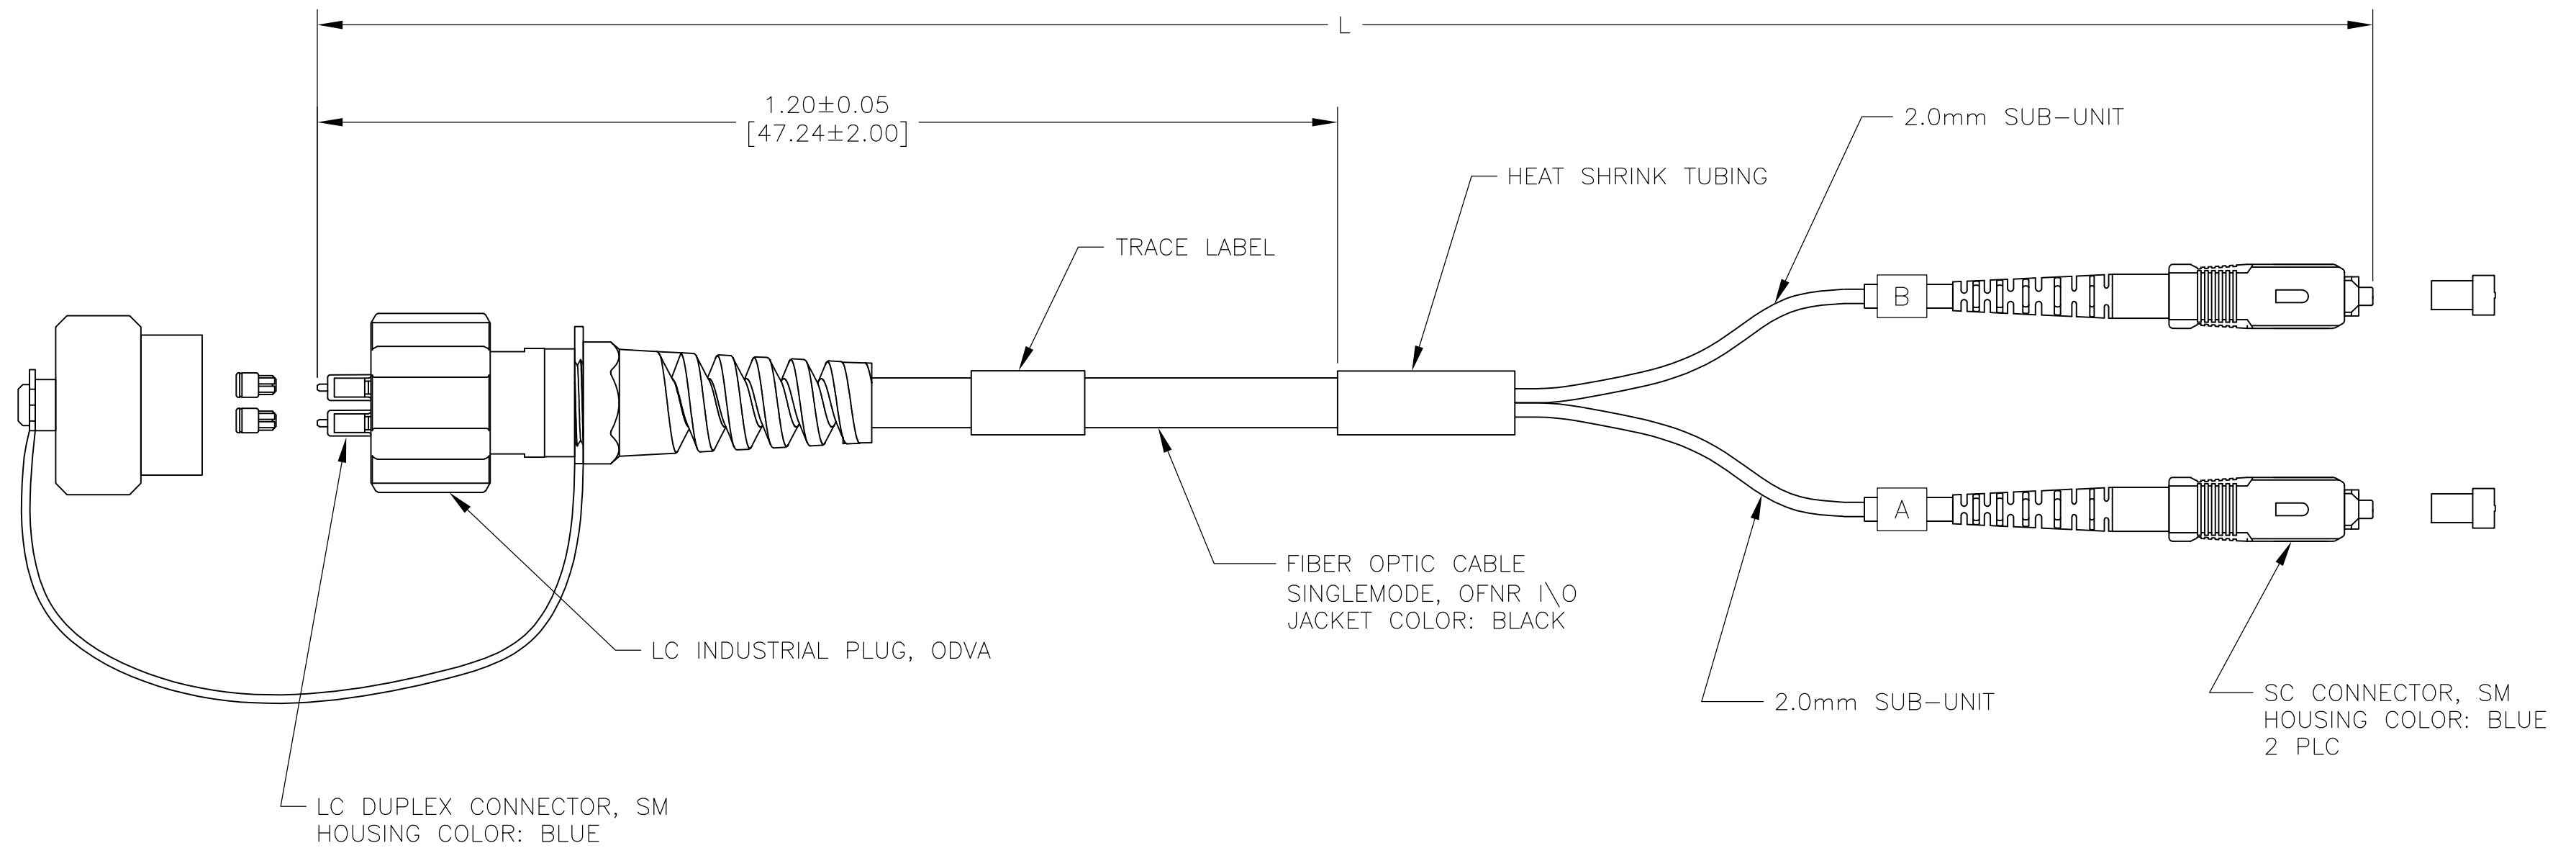

0.50	0.20	2.45±0.05 [80.7±2.0]	1918577-2
MAX IL (dB) SC	MAX IL (dB) ODVA	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 24MAY06 KATHY HE	Tyco Electronics Corporation Harrisburg, PA 17105-3608	
DIMENSIONS: METERS [INCHES]		CHK 24MAY06 J. DUNCAN	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD 24MAY06 J. DUNCAN	PRODUCT SPEC	
MATERIAL		APPLICATION SPEC	CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2 FIBER BREAKOUT CABLE SEALED LC DUPLEX (ODVA) TO DUAL SC	
FINISH		WEIGHT	SIZE A2	RESTRICTED TO
		CUSTOMER DRAWING	CAGE CODE 00779	DRAWING NO. 1918577
		SCALE NTS	SHEET 1 OF 1	REV B