
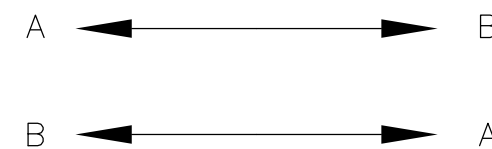


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DWN	APVD
CE	16	B	ECR 08-032590	30DEC08	LGE JD

- 1. SEE TABLE FOR MAXIMUM INSERTION LOSS AT 1310nm.
- 2. MINIMUM RETURN LOSS: 55dB (1310nm)
- 3. TEST DATA PROVIDED WITH EACH ASSEMBLY.
- 4. PRODUCT AND PROCESSING MUST MEET REQUIREMENTS OF TYCO ELECTRONICS STANDARD 230-702.

- 5. TEMPERATURE RATINGS -40°C - +85°C (REFERENCE)
- 6. ODVA CONNECTOR IS IP 67 RATED
- 7. SC/APC CONNECTOR TESTED TO MEET TELCORDIA GR-326 (SM) AND TIA/EIA 568B.3 (MM)
- 8. FLAME RETARDANT MATERIAL PER UL 94 V-0 WITH EXCEPTION TO INNER TUBING WHICH IS UL VW-1, PROTECTIVE COVER WHICH IS NON-FR (SC) AND UL 94 HB (LC).

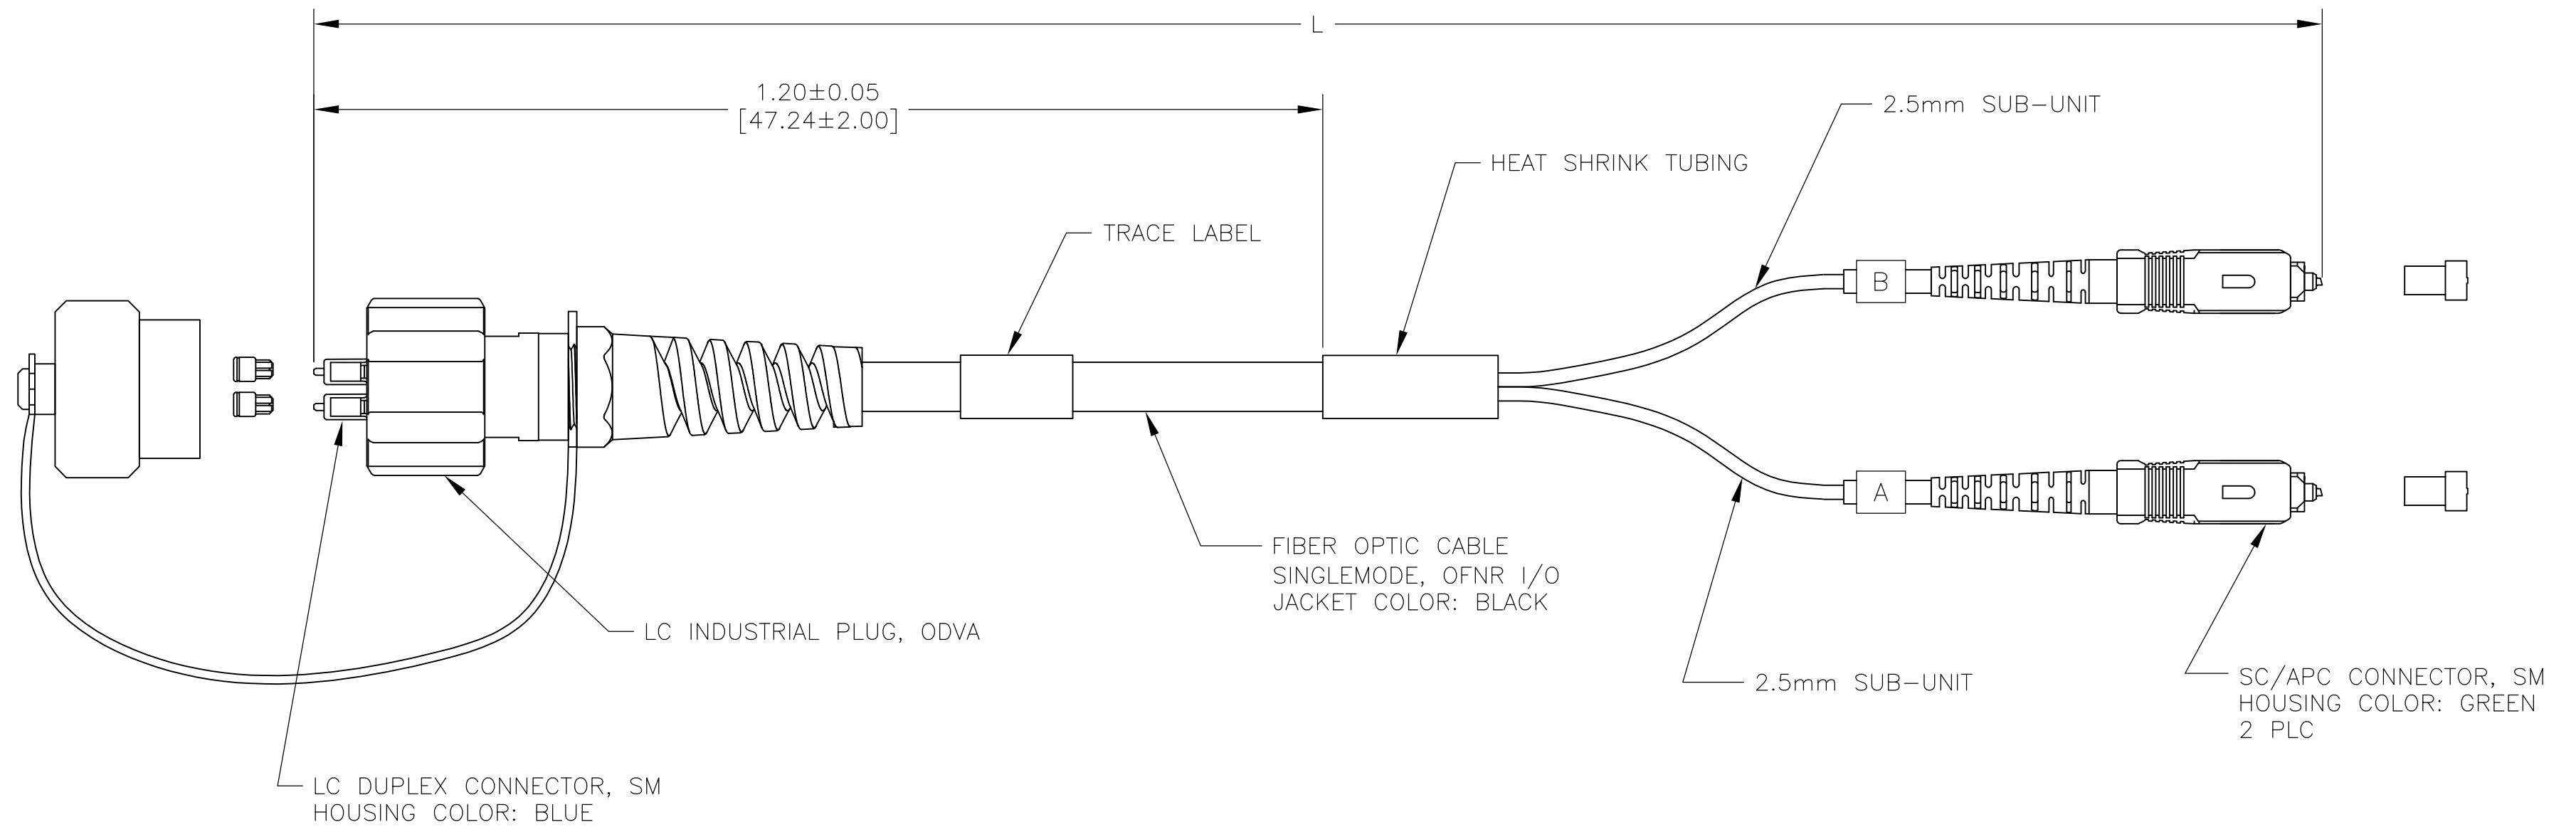

FIBER PATH

0.20	0.50	2.45±0.05 [80.7±2.0]	1918823-2
MAX IL (dB) (ODVA)	MAX IL (dB) (SC/APC)	L METERS [INCHES]	PART NUMBER

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	OBAUG06	Tyco Electronics Corporation Harrisburg, PA 17105-3608
		CHK	OBAUG06	
DIMENSIONS: METERS [INCHES]		APVD		CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2 FIBER BREAKOUT CABLE SEALED LC DUPLEX (ODVA) TO DUAL SC/APC
		OBAUG06		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME		SIZE CAGE CODE DRAWING NO RESTRICTED TO A2 00779 C=1918823
0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± - FINISH -		PRODUCT SPEC APPLICATION SPEC WEIGHT -		
MATERIAL -		CUSTOMER DRAWING		SCALE NTS SHEET 1 OF 1 REV B