
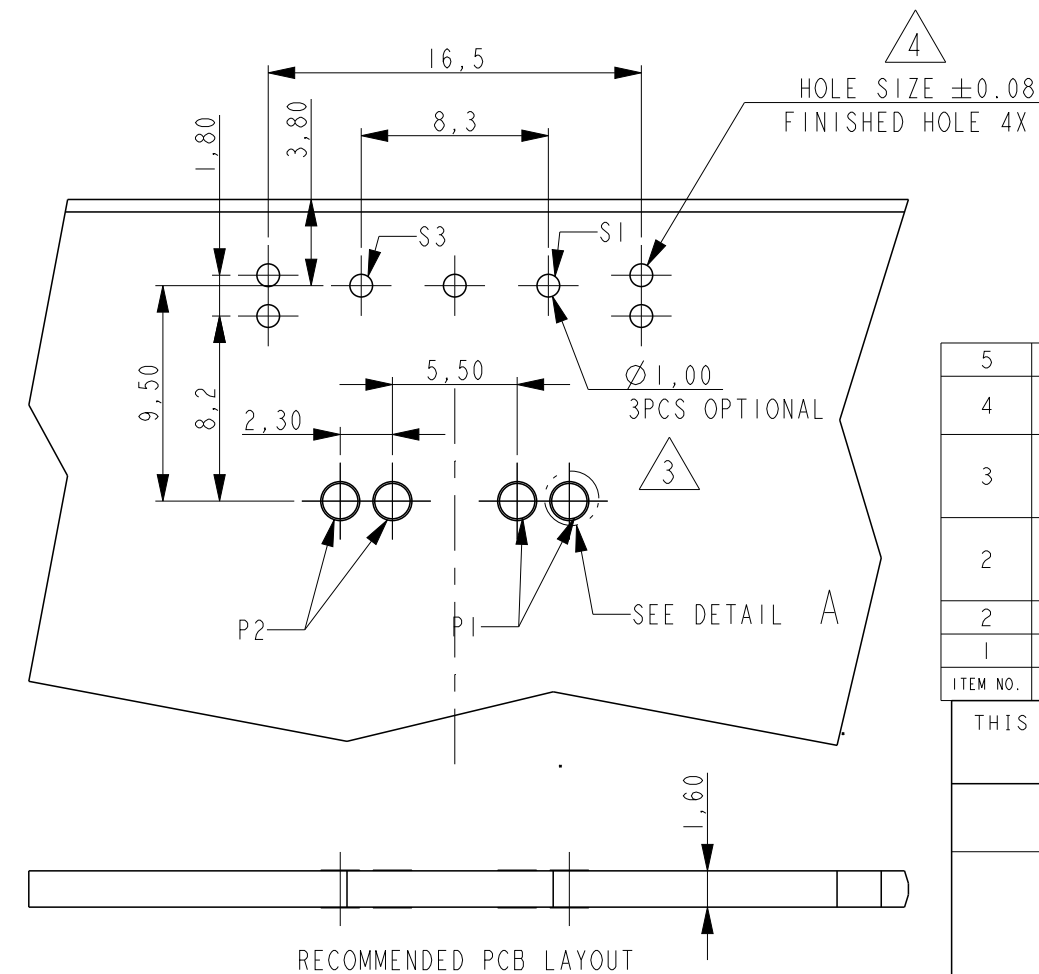
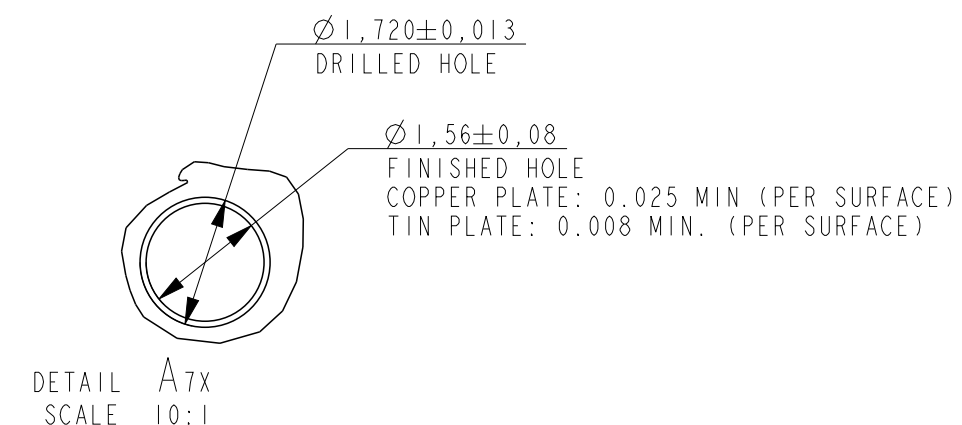
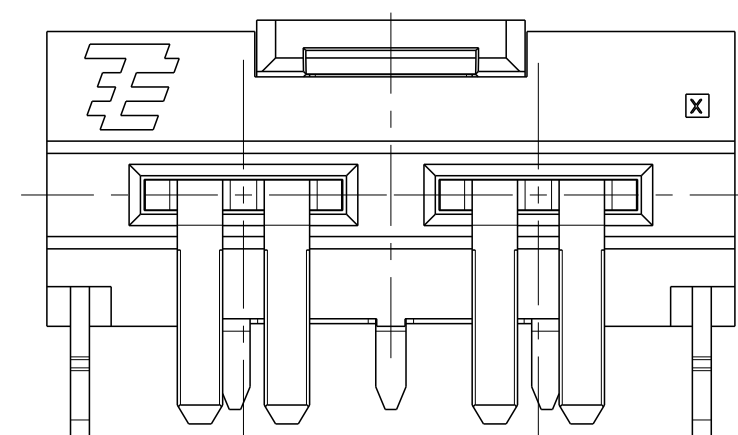
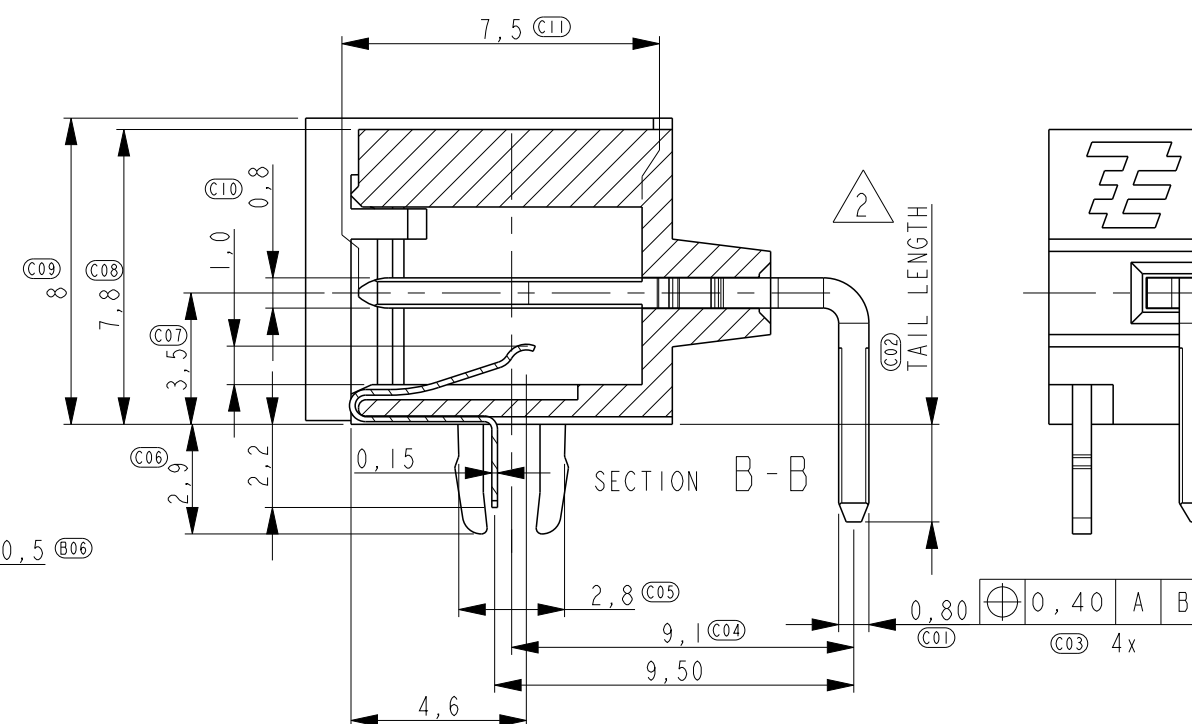
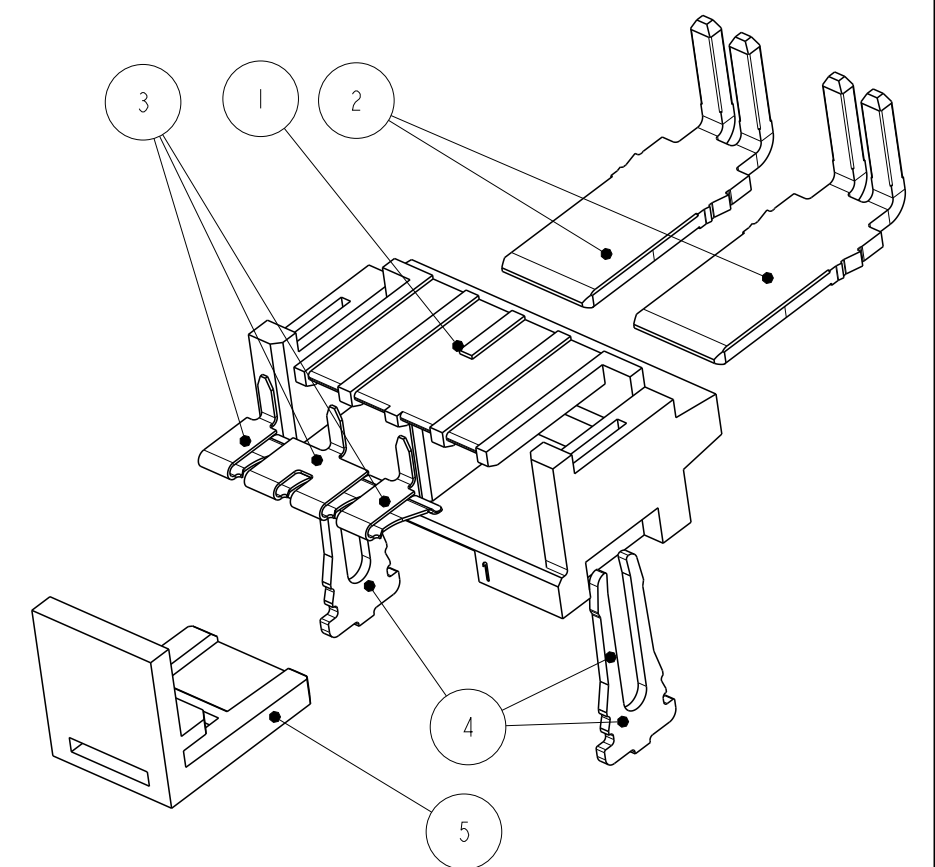


LOC	DIST	REVISIONS					
IR	-	P	LTR	DESCRIPTION	DATE	DWN	APVD
			C8	ADD -8	05JUN2023	OL	WY



5	PICK&PLACE ADAPTOR	POLYAMIDE,NATURAL		-	1	-	1	1	1
4	HOLD DOWN	DIN1544 CK75	5,0 µm Sn MIN OVER 2,5 µm Ni MIN ALL OVER.	2	2	2	2	2	2
3	CONTACT DETECTION	COPPER ALLOY	0.75 µm Au MIN. IN CONTACT PLACE, Au FLASH IN SOLDER AREA OVER 1.27µm Ni MIN ALL OVER	-	-	4	-	-	4
2	CONTACT POWER TAB	COPPER ALLOY	1.2µm Ni MIN. ALL OVER 0.75µm Au MIN AT MATING ZONE Au FLASH AT SOLDER ZONE	-	2	-	2	-	-
2	CONTACT POWER TAB	COPPER ALLOY	3,0 µm Ag MIN ALL OVER.	2	-	2	-	2	2
1	HOUSING	LCP GF UL94V-0,BLACK		1	1	1	1	1	1
ITEM NO.	DESCRIPTION	MATERIAL	FINISH	QTY	QTY	QTY	QTY	QTY	QTY


4 HOLE SIZE IS 1.00MM FOR MOST APPLICATOIN
HOLE SIZE IS 1.5MM FOR NO INTERFERENCE WEHN MOUNTING FOR SPECIAL REQUIREMENT.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN 03-Jul-23 R. Annokke CHK 03-Jul-23 R. Annokke APVD 03-Jul-23 J. Broeksteeg		 TE Connectivity				
DIMENSIONS: mm		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0,5 1 PLC ±0,1 2 PLC ±0,05 3 PLC ±- 4 PLC ±- ANGLES ±2		NAME ELCON Mini, 2-position header right-angle				
		PRODUCT SPEC 108-19346 APPLICATION SPEC 114-19110						
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO	
-		-		A2	00779	G=1982295	-	
Customer Drawing						SCALE 5.1	SHEET 1 OF 3	REV C8

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
IR	-		-	SEE SHEET 1	-	-	-


NOTES:

1. TRAY (PN 3178822-1) PACKAGING IS ONLY FOR PN 1982295-5.

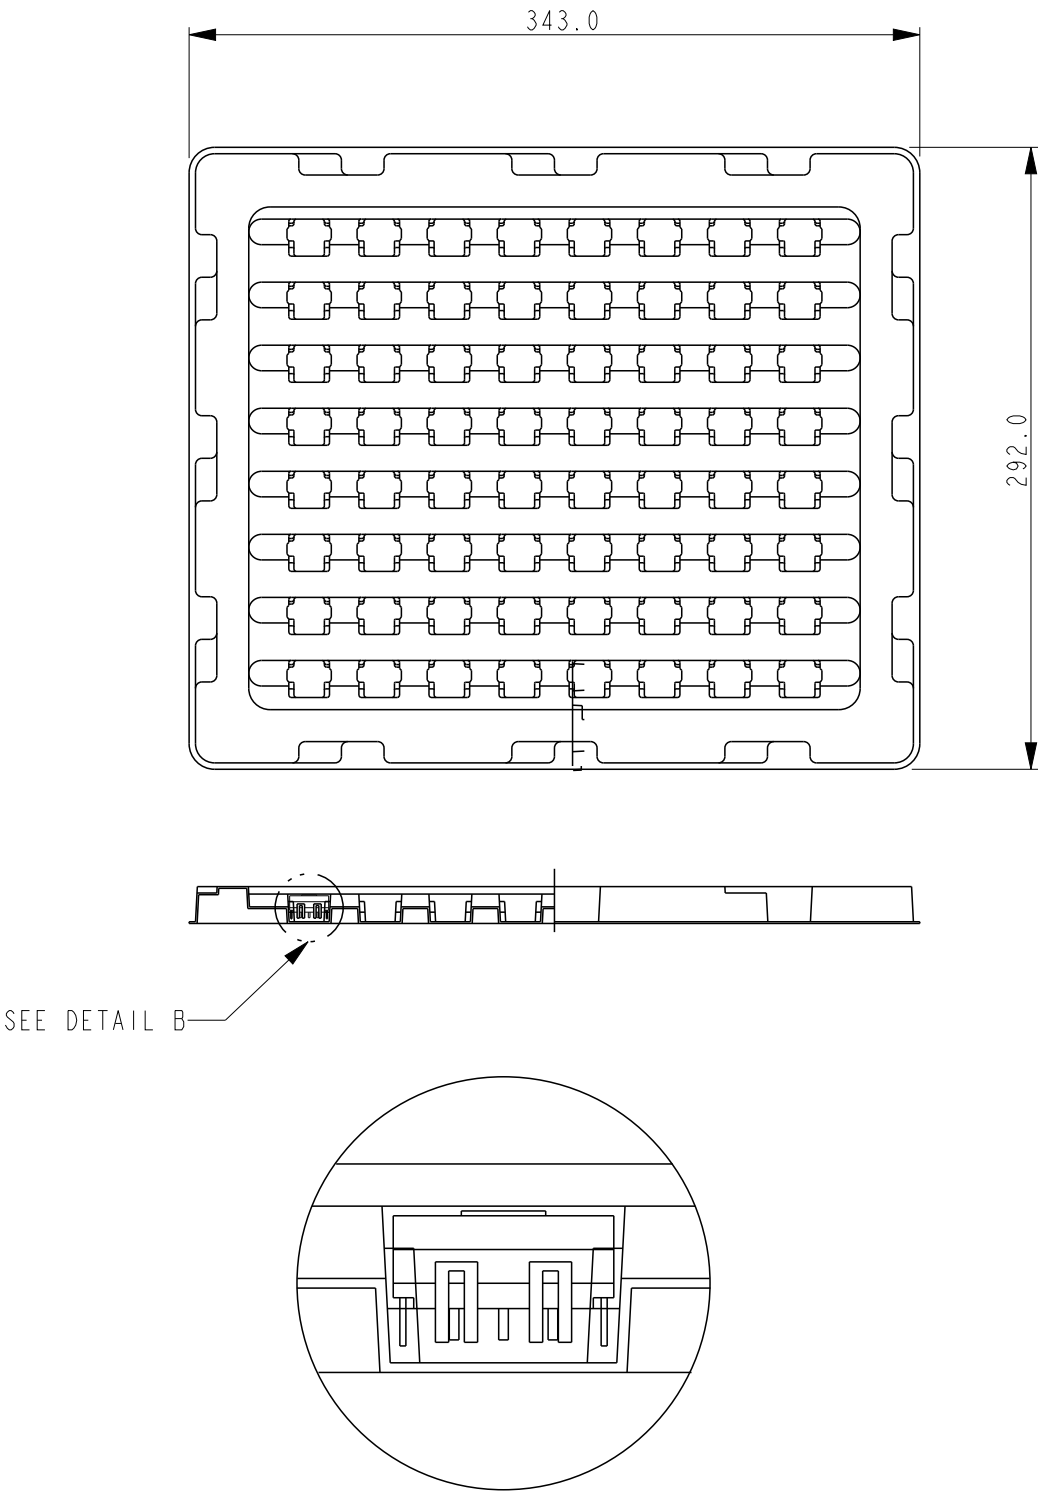

DETAIL B

DO NOT SCALE

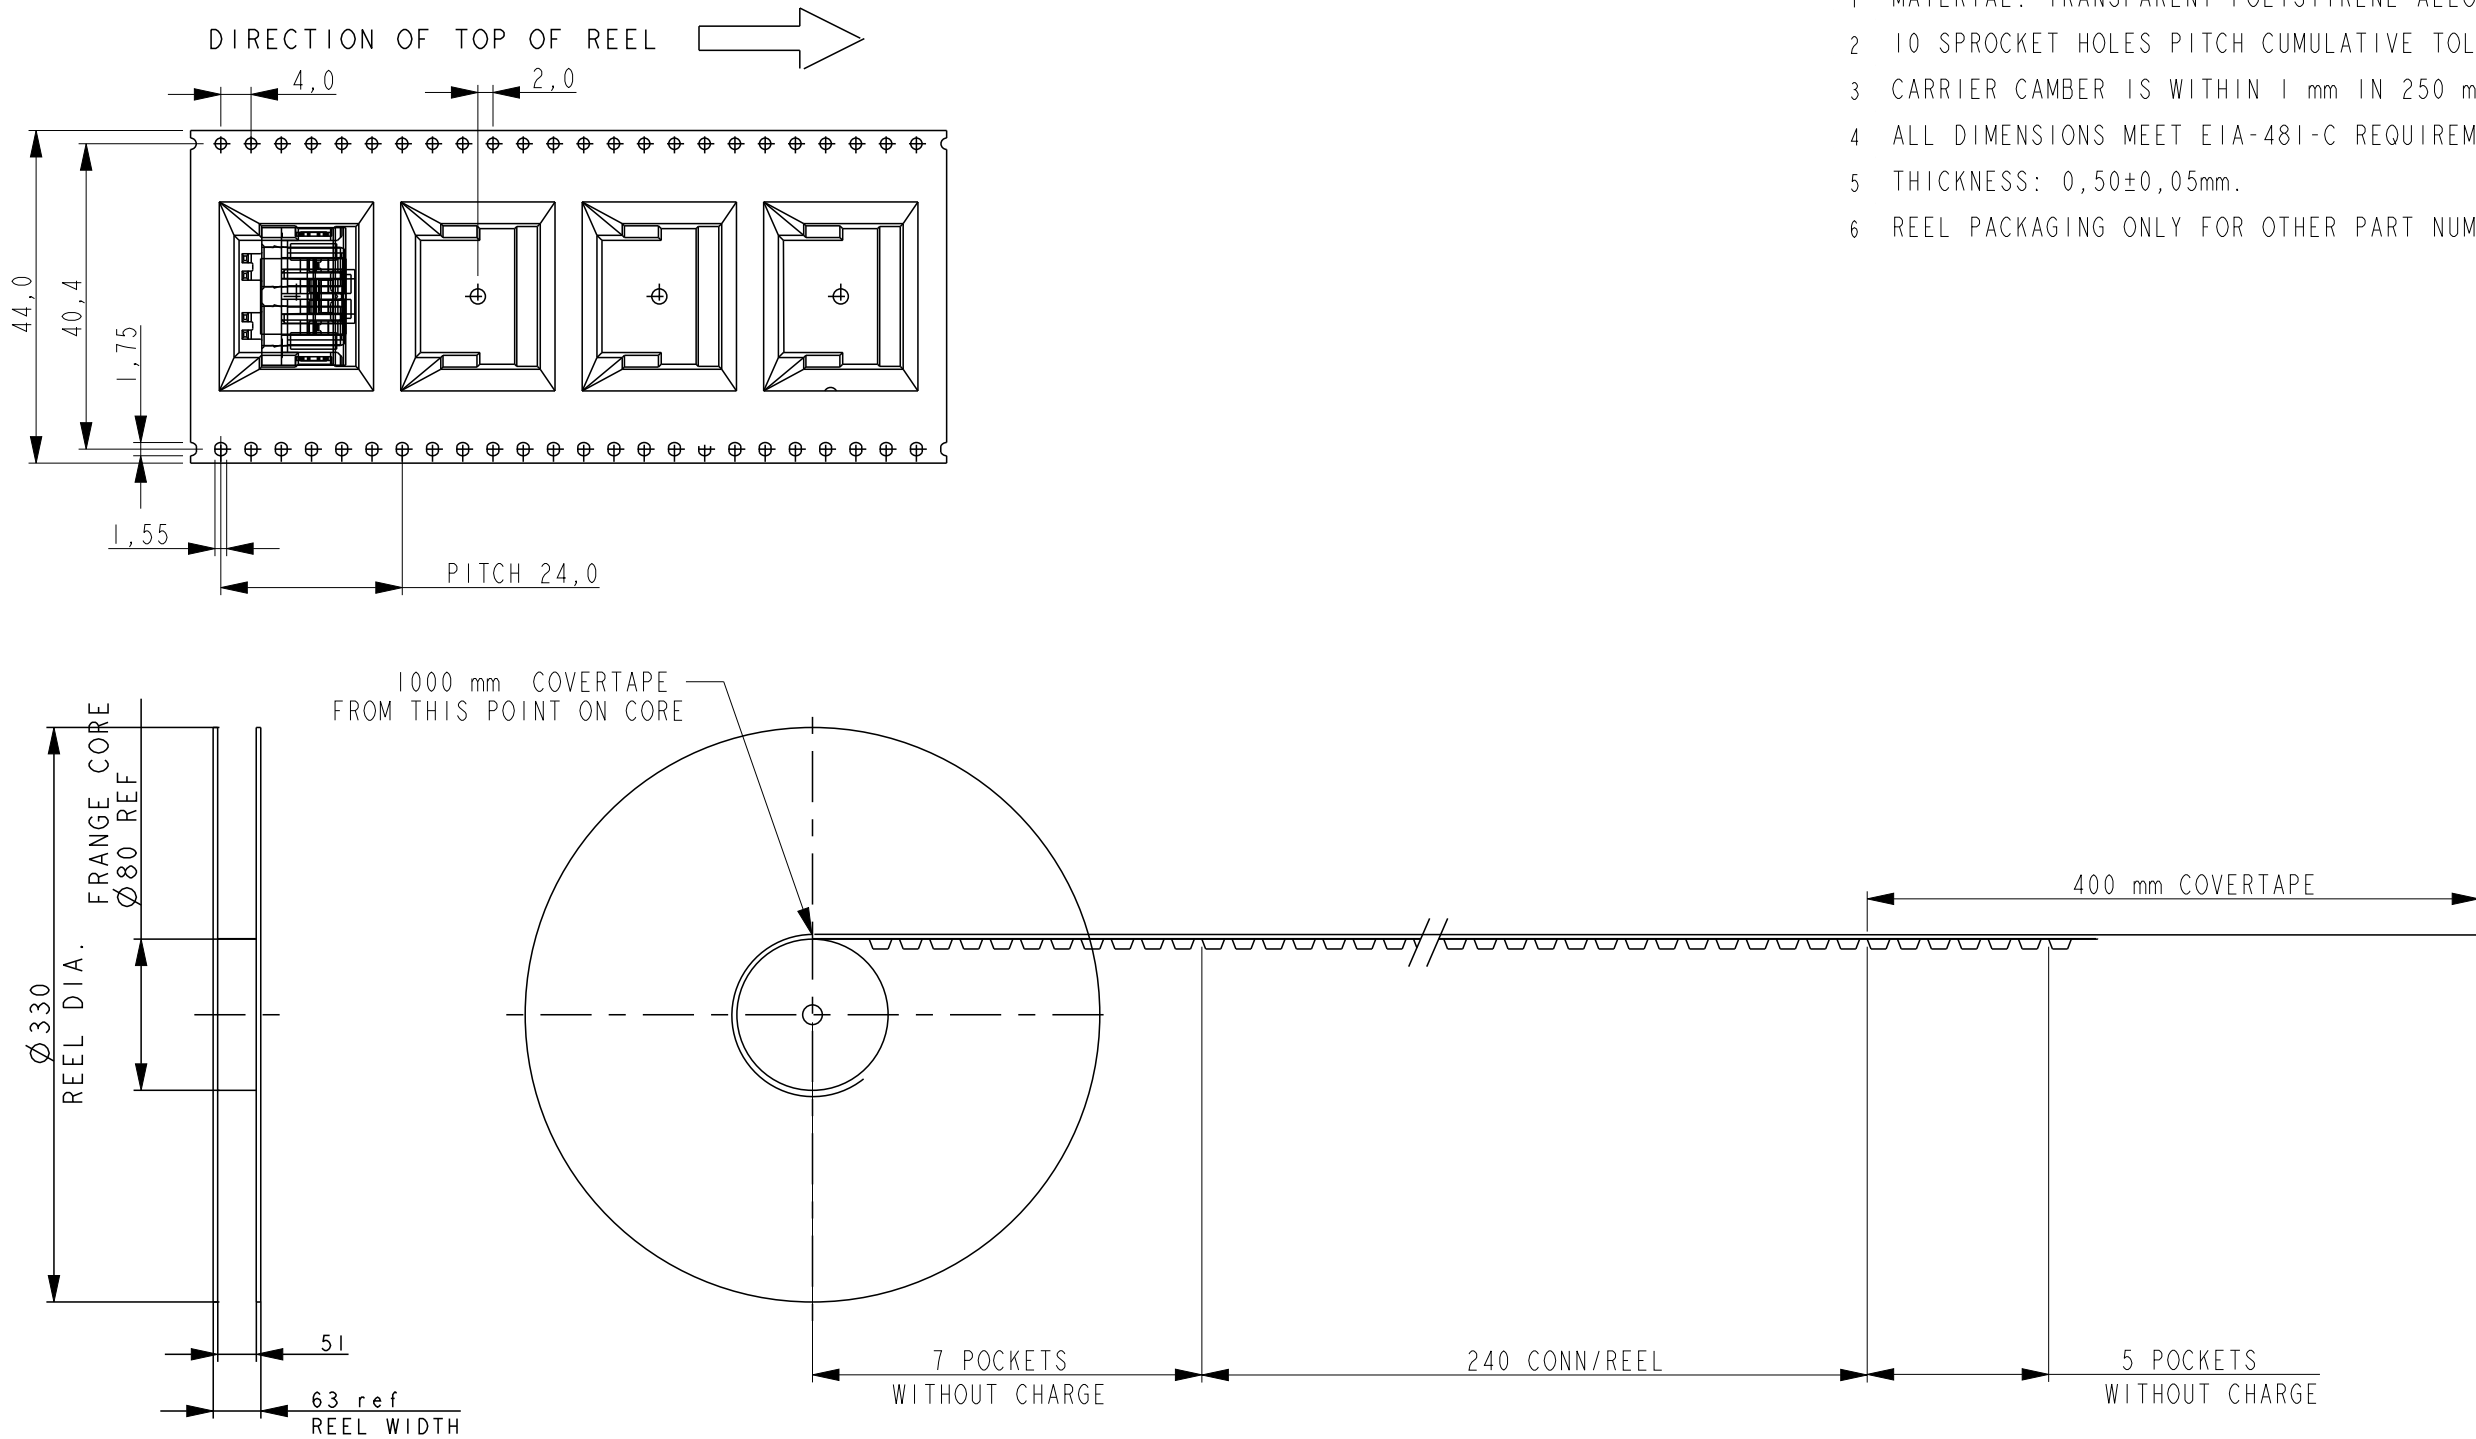

- NOTES:
- 1 MATERIAL: TRANSPARENT POLYSTYRENE ALLOY.
- 2 10 SPROCKET HOLES PITCH CUMULATIVE TOLERANCE +/-0,20.
- 3 CARRIER CAMBER IS WITHIN 1 mm IN 250 mm.
- 4 ALL DIMENSIONS MEET EIA-481-C REQUIREMENTS.
- 5 THICKNESS: 0,50±0,05mm.
- 6 REEL PACKAGING ONLY FOR OTHER PART NUMBERS.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. Annokkee 03-Jul-23	TE Connectivity			
DIMENSIONS: mm		CHK R. Annokkee 03-Jul-23				
		APVD J. Broeksteeg 03-Jul-23	NAME ELCON Mini, 2-position header right-angle			
		PRODUCT SPEC 108-19346				
MATERIAL -		APPLICATION SPEC 114-19110	SIZE A2		CAGE CODE 00779	DRAWING NO C-1982295
		WEIGHT -				
		Customer Drawing	SCALE 1:1		SHEET 2	OF 3
					REV C8	

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT -

TE CONNECTIVITY

ALL RIGHTS RESERVED.

LOC

IR

DIST

-

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	-	SEE SHEET 1	-	-	-

1982295-7 IS SHOWN
OTHER DIMENSIONS REFER TO SHEET 1

1

5

PICK&PLACE ADAPTOR

POLYAMIDE,NATURAL

5,0 µm Sn MIN OVER 2,5 µm Ni MIN ALL OVER.

1

4

HOLD DOWN

DINI544 CK75

0,75 µm Au MIN. IN CONTACT PLACE, Au FLASH IN SOLDER AREA OVER 1,27µm Ni MIN ALL OVER

-

3

CONTACT DETECTION

COPPER ALLOY

1.2µm Ni MIN. ALL OVER
0.75µm Au MIN AT MATING ZONE
Au FLASH AT SOLDER ZONE

2

2

CONTACT POWER TAB

COPPER ALLOY

3,0 µm Ag MIN ALL OVER.

-

2

CONTACT POWER TAB

COPPER ALLOY

1

1

HOUSING

LCP GF UL94V-0,BLACK

-7

ITEM

DESCRIPTION

MATERIAL

FINISH

THIS DRAWING IS A CONTROLLED DOCUMENT.

DWN
R. Annokkee
03-Jul-23

CHK
R. Annokkee
03-Jul-23

APVD
J. Broeksteeg
03-Jul-23

PRODUCT SPEC
108-19346

APPLICATION SPEC
114-19110

WEIGHT
-

Customer Drawing

DIMENSIONS:

mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ±0,5
1 PLC ±0,1
2 PLC ±0,05
3 PLC ±
4 PLC ±
ANGLES ±2
FINISH

MATERIAL

-

SCALE

5:1

SHEET

3

OF

3

REV

C8

TE Connectivity

ELCON Mini, 2-position header
right-angle

SIZE
A2

CAGE CODE
00779

DRAWING NO
C=1982295

RESTRICTED TO
-

1471-9 (3/11)