

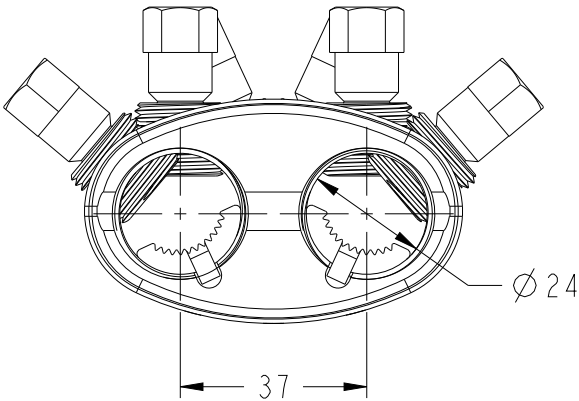
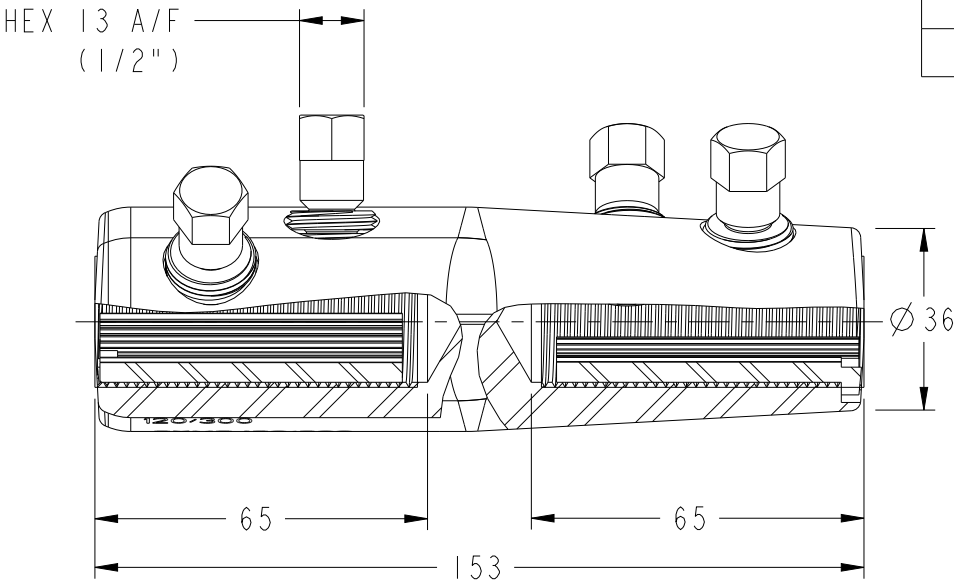


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	CREATION	07MAR2008	BM	NA
	B	RANGE TAKING TABLE	19AUG2010	BM	NA
	C	ECR-17-002227	16FEB2017	BM	NA
	D	HEX BOLT HEAD REDUCED PER ECR	14SEP2020	NB	BM

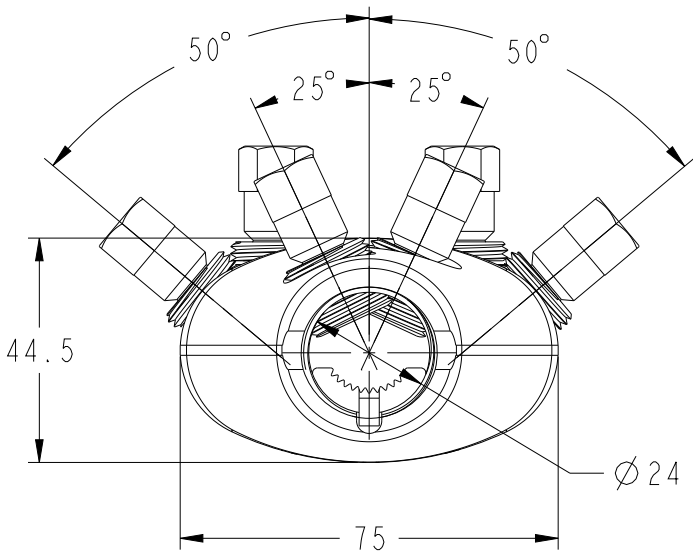


ECHELLE 1:2

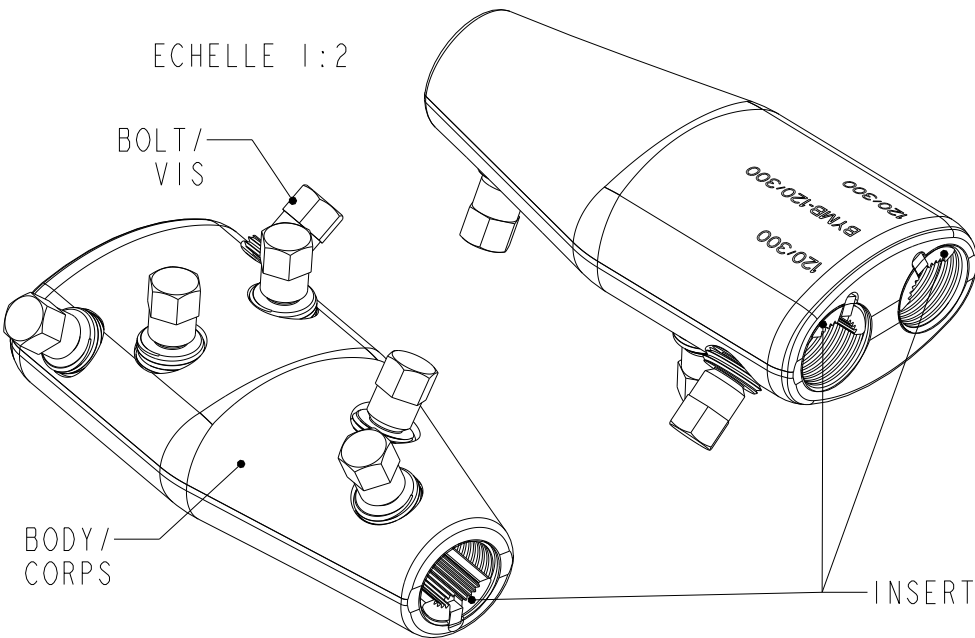

MAIN AND TAPE Haupt-kabel und Derivat-kabel	AL				CU	
	ROUND STRANDED /Rond câblé /RM	ROUND SOLID /Rond solide /RE	SECTOR STRANDED /Sectoral câblé /SM	SECTOR SOLID /Sectoral câblé /SE	ROUND STRANDED /Rond câblé /RM	SECTOR STRANDED /Sectoral câblé /SM
CONDUCTOR CROSS-SECTION /Section conducteur /Querschnittsbereich mm ²	120-300	150-300	120-185 (240 & 300 with rounding)	120-240 300 (90°)	120-300	120-185 (240 & 300 with rounding)
CONDUCTOR DIAMETER /Diamètre conducteur /Leiterdurchmesser mm	Ø12.7-Ø23.1	Ø12.9-Ø19.8	-	-	Ø12.7-Ø22.6	-

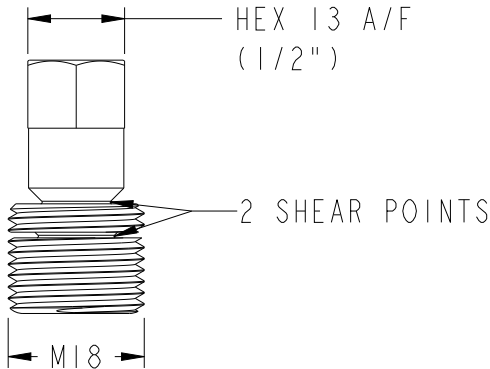

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN B. MILLOT 07MAR2008	 TE Connectivity			
DIMENSIONS: mm		CHK A. GUICHARD				
		APVD N. ALMEIDA	NAME BYMB-120/300			
		PRODUCT SPEC	-			
		APPLICATION SPEC	-			
		WEIGHT 759 g	SIZE A3	CAGE CODE -	DRAWING NO C-2037215	RESTRICTED TO
MATERIAL AL ALLOY		FINISH TINNED	CUSTOMER DRAWING			
			SCALE 2:3	SHEET 1	OF 1	REV D