




LOC		DIST		REVISIONS			
AD	00	P	LTN	DESCRIPTION	DATE	DWN	APVD
		A		CREATED BY AUTOMATION PROGRAM	03JUN2011	RKC	JE

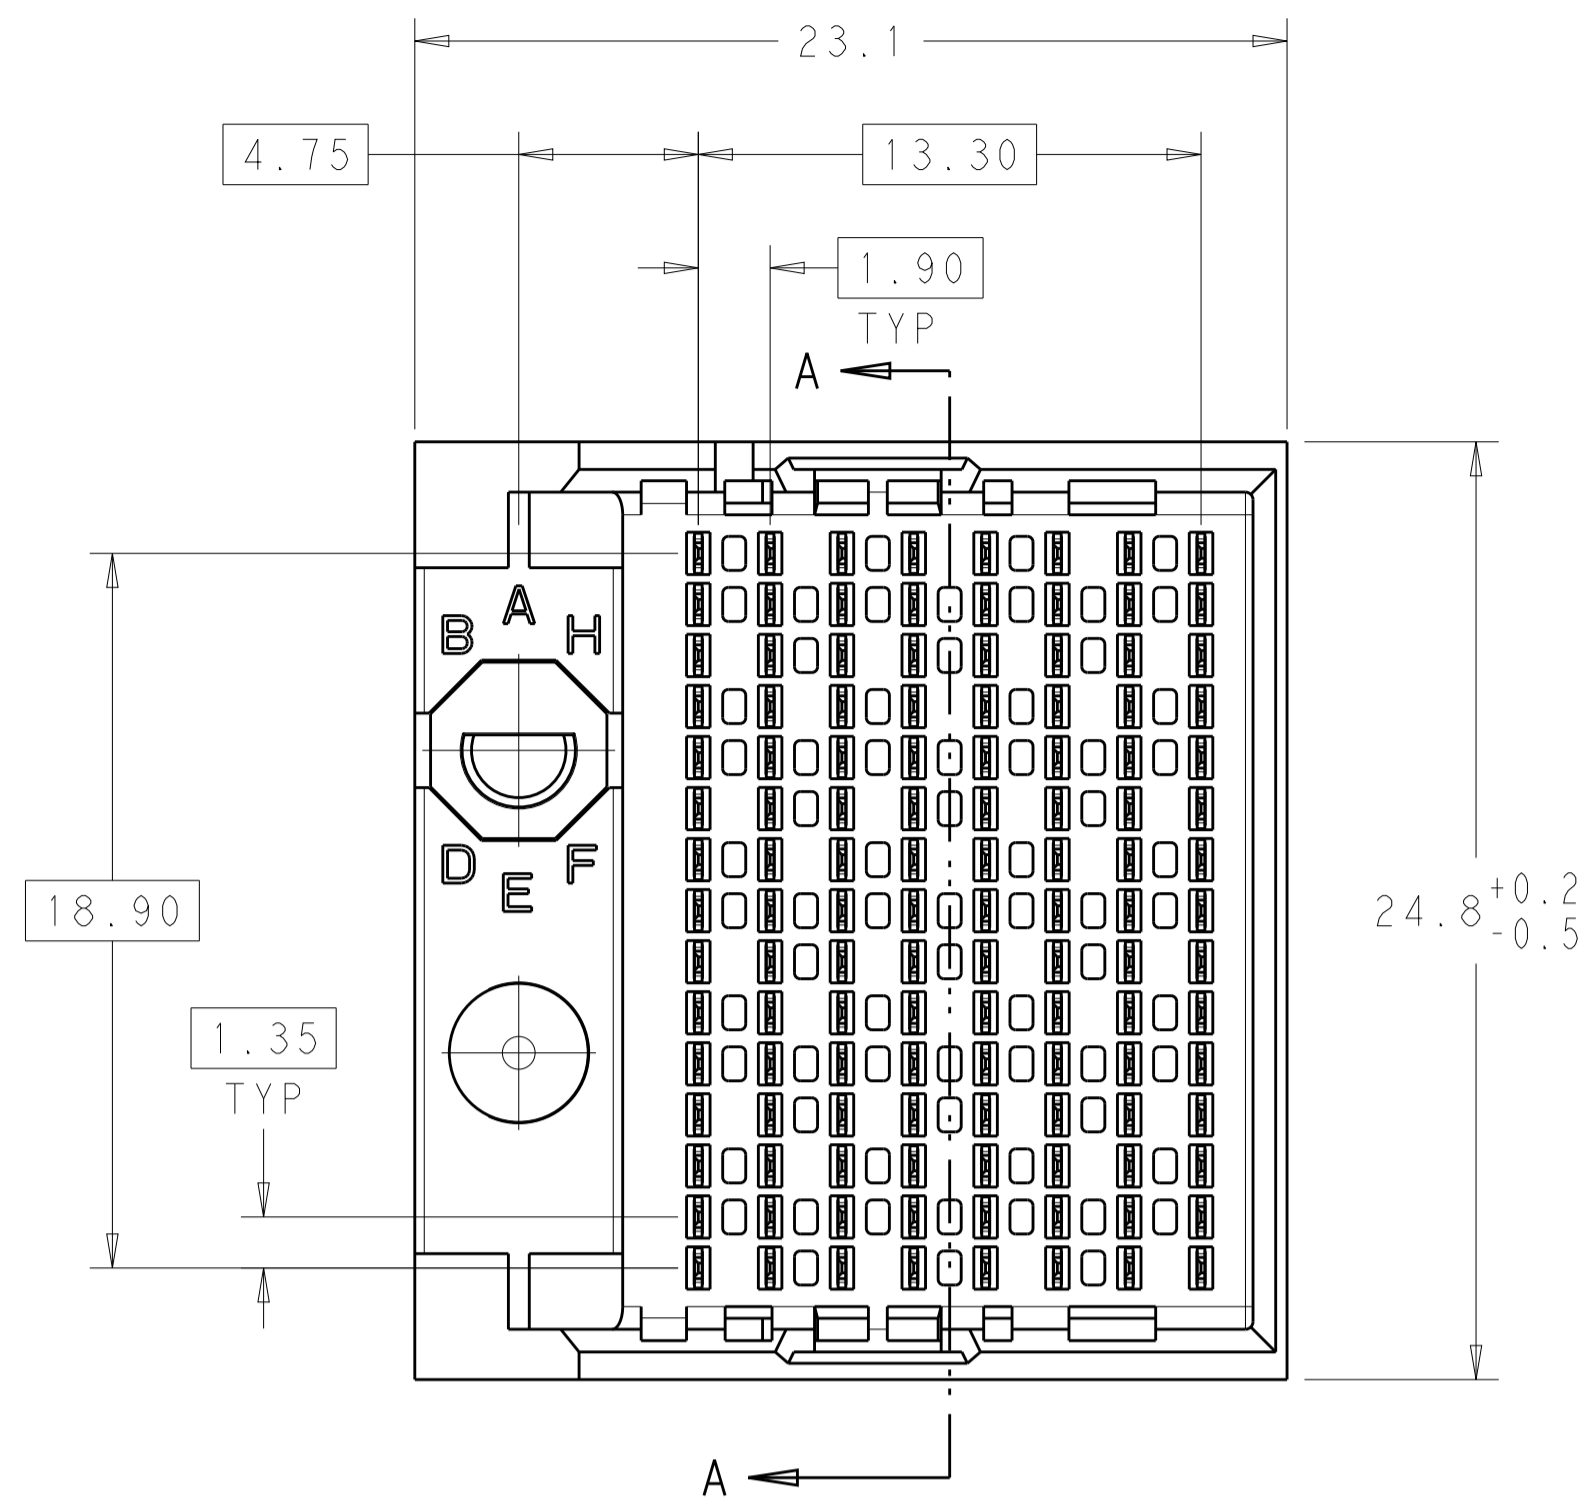


NOTCH DESIGNATES ROW A

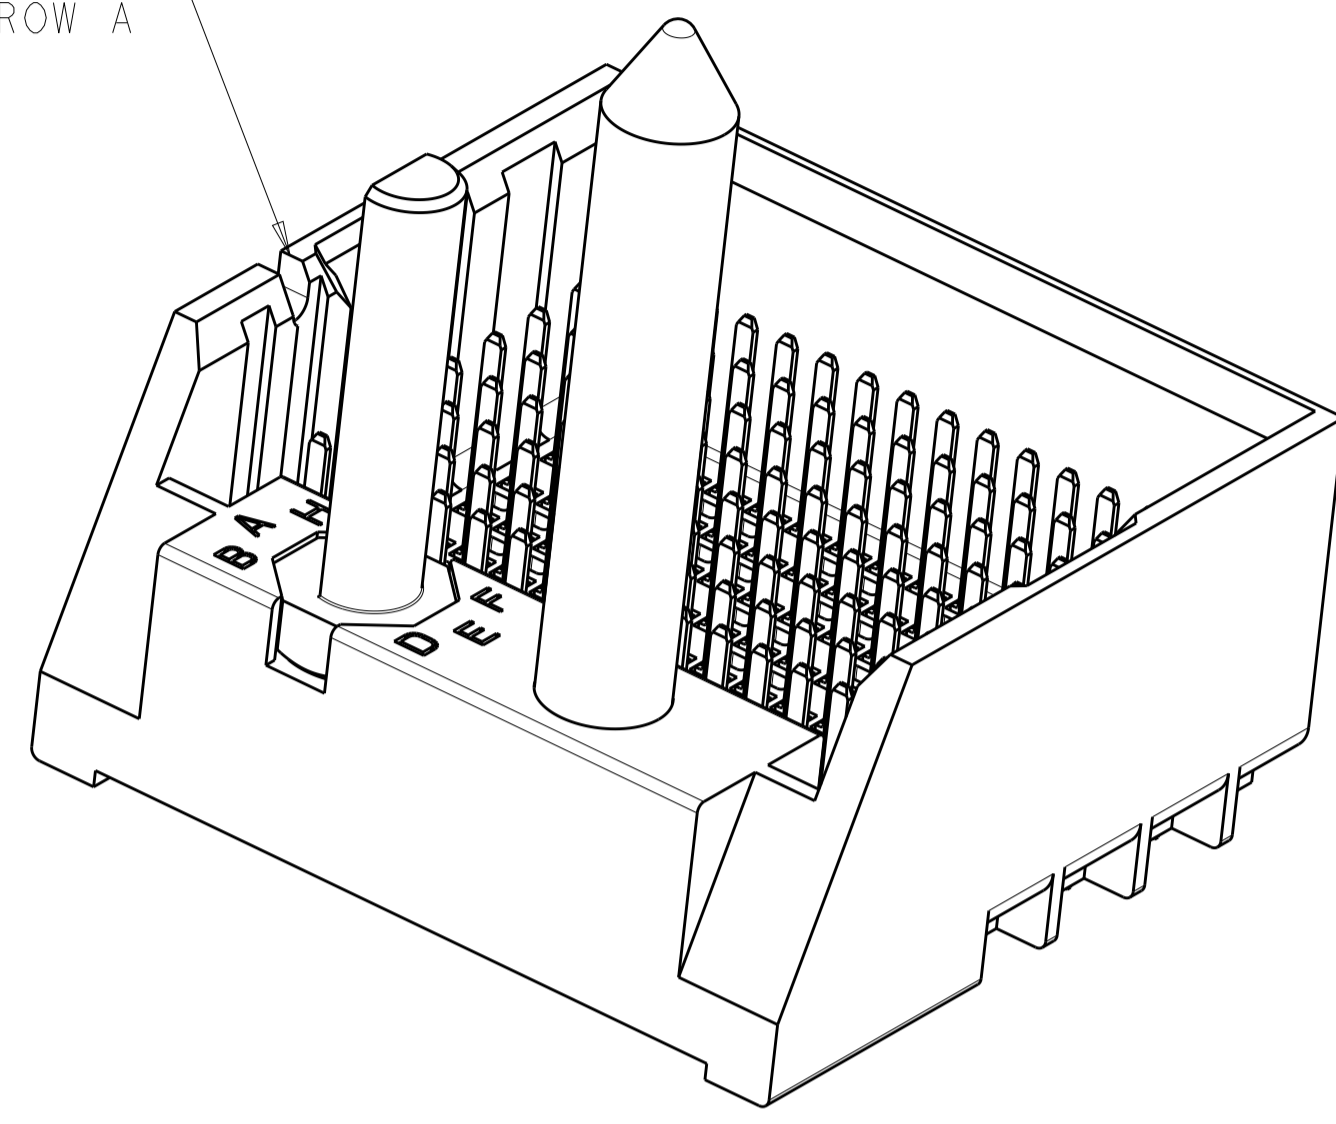


- 1 MATERIAL:  
HOUSING: LCP, GLASS FILLED, UL94V-0.  
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:  
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3 FINISH:  
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.
- 6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

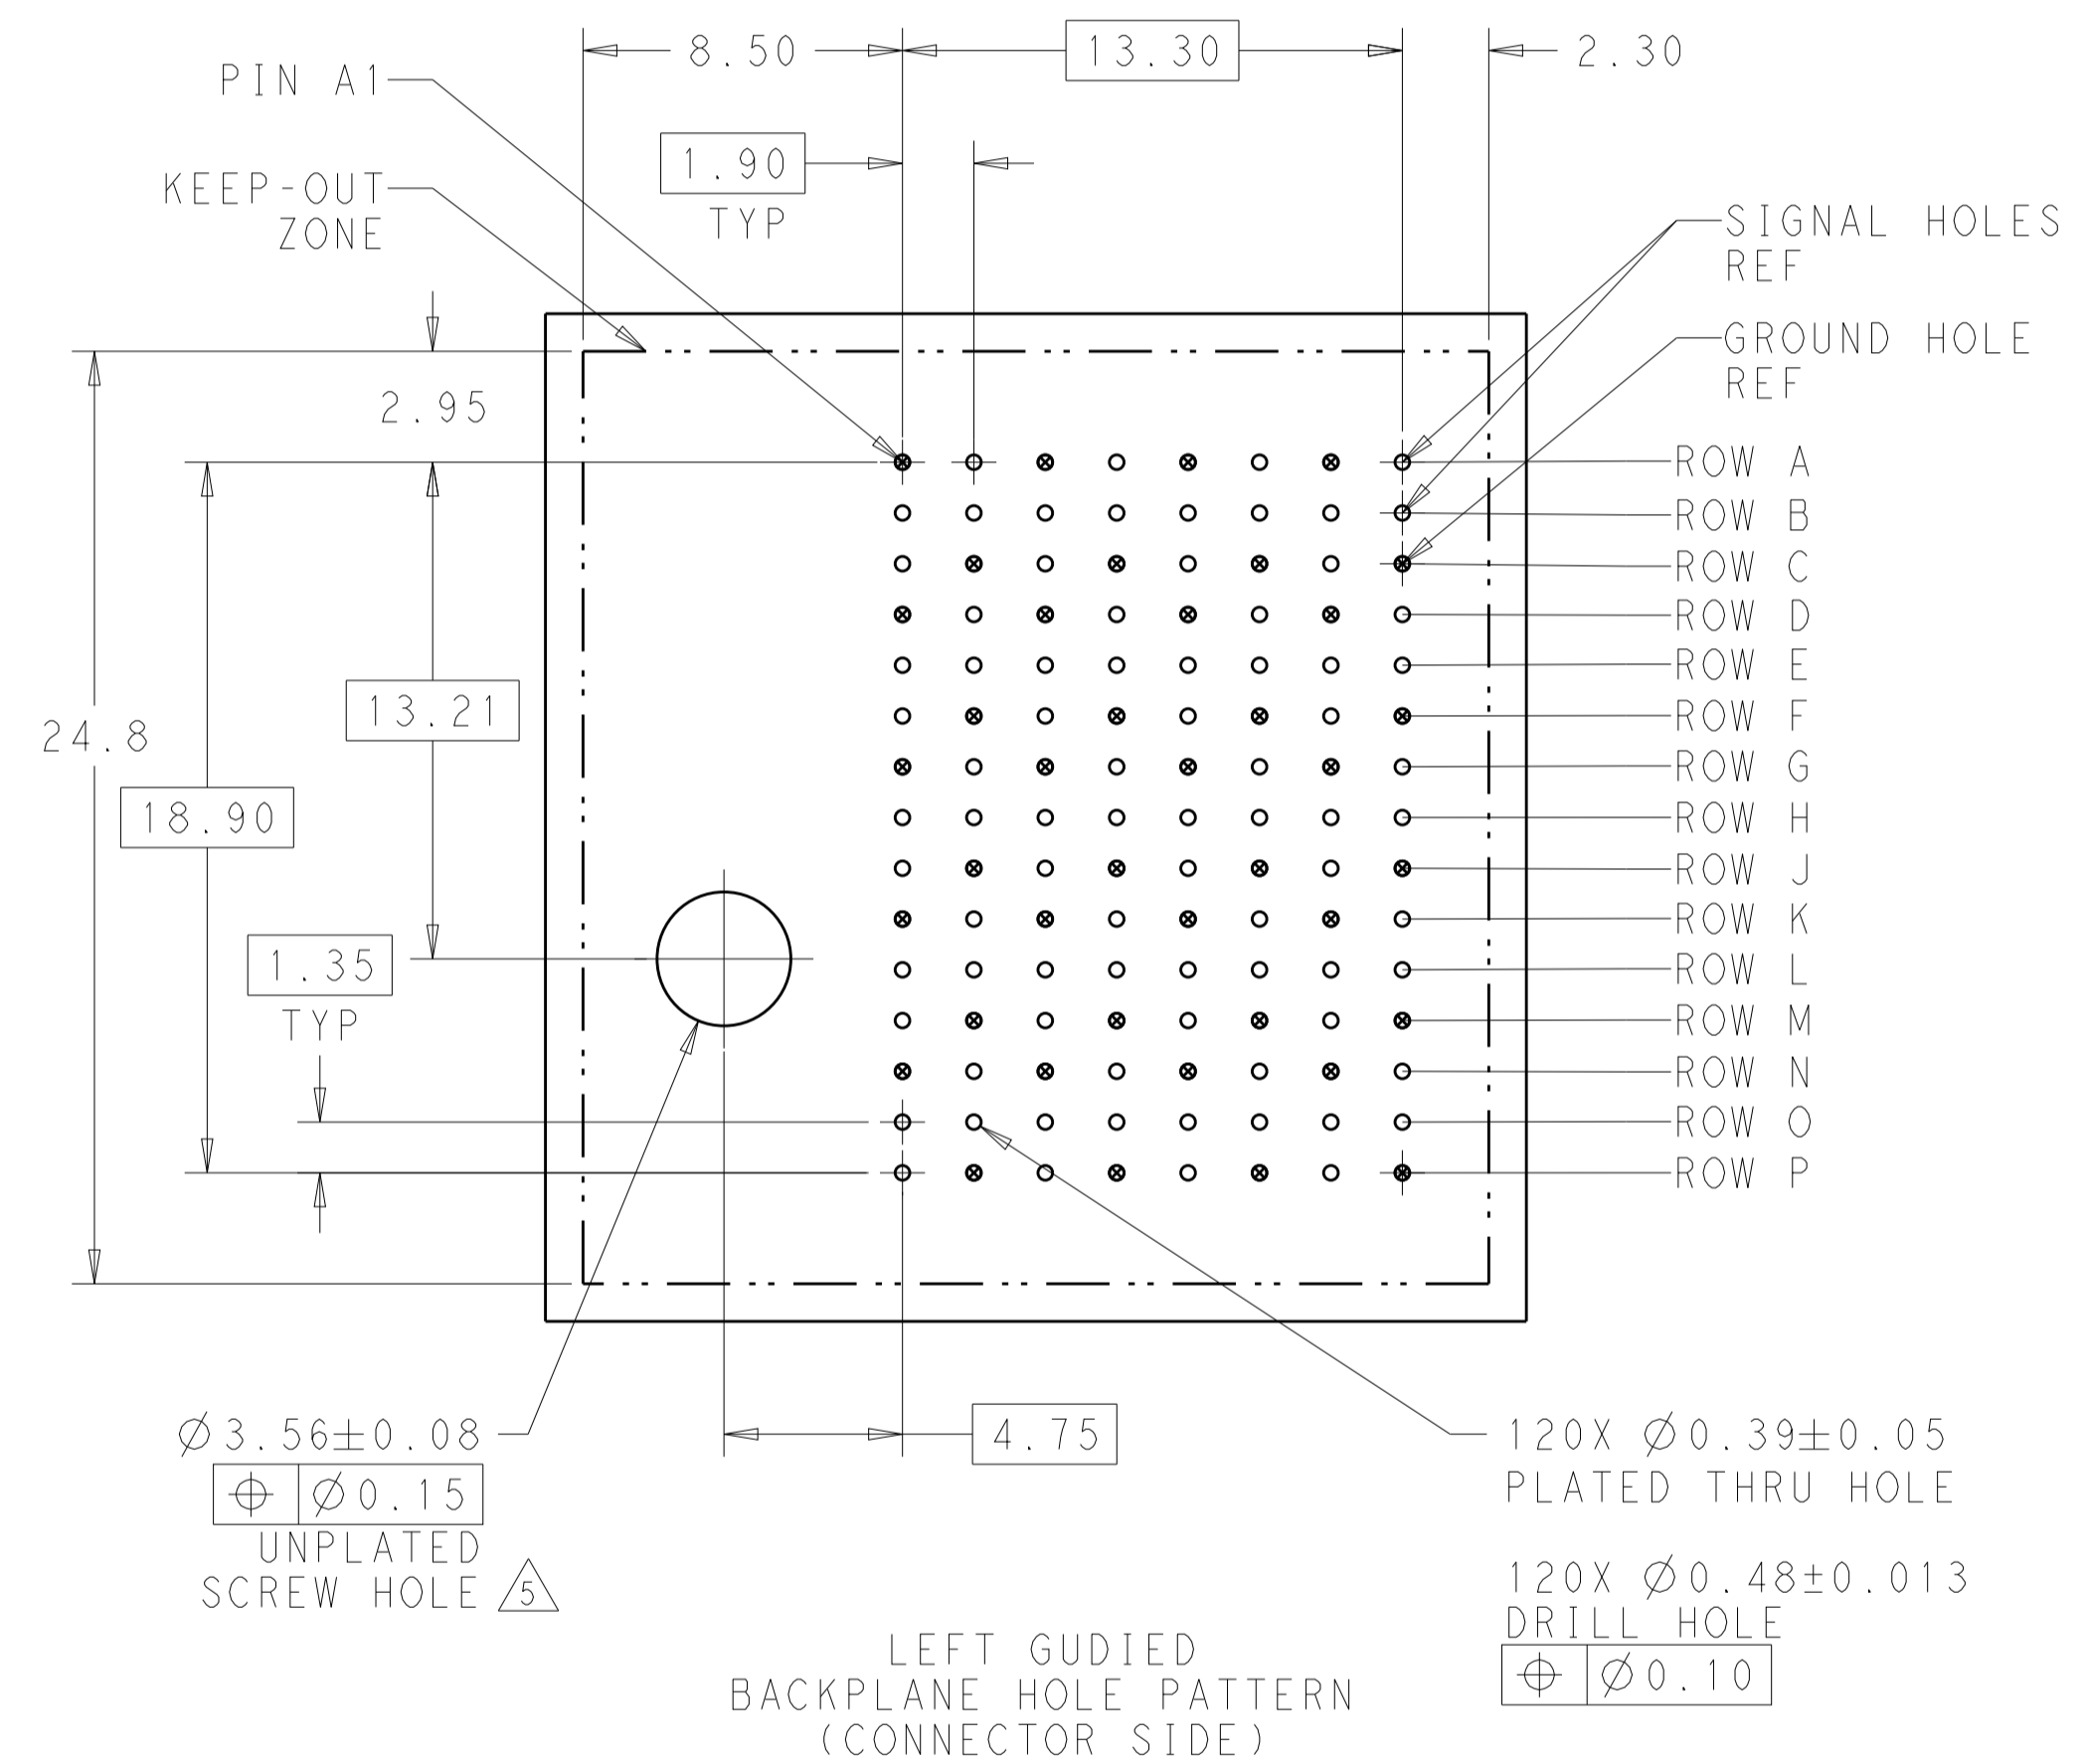

LEFT GUIDED BACKPLANE HOLE PATTERN (CONNECTOR SIDE)

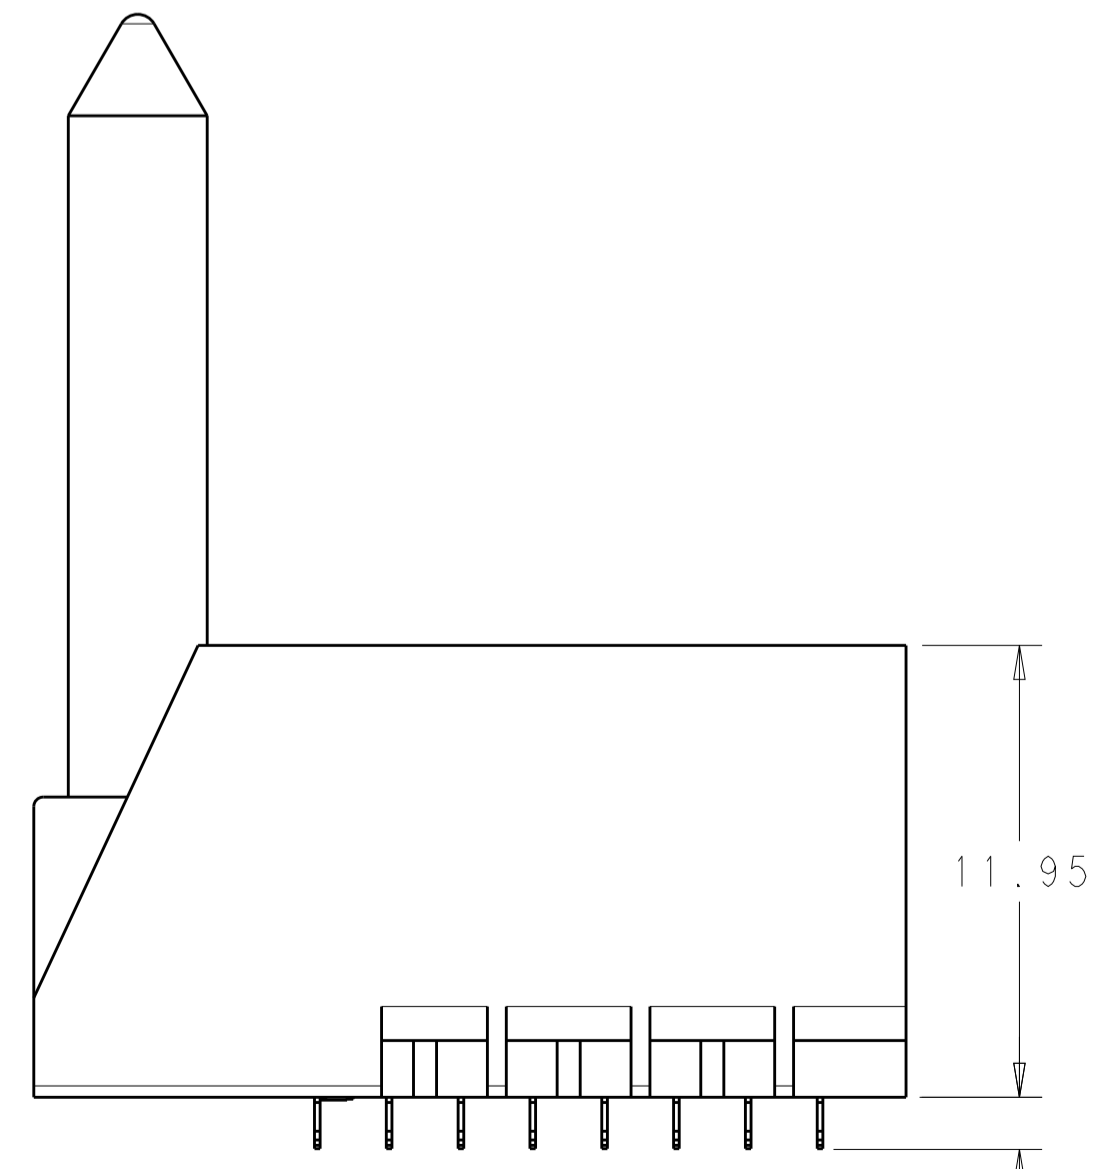

1.4 TAIL LENGTH

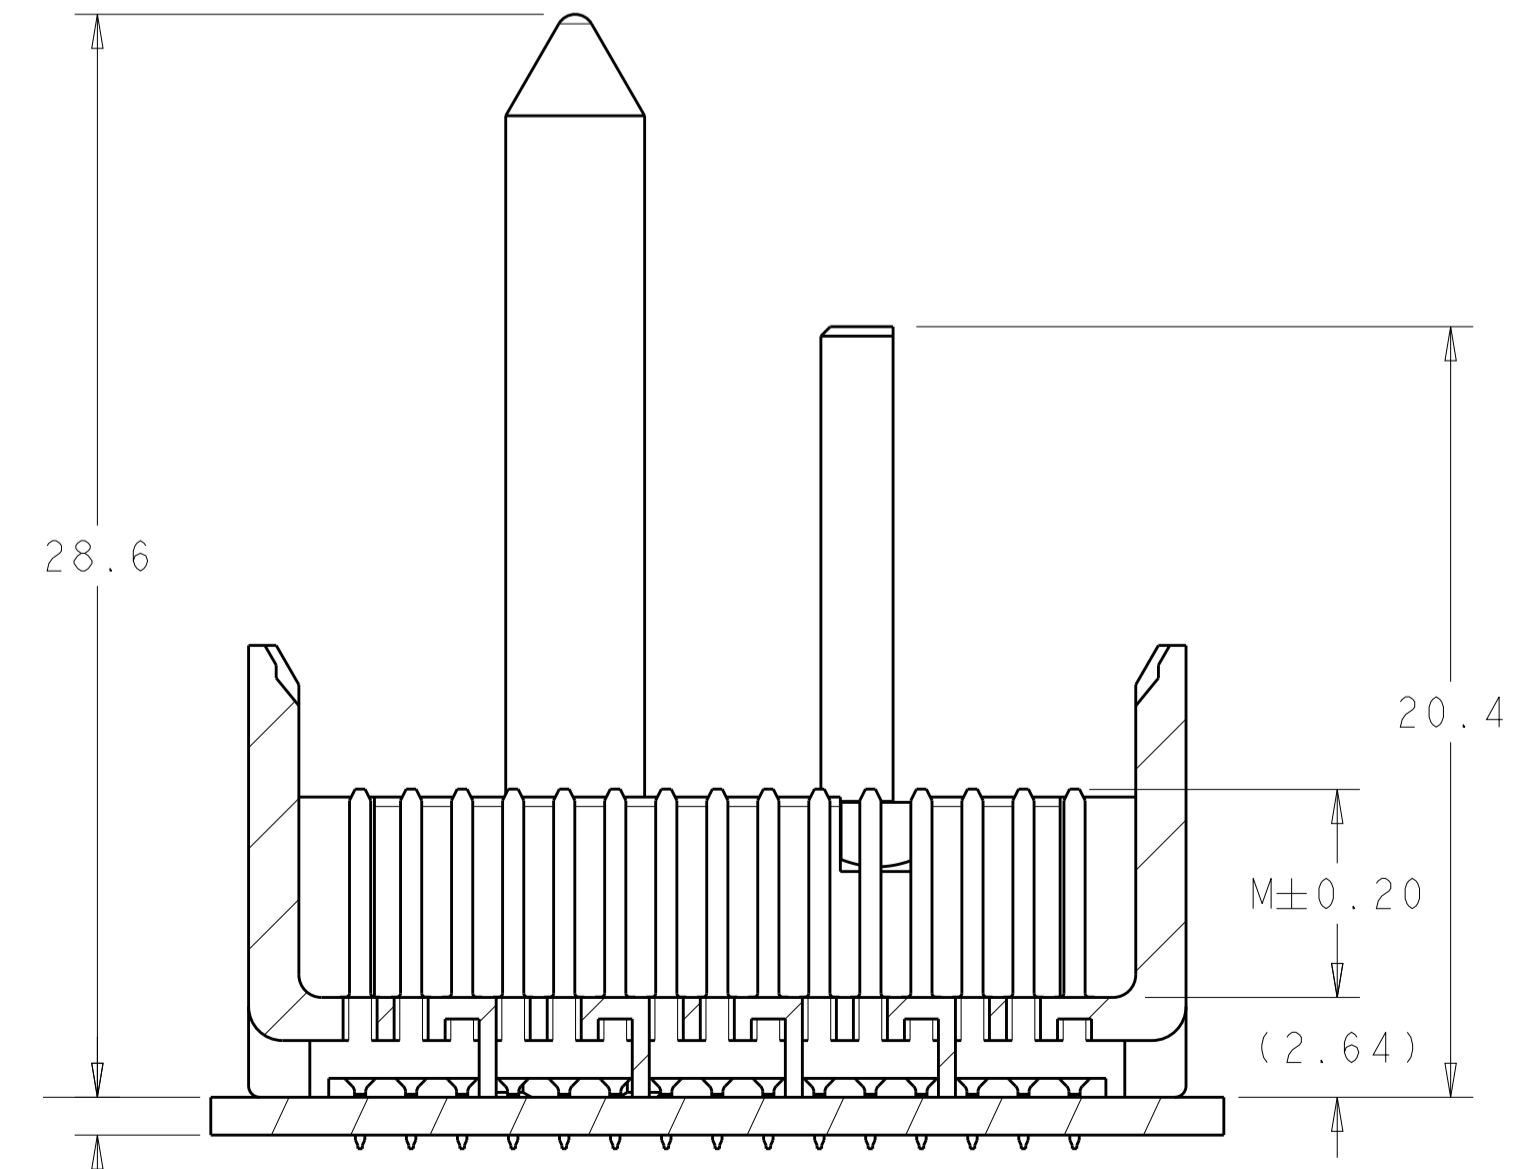


SECTION A-A

1.00 MINIMUM BOARD THICKNESS

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COELLO 03JUN2011	TE Connectivity
DIMENSIONS: mm		CHK J. EARY 03JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 03JUN2011	NAME: IMPACT, 5 PAIR, 8 COLUMN, HEADER LEFT GUIDED, RIGHT END WALL SIGNAL MODULE, 0.39 PTH
0 PLC ±0.25		PRODUCT SPEC	
1 PLC ±0.13		APPLICATION SPEC	SIZE: CAGE CODE DRAWING NO: A100779C=2057771
2 PLC ±0.10		RESTRICTED TO	
3 PLC ±0.08		WEIGHT	SCALE: 5:1 SHEET 1 OF 2 REV A
4 PLC ±0.05		CUSTOMER DRAWING	
ANGLES			
FINISH SEE TABLE			

LOC	DIST	P	LTN	DESCRIPTION	DATE	DWN	APVD
AD	00	-	-	SEE SHEET 1	-	-	-

3	H	5.5	8-2057771-6
3	H	4.9	8-2057771-5
3	H	4.5	8-2057771-4
2	H	5.5	8-2057771-3
2	H	4.9	8-2057771-2
2	H	4.5	8-2057771-1
3	G	5.5	7-2057771-6
3	G	4.9	7-2057771-5
3	G	4.5	7-2057771-4
2	G	5.5	7-2057771-3
2	G	4.9	7-2057771-2
2	G	4.5	7-2057771-1
3	F	5.5	6-2057771-6
3	F	4.9	6-2057771-5
3	F	4.5	6-2057771-4
2	F	5.5	6-2057771-3
2	F	4.9	6-2057771-2
2	F	4.5	6-2057771-1
3	E	5.5	5-2057771-6
3	E	4.9	5-2057771-5
3	E	4.5	5-2057771-4
2	E	5.5	5-2057771-3
2	E	4.9	5-2057771-2
2	E	4.5	5-2057771-1
3	D	5.5	4-2057771-6
3	D	4.9	4-2057771-5
3	D	4.5	4-2057771-4
2	D	5.5	4-2057771-3
2	D	4.9	4-2057771-2
2	D	4.5	4-2057771-1
3	C	5.5	3-2057771-6
3	C	4.9	3-2057771-5
3	C	4.5	3-2057771-4
2	C	5.5	3-2057771-3
2	C	4.9	3-2057771-2
2	C	4.5	3-2057771-1
3	B	5.5	2-2057771-6
3	B	4.9	2-2057771-5
3	B	4.5	2-2057771-4
2	B	5.5	2-2057771-3
2	B	4.9	2-2057771-2
2	B	4.5	2-2057771-1
3	A	5.5	1-2057771-6
3	A	4.9	1-2057771-5
3	A	4.5	1-2057771-4
2	A	5.5	1-2057771-3
2	A	4.9	1-2057771-2
2	A	4.5	1-2057771-1
3	-	5.5	2057771-6
3	-	4.9	2057771-5
3	-	4.5	2057771-4
2	-	5.5	2057771-3
2	-	4.9	2057771-2
2	-	4.5	2057771-1
FINISH	KEY POSITION	DIM M	PART NUMBER

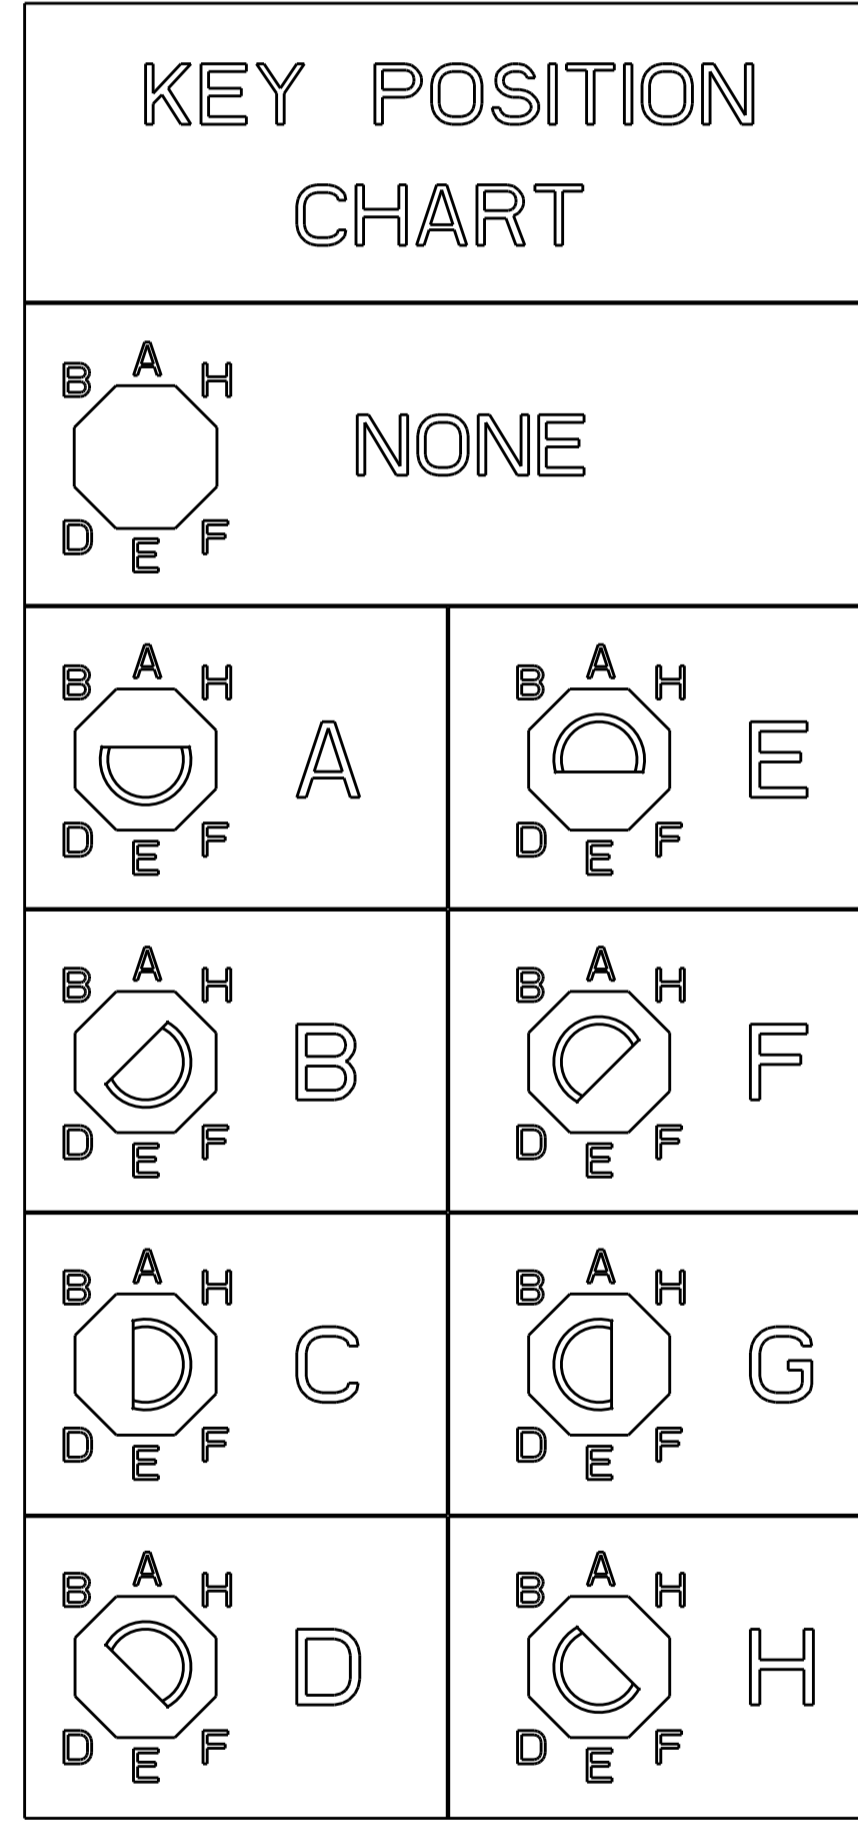

REFER TO WWW.TE.COM  
FOR PRODUCT AVAILABILITY

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COELLO 03JUN2011	<b>TE</b> Connectivity
DIMENSIONS: mm		CHK J. EARY 03JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD J. EARY 03JUN2011	
0 PLC ± 1 PLC ±0.25 2 PLC ±0.13 3 PLC ± 4 PLC ± ANGLES ± FINISH SEE TABLE		NAME IMPACT, 5 PAIR, 8 COLUMN, HEADER LEFT GUIDED, RIGHT END WALL SIGNAL MODULE, 0.39 PTH PRODUCT SPEC APPLICATION SPEC SIZE CAGE CODE DRAWING NO. RESTRICTED TO A100779C=2057771 WEIGHT CUSTOMER DRAWING SCALE 5:1 SHEET 2 OF 2 REV A	