




LOC	DIST	REVISIONS			
P	LTN	DESCRIPTION	DATE	DWN	APVD
A		CREATED BY AUTOMATION PROGRAM	03JUN2011	RKC	JE

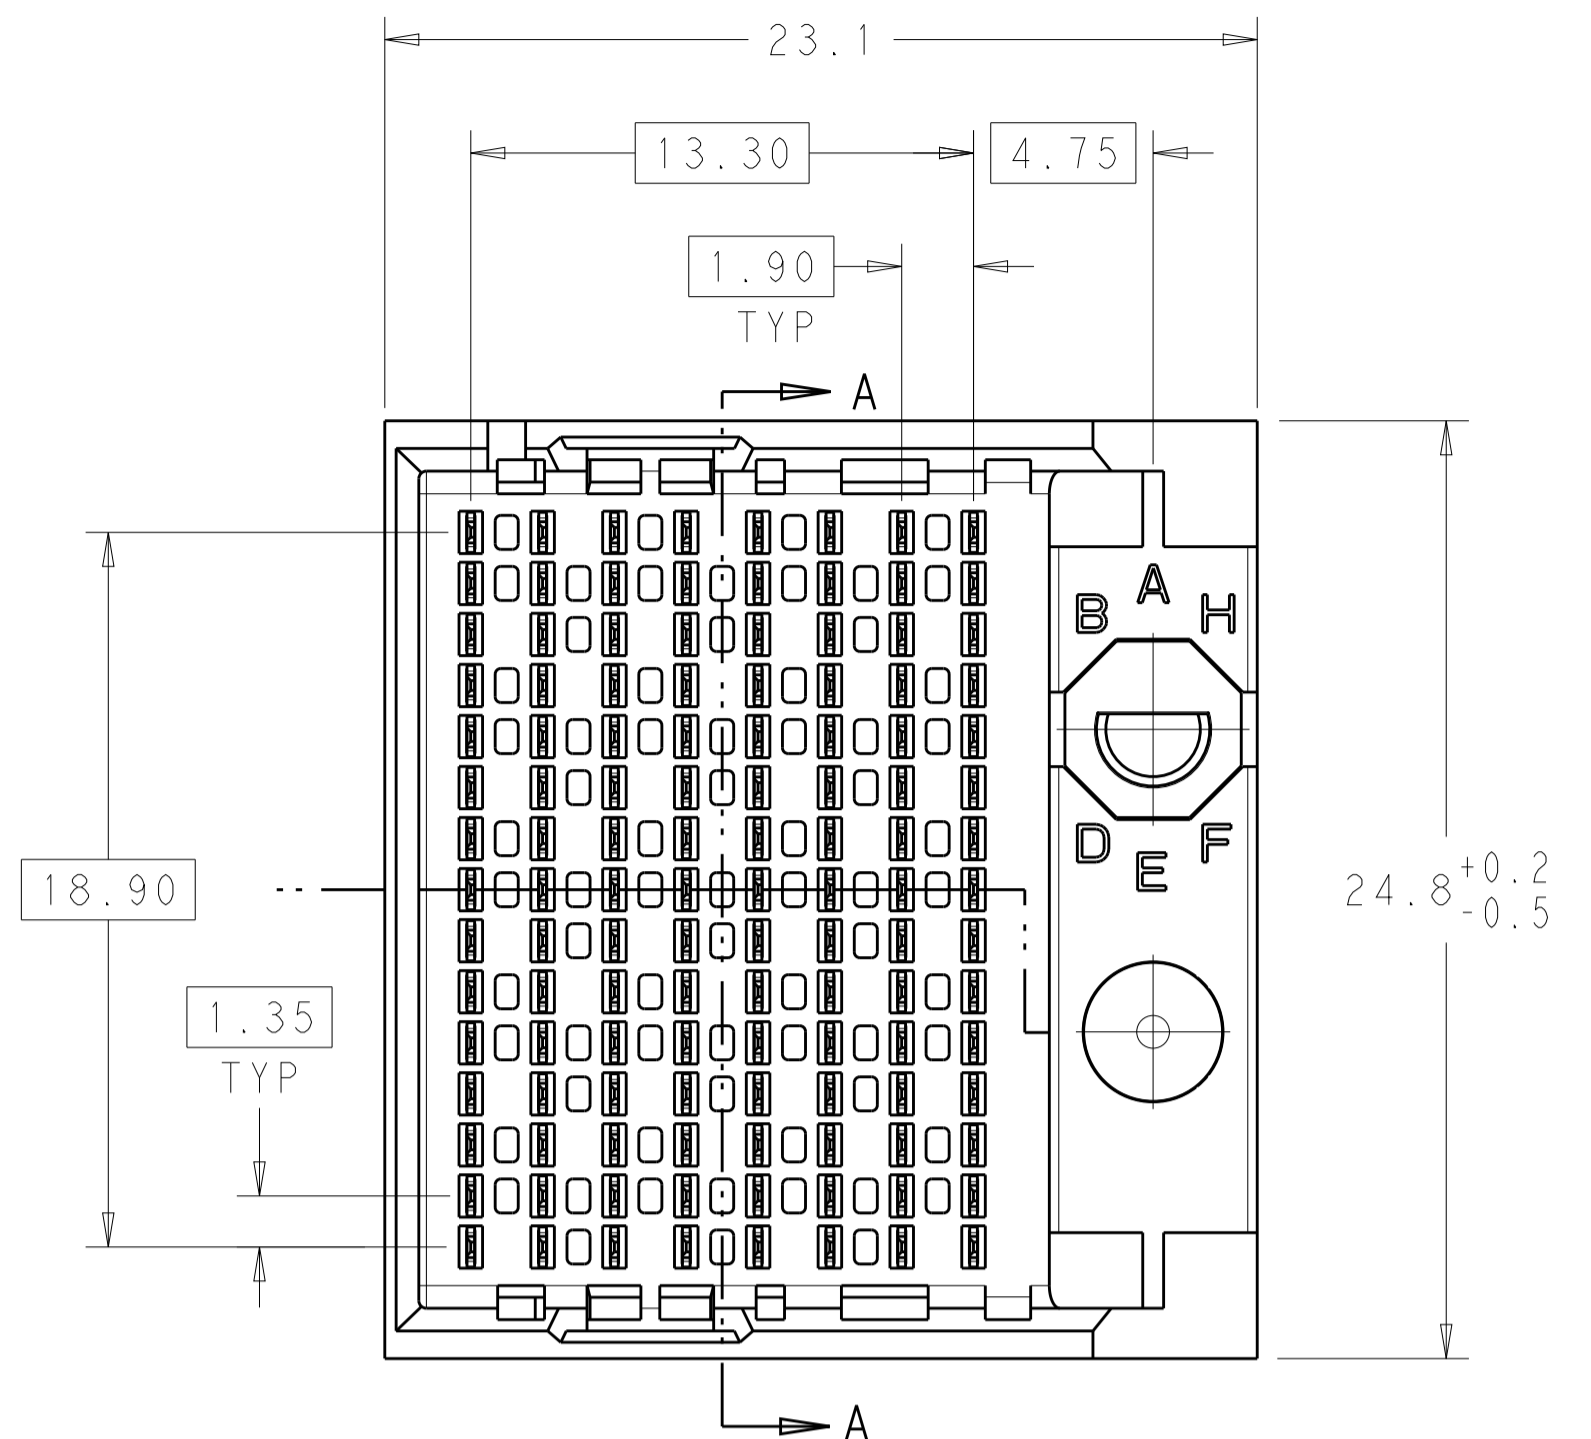

NOTCH DESIGNATES ROW A


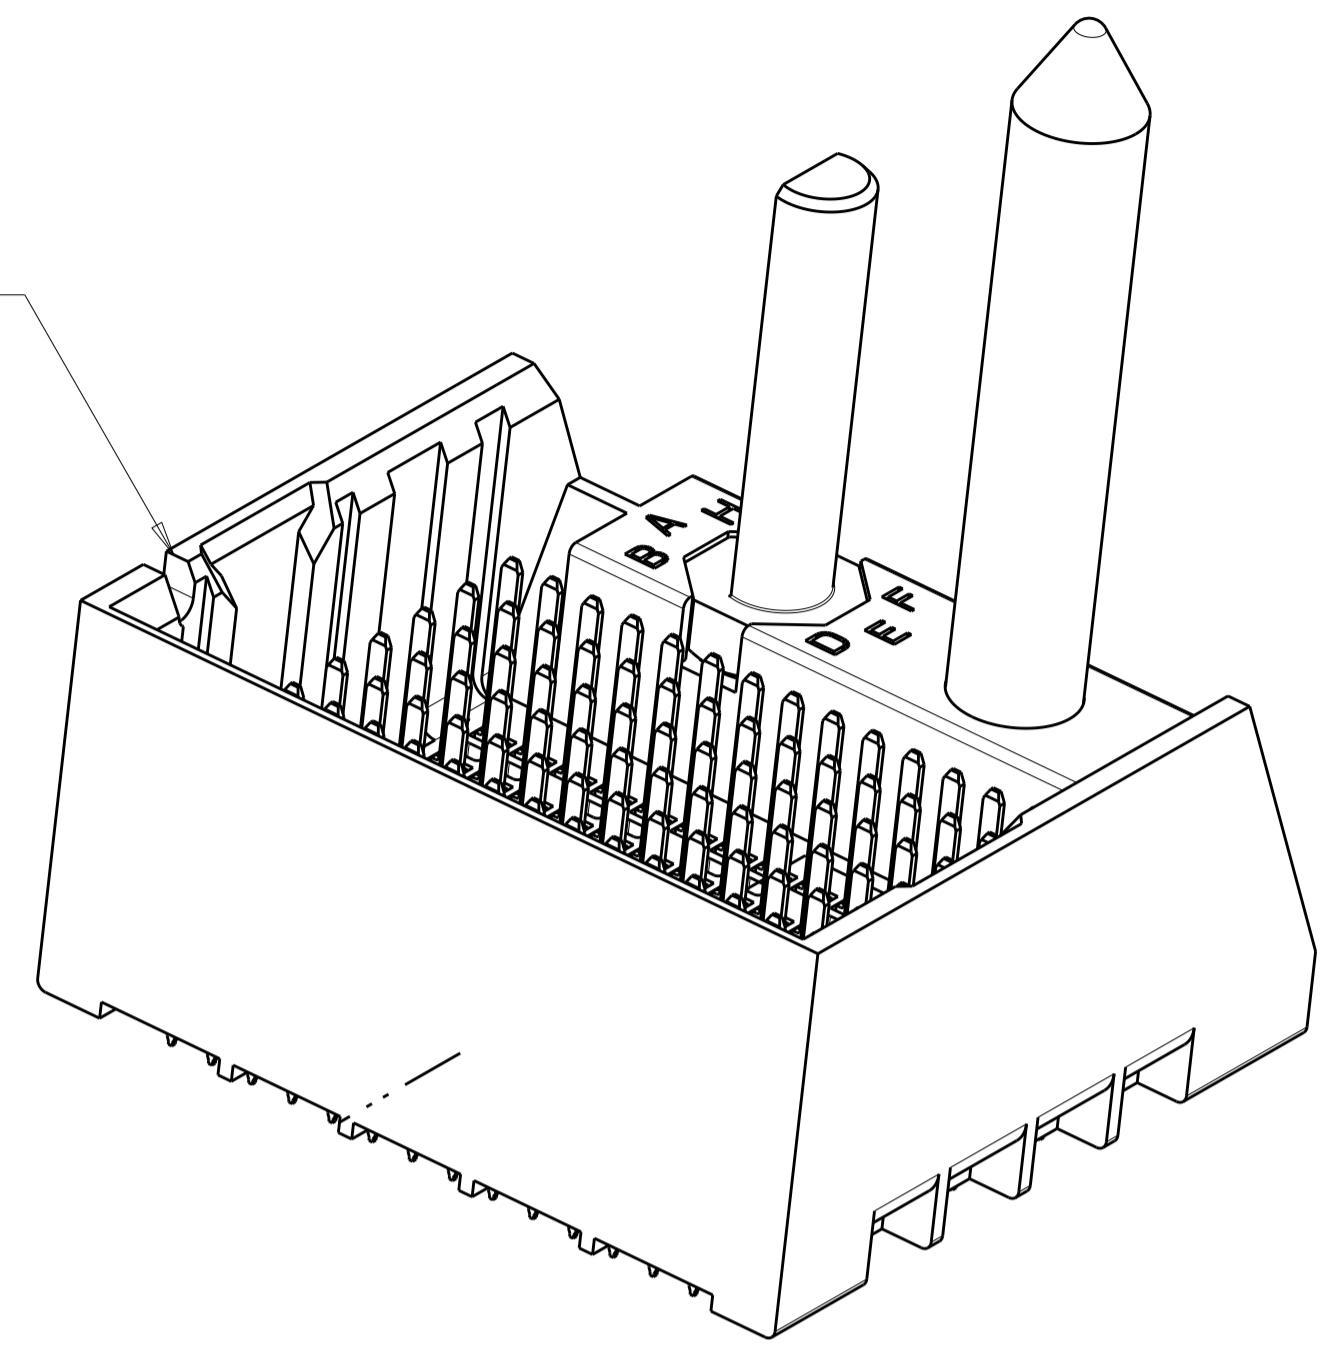


- 1. MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2. FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3. FINISH:
30μ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN-LEAD ON PCB TAILS, NICKEL OVERALL.
- 4. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 5. FOR GROUNDED GUIDE PIN USE $\varnothing 3.56 \pm 0.08$ PTH, $\varnothing 3.66$ DRILL, AND $\varnothing 6.5$ PAD.
- 6. KEYING PIN SHOWN IN POSITION A, SEE KEYING CHART ON SHEET 2 FOR OTHER POSITIONS.

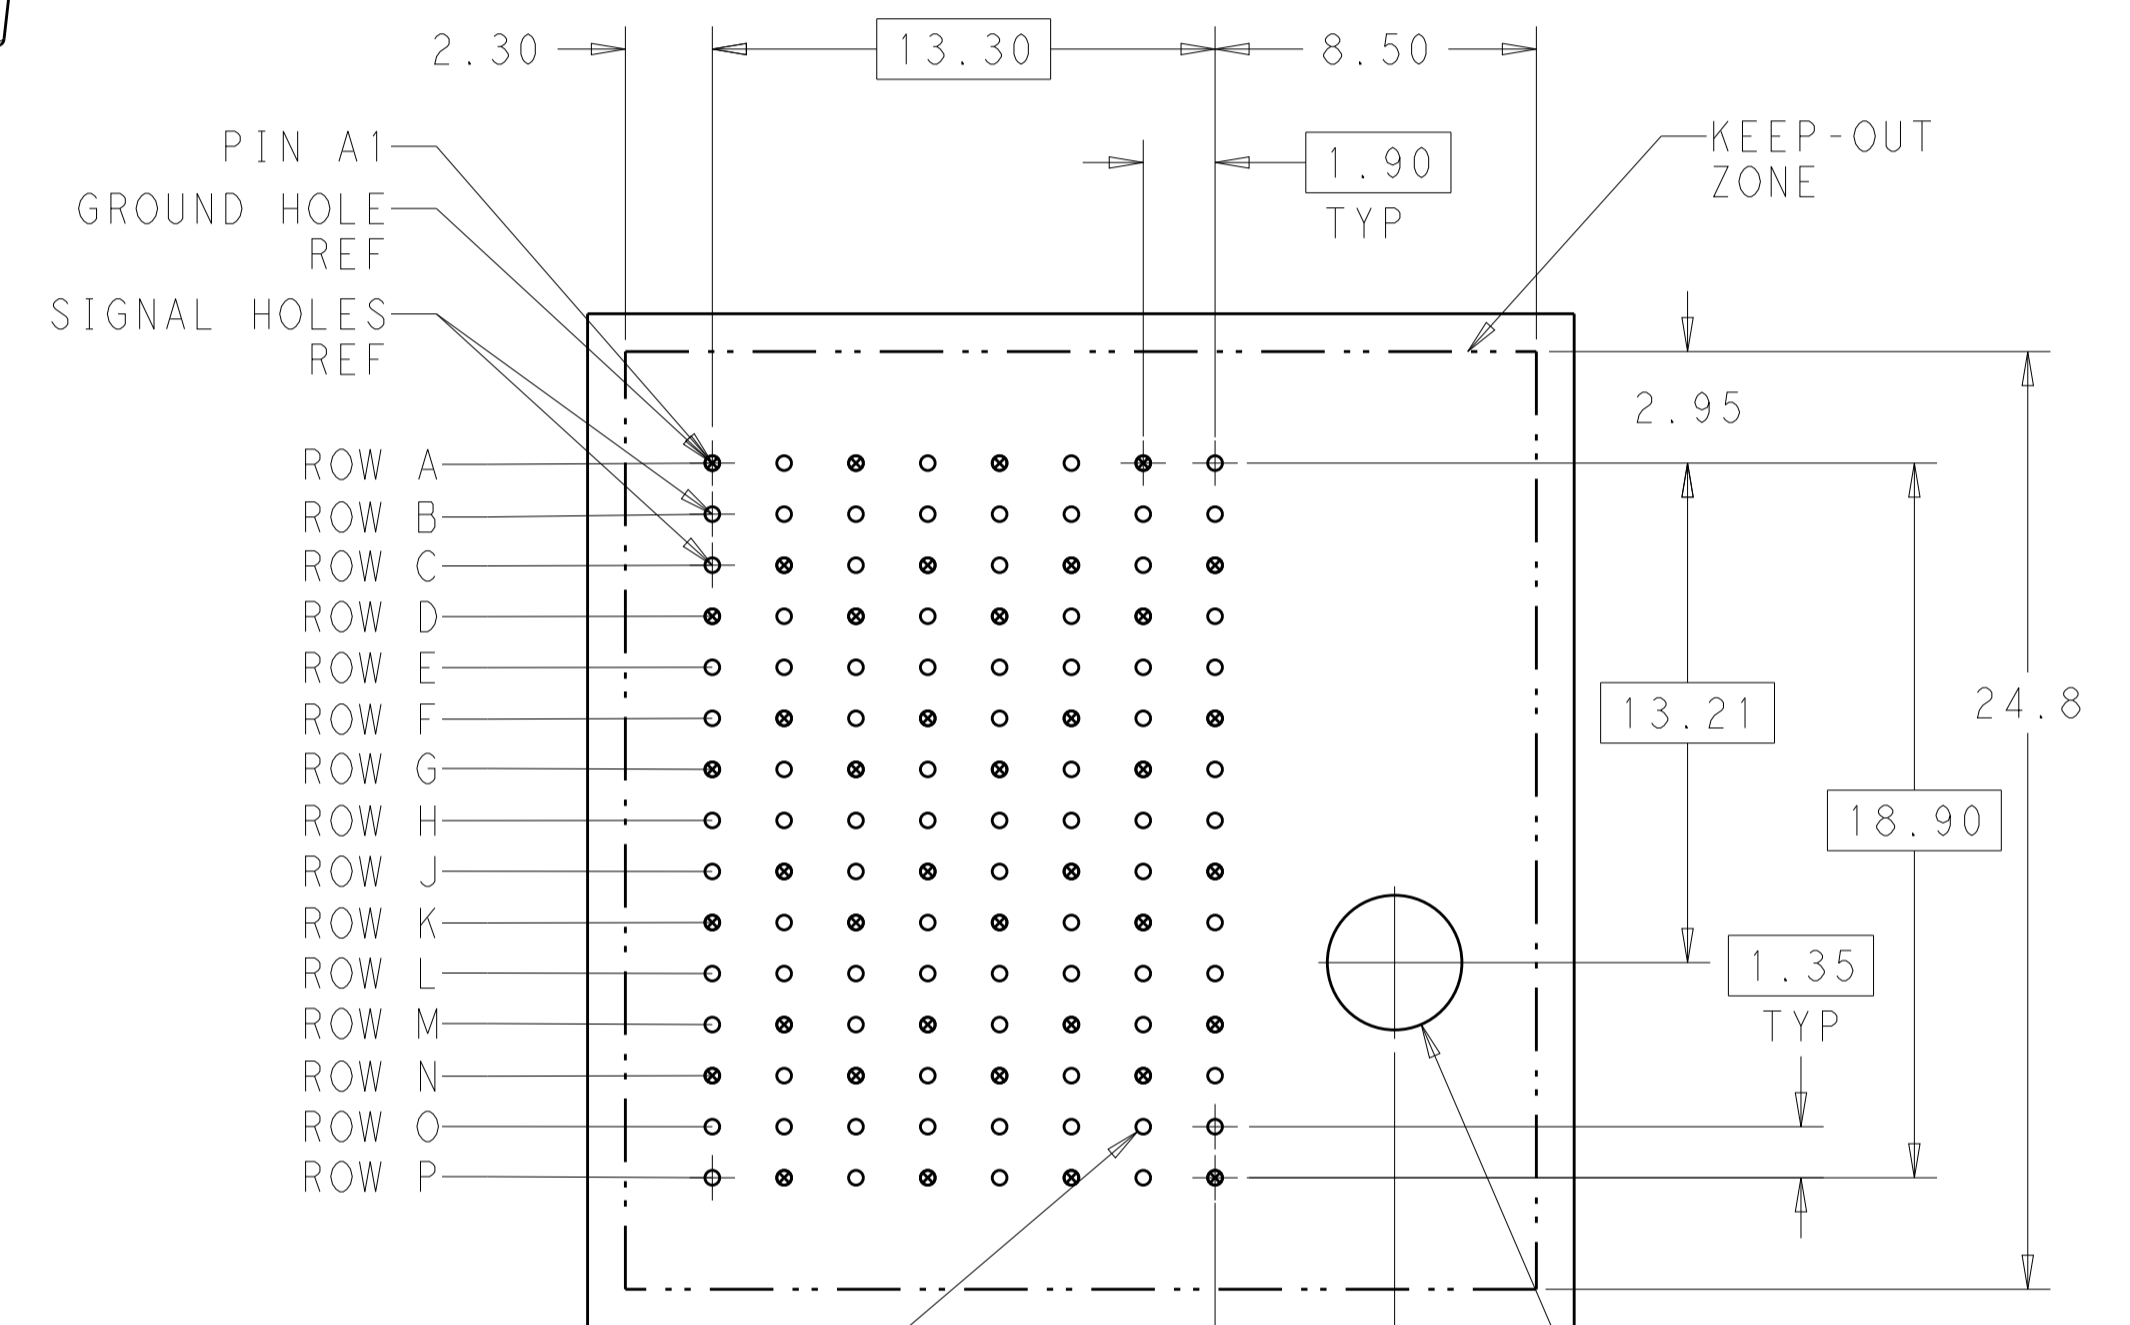

120X $\varnothing 0.39 \pm 0.05$ PLATED THRU HOLE
 120X $\varnothing 0.48 \pm 0.013$ DRILL HOLE $\varnothing 0.10$
 $\varnothing 3.56 \pm 0.08$ UNPLATED SCREW HOLE $\varnothing 0.15$

RIGHT GUIDED BACKPLANE HOLE PATTERN (CONNECTOR SIDE)

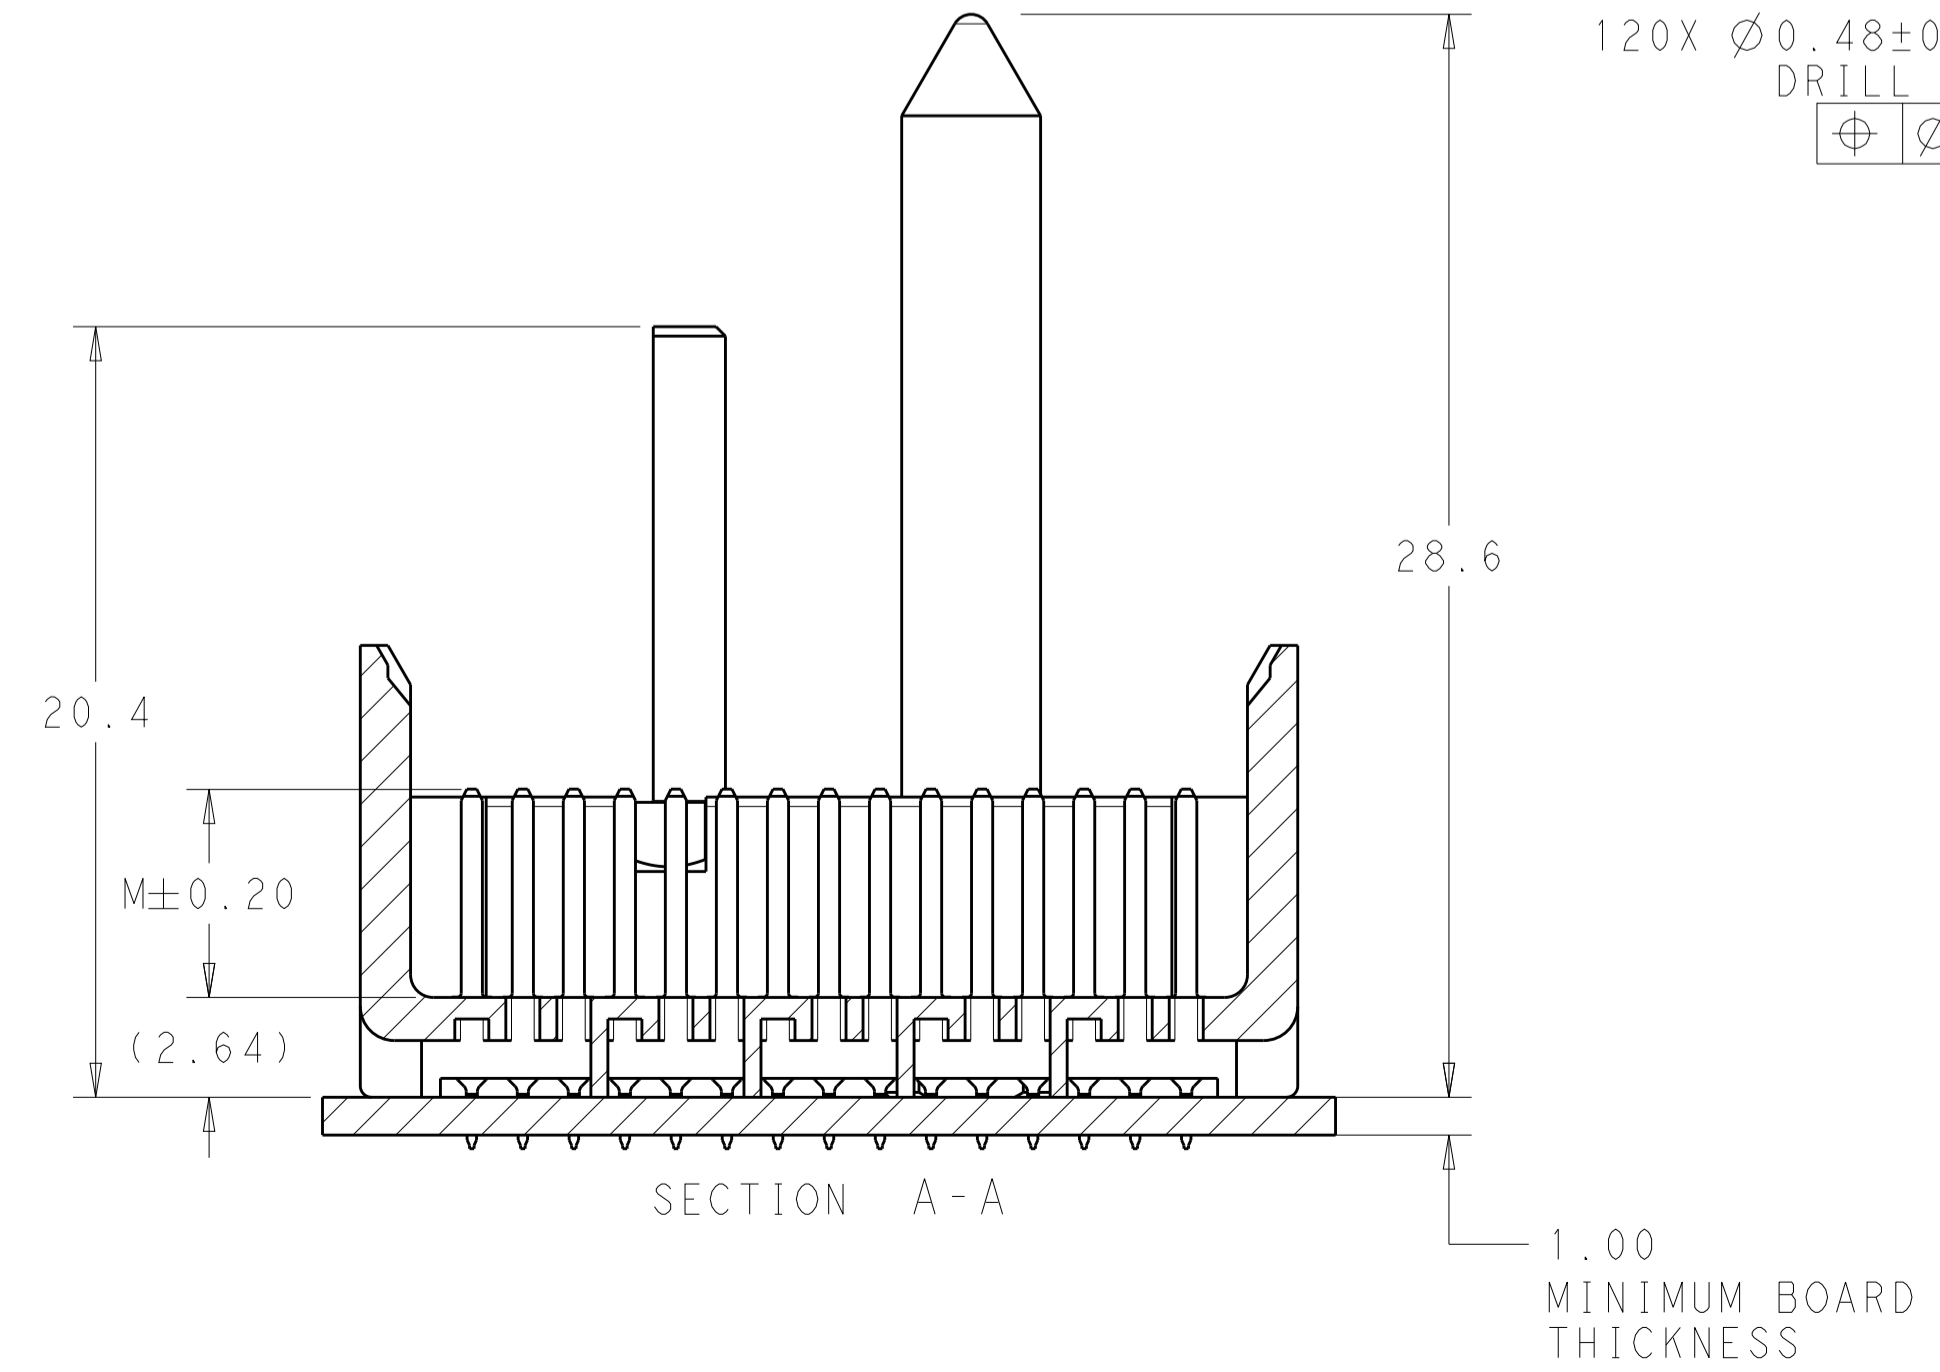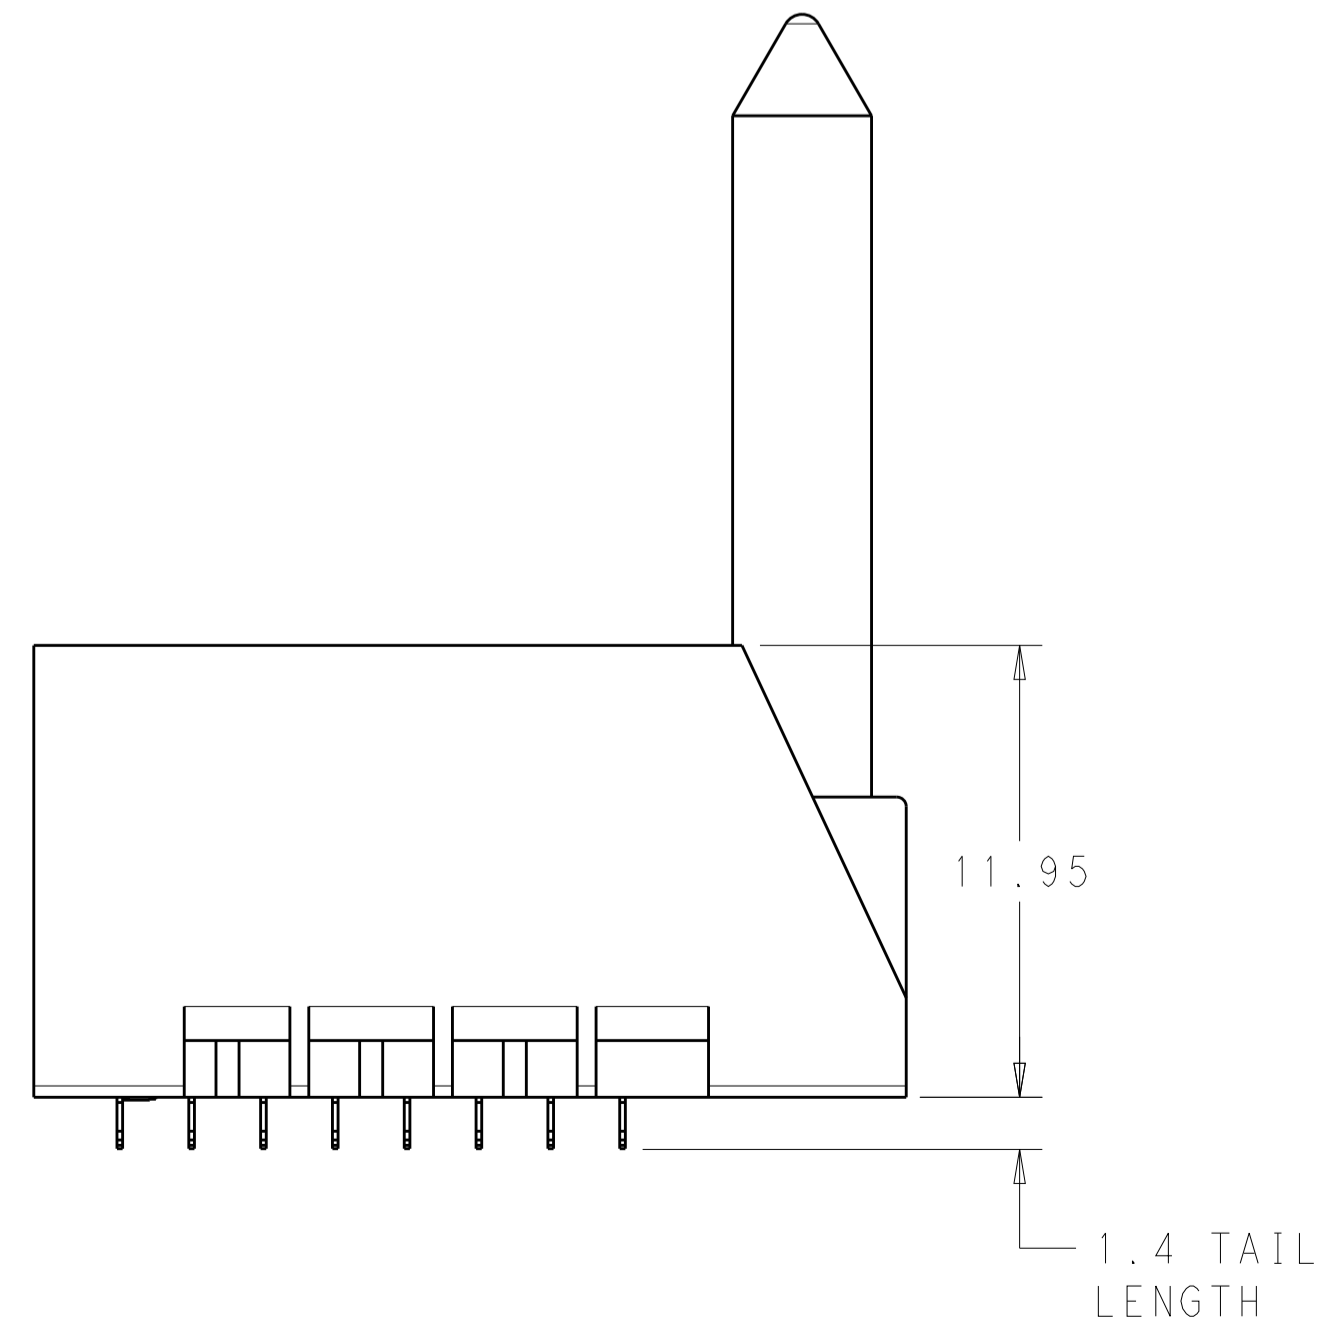


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN: 02JUN2011	TE Connectivity
DIMENSIONS: mm		CHK: J. EARY 02JUN2011	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD: J. EARY 02JUN2011	NAME: IMPACT, 5 PAIR, 8 COLUMN, HEADER
0 PLC	±	PRODUCT SPEC	RIGHT GUIDED, LEFT END WALL
1 PLC	±0.25	APPLICATION SPEC	SIGNAL MODULE, 0.39 PTH
2 PLC	±0.13	SIZE	A100779C=2057775
3 PLC	±	WEIGHT	RESTRICTED TO
4 PLC	±	CUSTOMER DRAWING	SCALE: 5:1 SHEET 1 OF 2 REV A
ANGLES	±		
FINISH	SEE TABLE		

LOC	DIST	P	LTN	DESCRIPTION	DATE	DWN	APVD
AD	00	-	-	SEE SHEET 1	-	-	-

3	H	5.5	8-2057775-6
3	H	4.9	8-2057775-5
3	H	4.5	8-2057775-4
2	H	5.5	8-2057775-3
2	H	4.9	8-2057775-2
2	H	4.5	8-2057775-1
3	G	5.5	7-2057775-6
3	G	4.9	7-2057775-5
3	G	4.5	7-2057775-4
2	G	5.5	7-2057775-3
2	G	4.9	7-2057775-2
2	G	4.5	7-2057775-1
3	F	5.5	6-2057775-6
3	F	4.9	6-2057775-5
3	F	4.5	6-2057775-4
2	F	5.5	6-2057775-3
2	F	4.9	6-2057775-2
2	F	4.5	6-2057775-1
3	E	5.5	5-2057775-6
3	E	4.9	5-2057775-5
3	E	4.5	5-2057775-4
2	E	5.5	5-2057775-3
2	E	4.9	5-2057775-2
2	E	4.5	5-2057775-1
3	D	5.5	4-2057775-6
3	D	4.9	4-2057775-5
3	D	4.5	4-2057775-4
2	D	5.5	4-2057775-3
2	D	4.9	4-2057775-2
2	D	4.5	4-2057775-1
3	C	5.5	3-2057775-6
3	C	4.9	3-2057775-5
3	C	4.5	3-2057775-4
2	C	5.5	3-2057775-3
2	C	4.9	3-2057775-2
2	C	4.5	3-2057775-1
3	B	5.5	2-2057775-6
3	B	4.9	2-2057775-5
3	B	4.5	2-2057775-4
2	B	5.5	2-2057775-3
2	B	4.9	2-2057775-2
2	B	4.5	2-2057775-1
3	A	5.5	1-2057775-6
3	A	4.9	1-2057775-5
3	A	4.5	1-2057775-4
2	A	5.5	1-2057775-3
2	A	4.9	1-2057775-2
2	A	4.5	1-2057775-1
3	-	5.5	2057775-6
3	-	4.9	2057775-5
3	-	4.5	2057775-4
2	-	5.5	2057775-3
2	-	4.9	2057775-2
2	-	4.5	2057775-1
FINISH	KEY POSITION	DIM M	PART NUMBER

REFER TO WWW.TE.COM
FOR PRODUCT AVAILABILITY

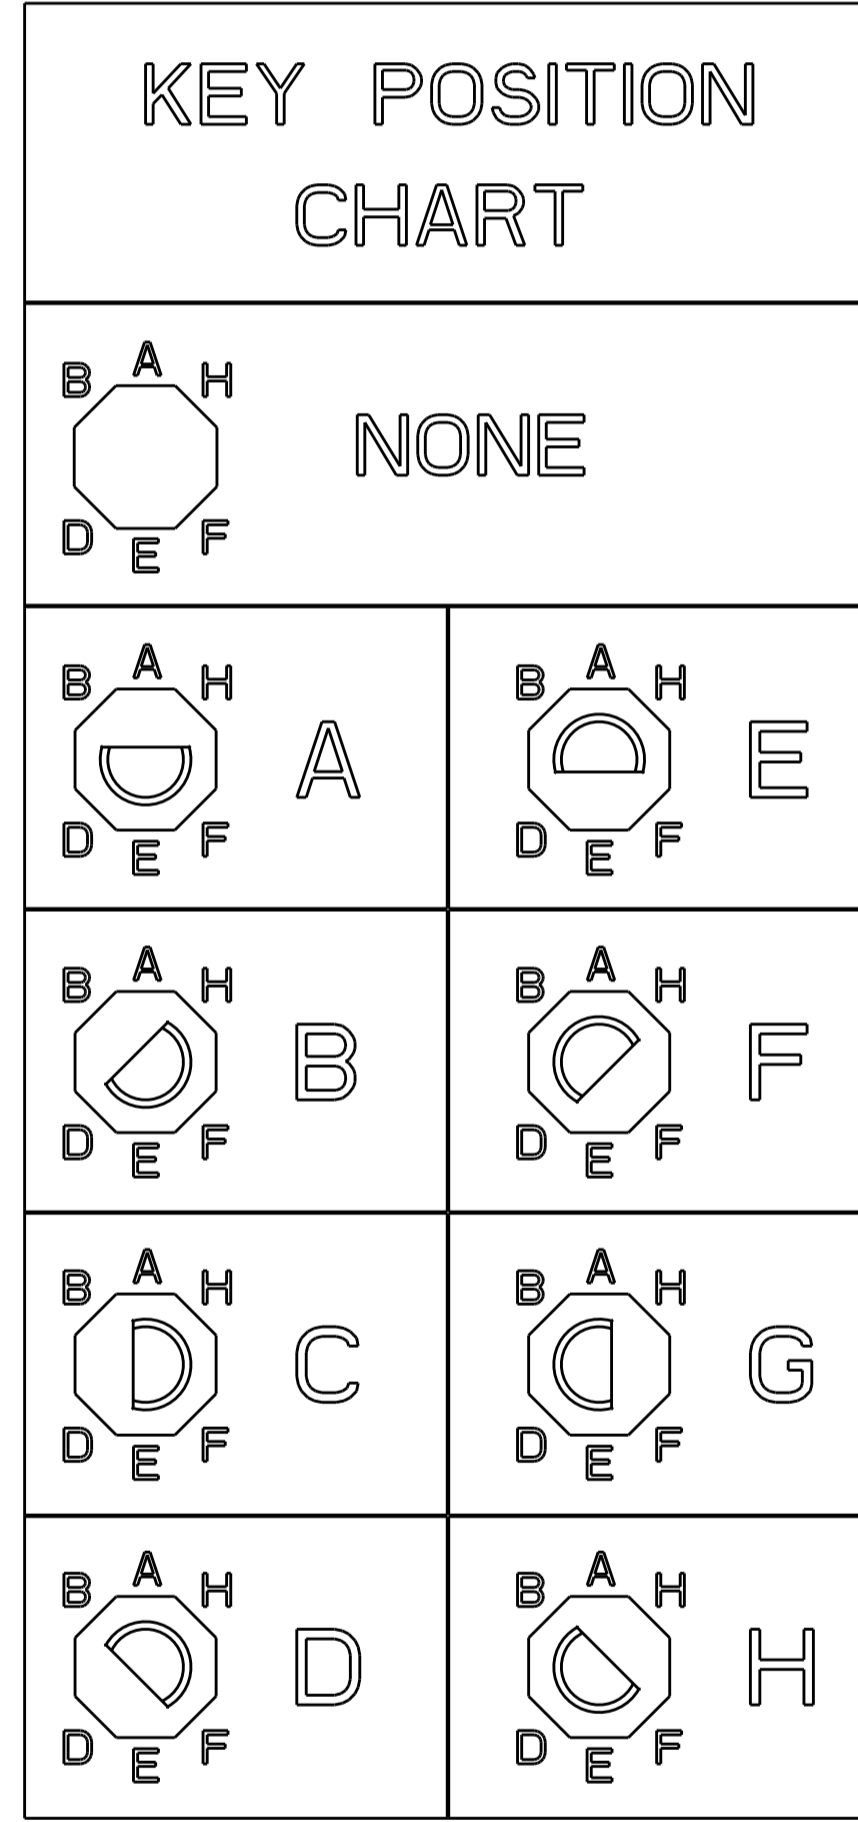

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	02JUN2011	TE Connectivity
DIMENSIONS:		CHK	02JUN2011	
mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:	APVD	02JUN2011	NAME IMPACT, 5 PAIR, 8 COLUMN, HEADER RIGHT GUIDED, LEFT END WALL SIGNAL MODULE, 0.39 PTH
0 PLC ±	0.25	PRODUCT SPEC		
1 PLC ±0.13		APPLICATION SPEC		SIZE
2 PLC ±		WEIGHT		CAGE CODE
3 PLC ±		CUSTOMER DRAWING		DRAWING NO
4 PLC ±		SCALE	5:1	SHEET
ANGLES ±		RESTRICTED TO		2
FINISH	SEE TABLE	REV	A	