



REVISIONS				DATE	DWN	APVD
P	LTR	DESCRIPTION				
B		ECR-11-004693	01APR2011	RC	AH	

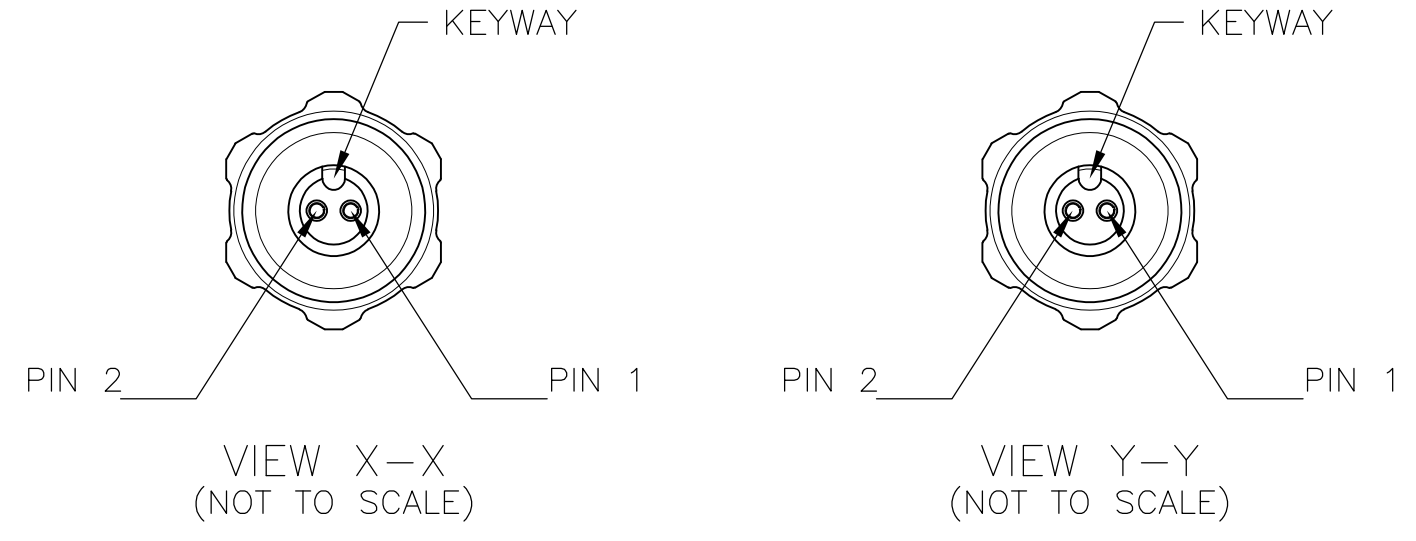

FIBER CONNECTIVITY	
LEFT PLUG	RIGHT PLUG
PIN 1	PIN 2
PIN 2	PIN 1

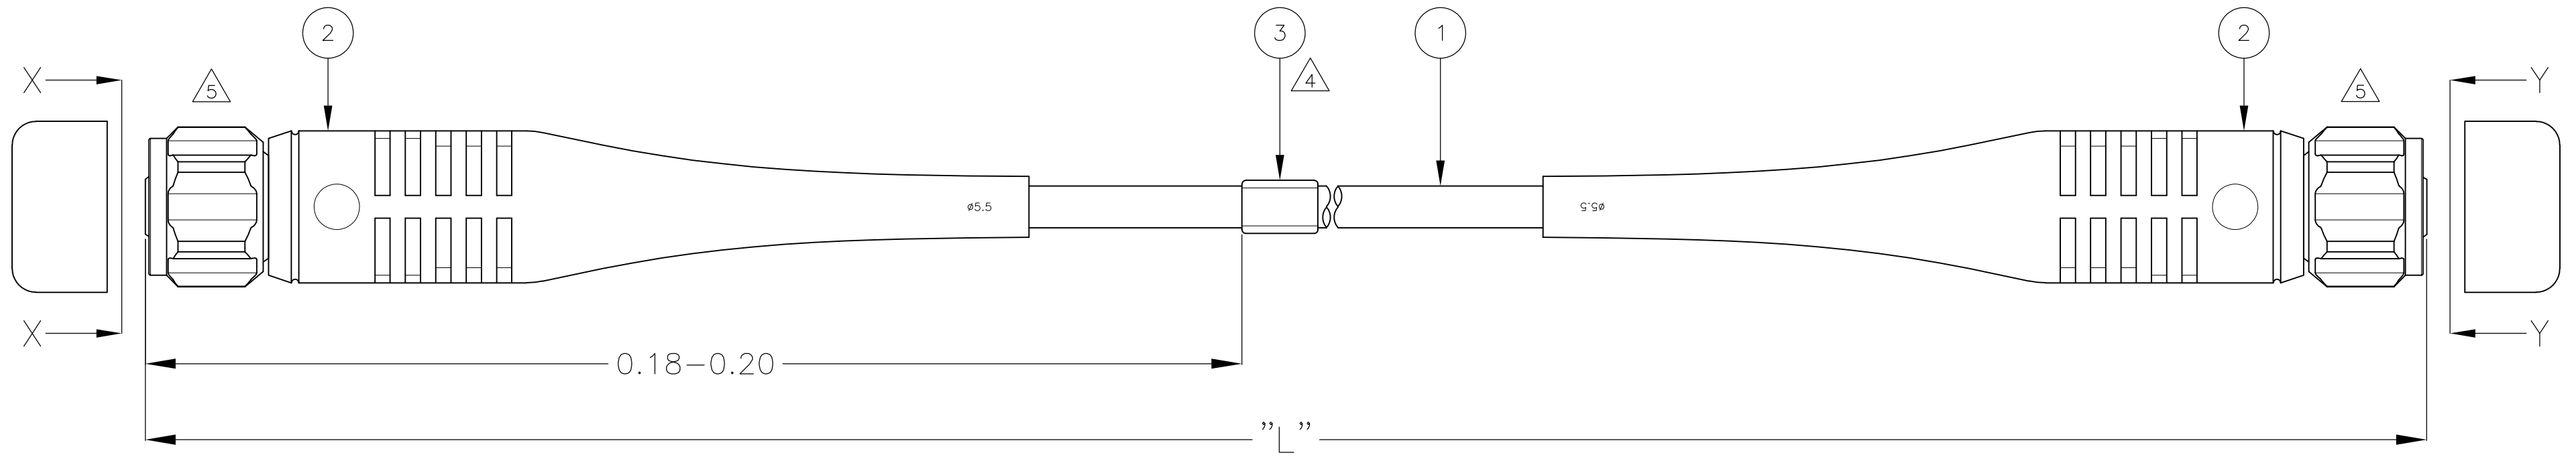

STANDARD LENGTHS ACCORDING TO CUSTOMER DRAWING 1920950	
PART NUMBER	"L" (meter) ³
X-2064661-Y	XY.0

- NOTES:**
- REFER TO TE CONNECTIVITY CUSTOMER DRAWING 2064160 FOR CABLE ASSEMBLY LOSS AND WAVELENGTHS THAT CABLE ASSEMBLY LOSS WILL BE TESTED TO
 - MINIMUM RETURN LOSS: 20 dB FOR ODC PLUG
RETURN LOSS WILL BE TESTED AT 850 nm WAVELENGTH ONLY
 - ³ STANDARD LENGTHS AND LENGTH TOLERANCE ACC. TO TE CONNECTIVITY CUSTOMER DRAWING 1920950
 - ⁴ INFORMATION ON LABEL SEE DETAIL:
 - BARCODE
 - UNIQUE SERIAL NUMBER
 - ASSEMBLY LENGTH
 - TE CONNECTIVITY PART NUMBER
 - TE CONNECTIVITY ORDER NUMBER
 - ⁵ ALLOWABLE TORQUE: 1 Nm TO 2 Nm WHEN TIGHTENING PLUG NUT

Qty	Description	Item
1	FOAC INFORMATION LABEL	3
2	FOKIT ODC PLUG ASSEMBLY, 2 FIBER, MULTI MODE, VINYL CAP	2
L	FOCAB ODC 5.5 mm 2FOLD, MULTI MODE 50/125, BLACK	1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN R. COOLEN 07APR2009	TE TE Connectivity	
DIMENSIONS: METERS		CHK A. HENGELMOLEN 07APR2009		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD A. HENGELMOLEN 07APR2009	NAME FIBER OPTIC ODC LEAD 2 FOLD PLUG - 2 FOLD PLUG MULTI MODE 50/125	
0 PLC ± -		PRODUCT SPEC	SIZE A2	
1 PLC ± -		APPLICATION SPEC	CAGE CODE 00779	
2 PLC ± -		WEIGHT	DRAWING NO C=2064661	
3 PLC ± -		FINISH	RESTRICTED TO	
4 PLC ± -			SCALE NTS	
ANGLES ± -			SHEET 1 of 1	
MATERIAL			REV B	
CUSTOMER DRAWING				

2064661