SAFETY ORGANIZATIONS

THIS FILTER HAS BEEN FORMALLY RECOGNIZED, CERTIFIED OR APPROVED BY THE LISTED AGENCY. THEREFORE, ALL TEST/REQUIREMENTS SPECIFIED IN THE LATEST REVISION OF THE FOLLOWING AGENCY STANDARDS HAVE BEEN MET:

UL RECOGNIZED: UL 1283 CSA CERTIFIED: CSA C22.2 No. 8 VDE APPROVED: EN 60939-2

OPERATING SPECIFICATIONS

LINE CURRENT/VOLTAGE: 20 AMP, 120/250 VAC, 16 AMP/40°C, 250 VAC

LINE FREQUENCY:

50-60Hz

MAXIMUM LEAKAGE CURRENT,

EACH LINE TO GROUND:

0.04mA @ 120V 60Hz 0.07mA @ 250V 50Hz

OPERATING AMBIENT TEMP. RANGE: -10°C TO +40°C @ RATED CURRENT, In.

RELIABILITY SPECIFICATIONS:

STORAGE TEMPERATURE: -40°C TO +85°C HUMIDITY: 21 DAYS € 40°C 95% RH. CURRENT OVERLOAD TEST: 6 TIMES In FOR

CUSTOMER DRAWING CATALOG # 20SRBS8-W APPRVD DATE ECN# 190CT15 15-000476 TAM

TEST SPECIFICATIONS:

INDUCTANCE; N/A

CAPACITANCE: (MEASURED @ 1KHz, 0.250VAC MAX., 25°C±1°C)

LINE TO GROUND:

470 pF±20% μF±20%

LINE TO LINE: N/A N/A Ms

DISCHARGE RESISTOR:

L/G AND L/L I.R. ND DISCHARGE RESISTOR:

6000MA (MIN.) @ 100VDC,


20°C AND 50% RH

RECOMMENDED RECEIVING INSPECTION HIPOT:

LINE TO GROUND: 1500 VAC FOR 1 MINUTE LINE TO LINE: 1450 VDC FOR 1 MINUTE

FILTER APPROVAL:

THE BEST WAY TO SELECT AND QUALIFY A FILTER IS FOR YOUR ENGINEERING TO TEST THE UNIT IN YOUR EQUIPMENT.

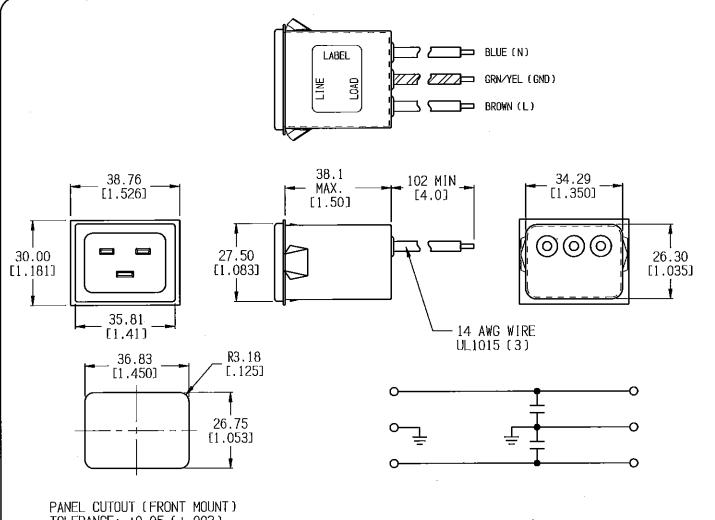

TOLERANCE: ±0.05 (±.002)

PANEL THICKNESS: 0.79-1.19 REF. (0.031-0.047)

50 \(- 50 \(\text{(MINIMUM)} \) INSERTION LOSS														PARTS SHALL COMPLY WITH TYCO ELECTRONICS 138-702 SPECIFICATION FOR HAZARDOUS SUBSTANCES	
	FREDUENCY MHz	1	5	10	50	100	300	/	/	/	/	/	/	UNLESS OTHERWISE SPECIFIED TOLERANCE TO BE ±0.64 MATERIAL & FINISH: AS SUPPLIED	ETE TE Connectivity
	COMMON dB	1	2	4	18	13	20	/	/	/	/	/	/	NOTES:	POWER LINE FILTER
	OIFF.	/	/	/	/	/	/	/	/	/	/	/	/		TE PART ND.: 6-1609152-5
	Y				THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYPO ELECTRONICS COPPORATION AND ITS YORLOVIDE SUBSIDIARIES AND MFELLATES. IT MAY NOT SE DISCLUSED TO ANYONE OTHER THAN TYPO ELECTRONICS PERSONNEL, NITHOUT WAITED AUTHORIZATION FROM TYPO ELECTRONICS CORPORATION.								KAY NOT		SCUE: 3/4 DATE: 14AUG14 DRAWING NAMER; REV. 14AUG14 20SRBS8-W 1