
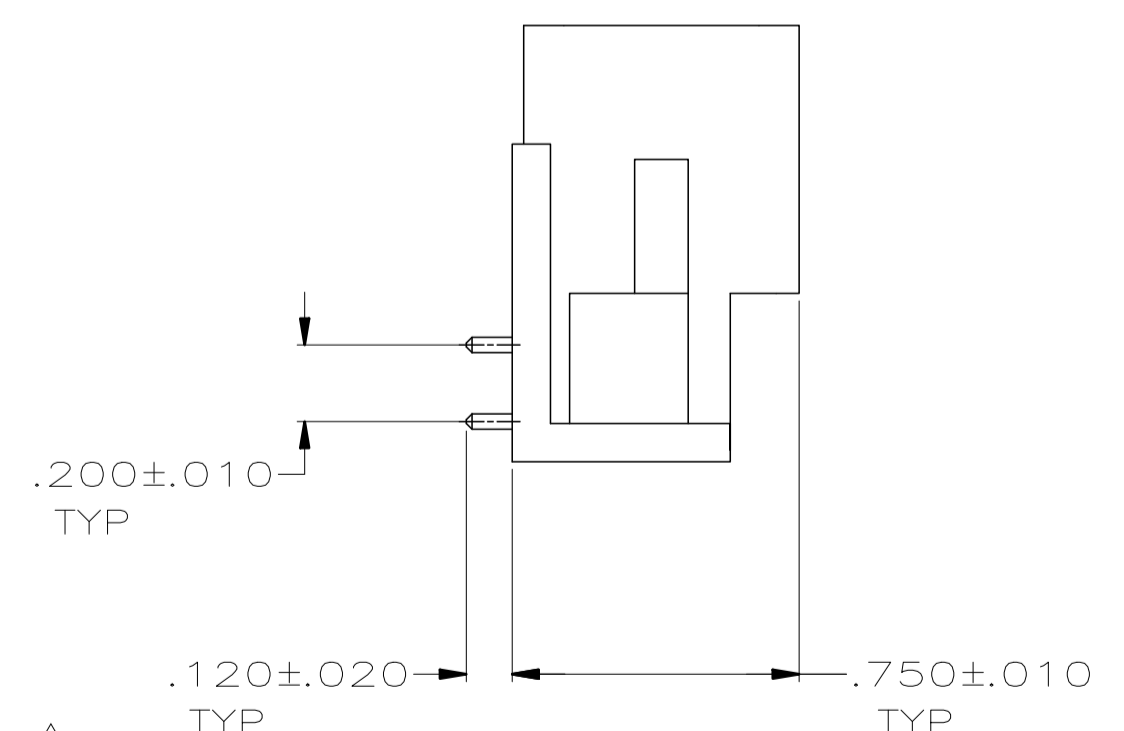
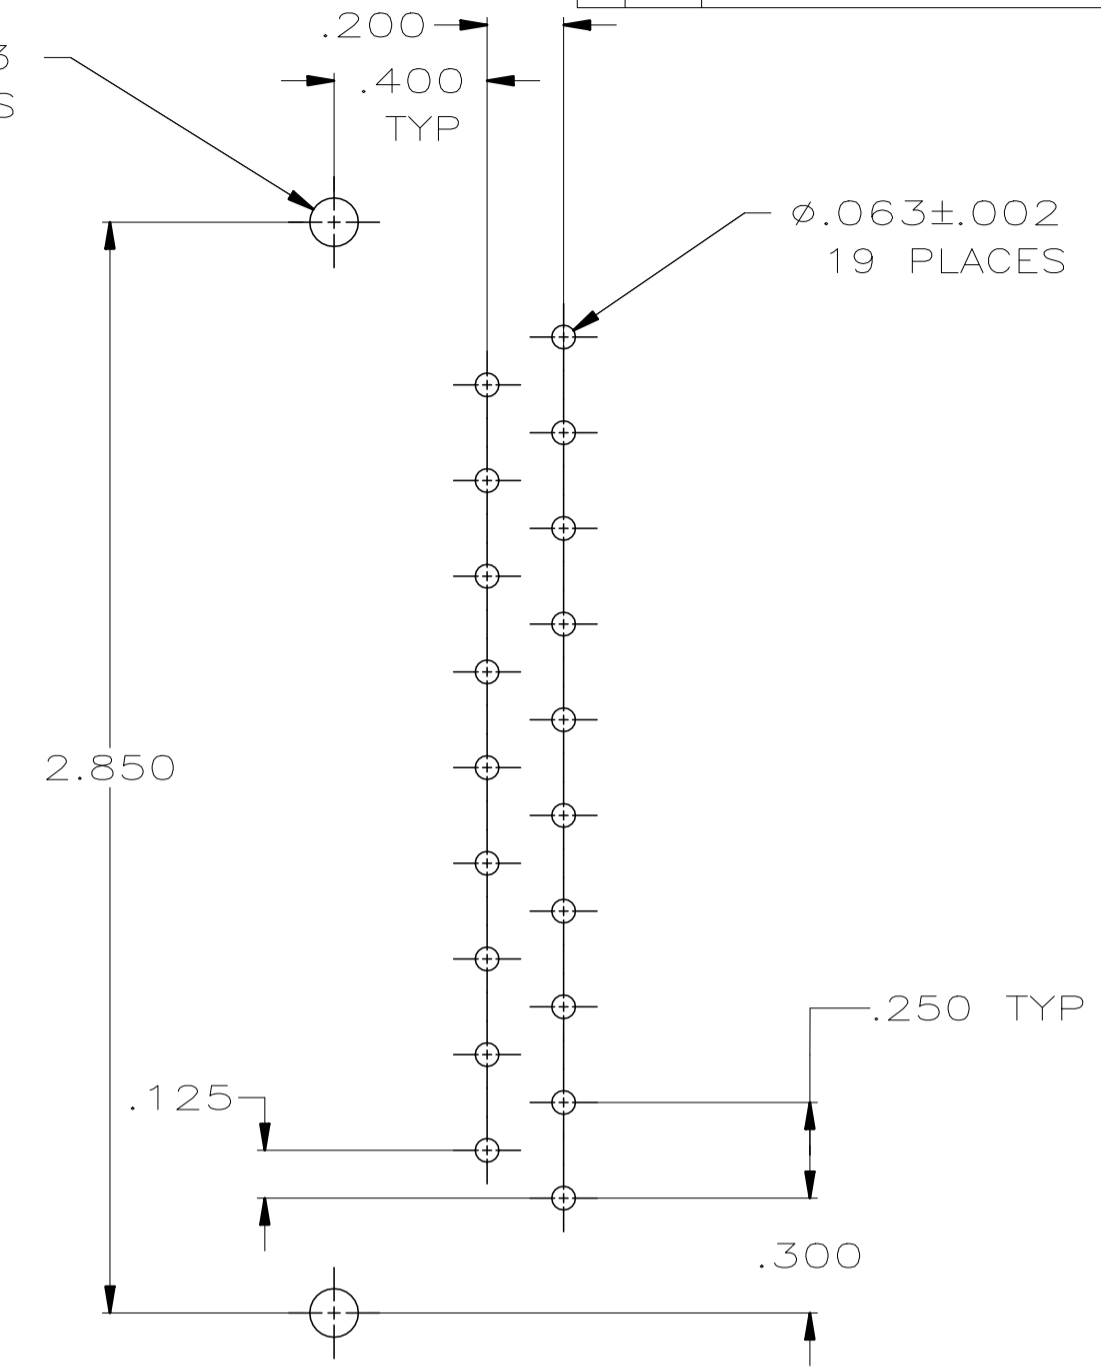
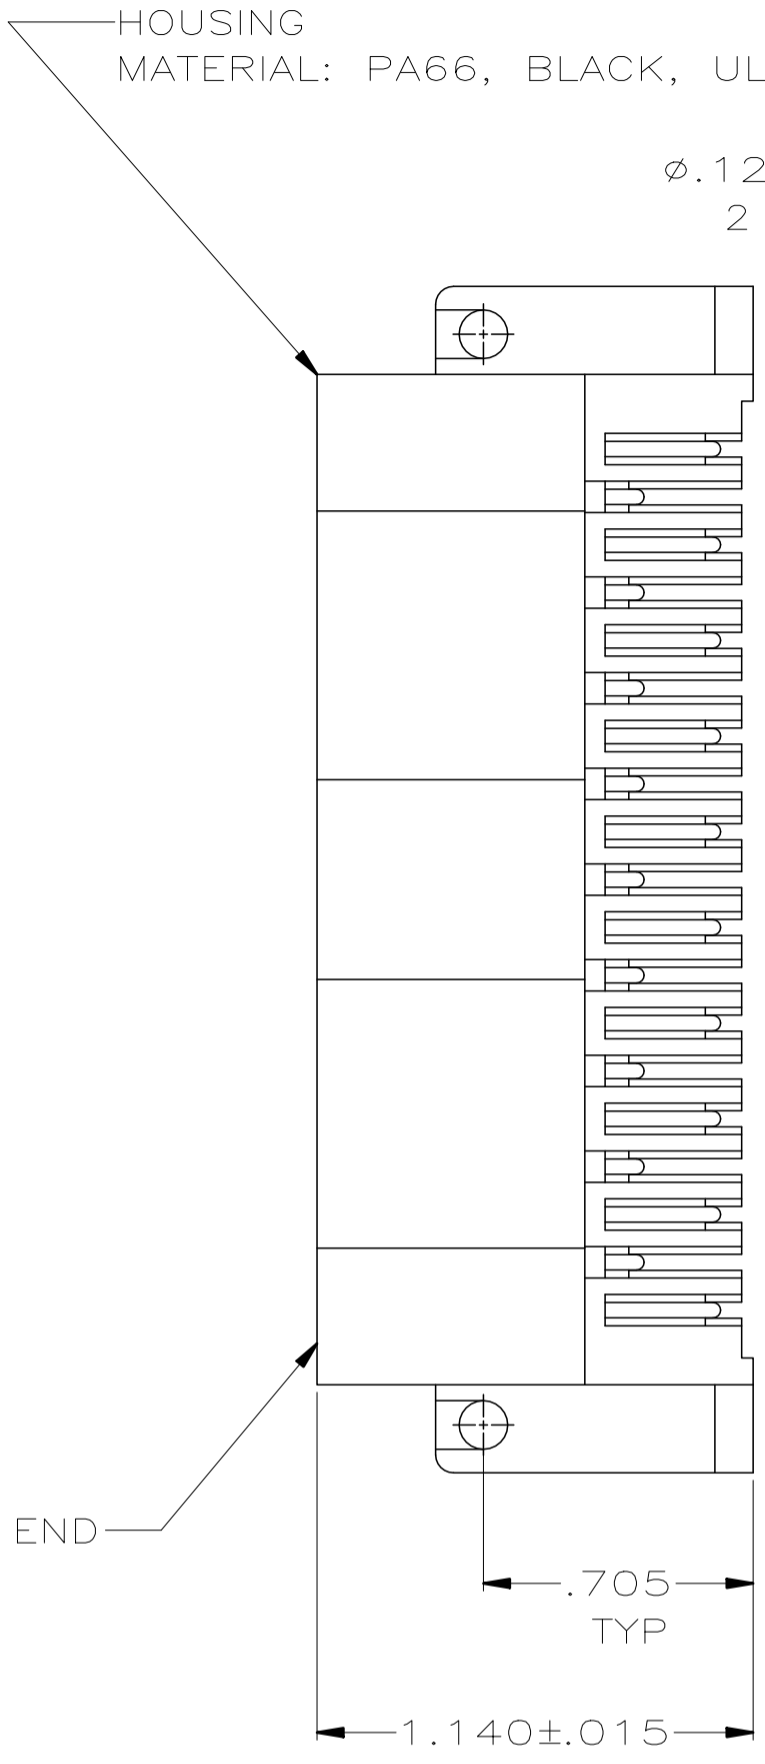


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - TE Connectivity ALL RIGHTS RESERVED.

| REVISIONS |     |                           |           |     |      |
|-----------|-----|---------------------------|-----------|-----|------|
| P         | LTR | DESCRIPTION               | DATE      | DWN | APVD |
| G         |     | REVISED PER ECO-20-001083 | 30JAN2020 | SM  | MZ   |
| E1        |     | REVISED PER ECO-09-020689 | 25AUG09   | KK  | AEG  |
| F         |     | REVISED PER ECO-18-000439 | 18JAN2018 | RS  | MZ   |

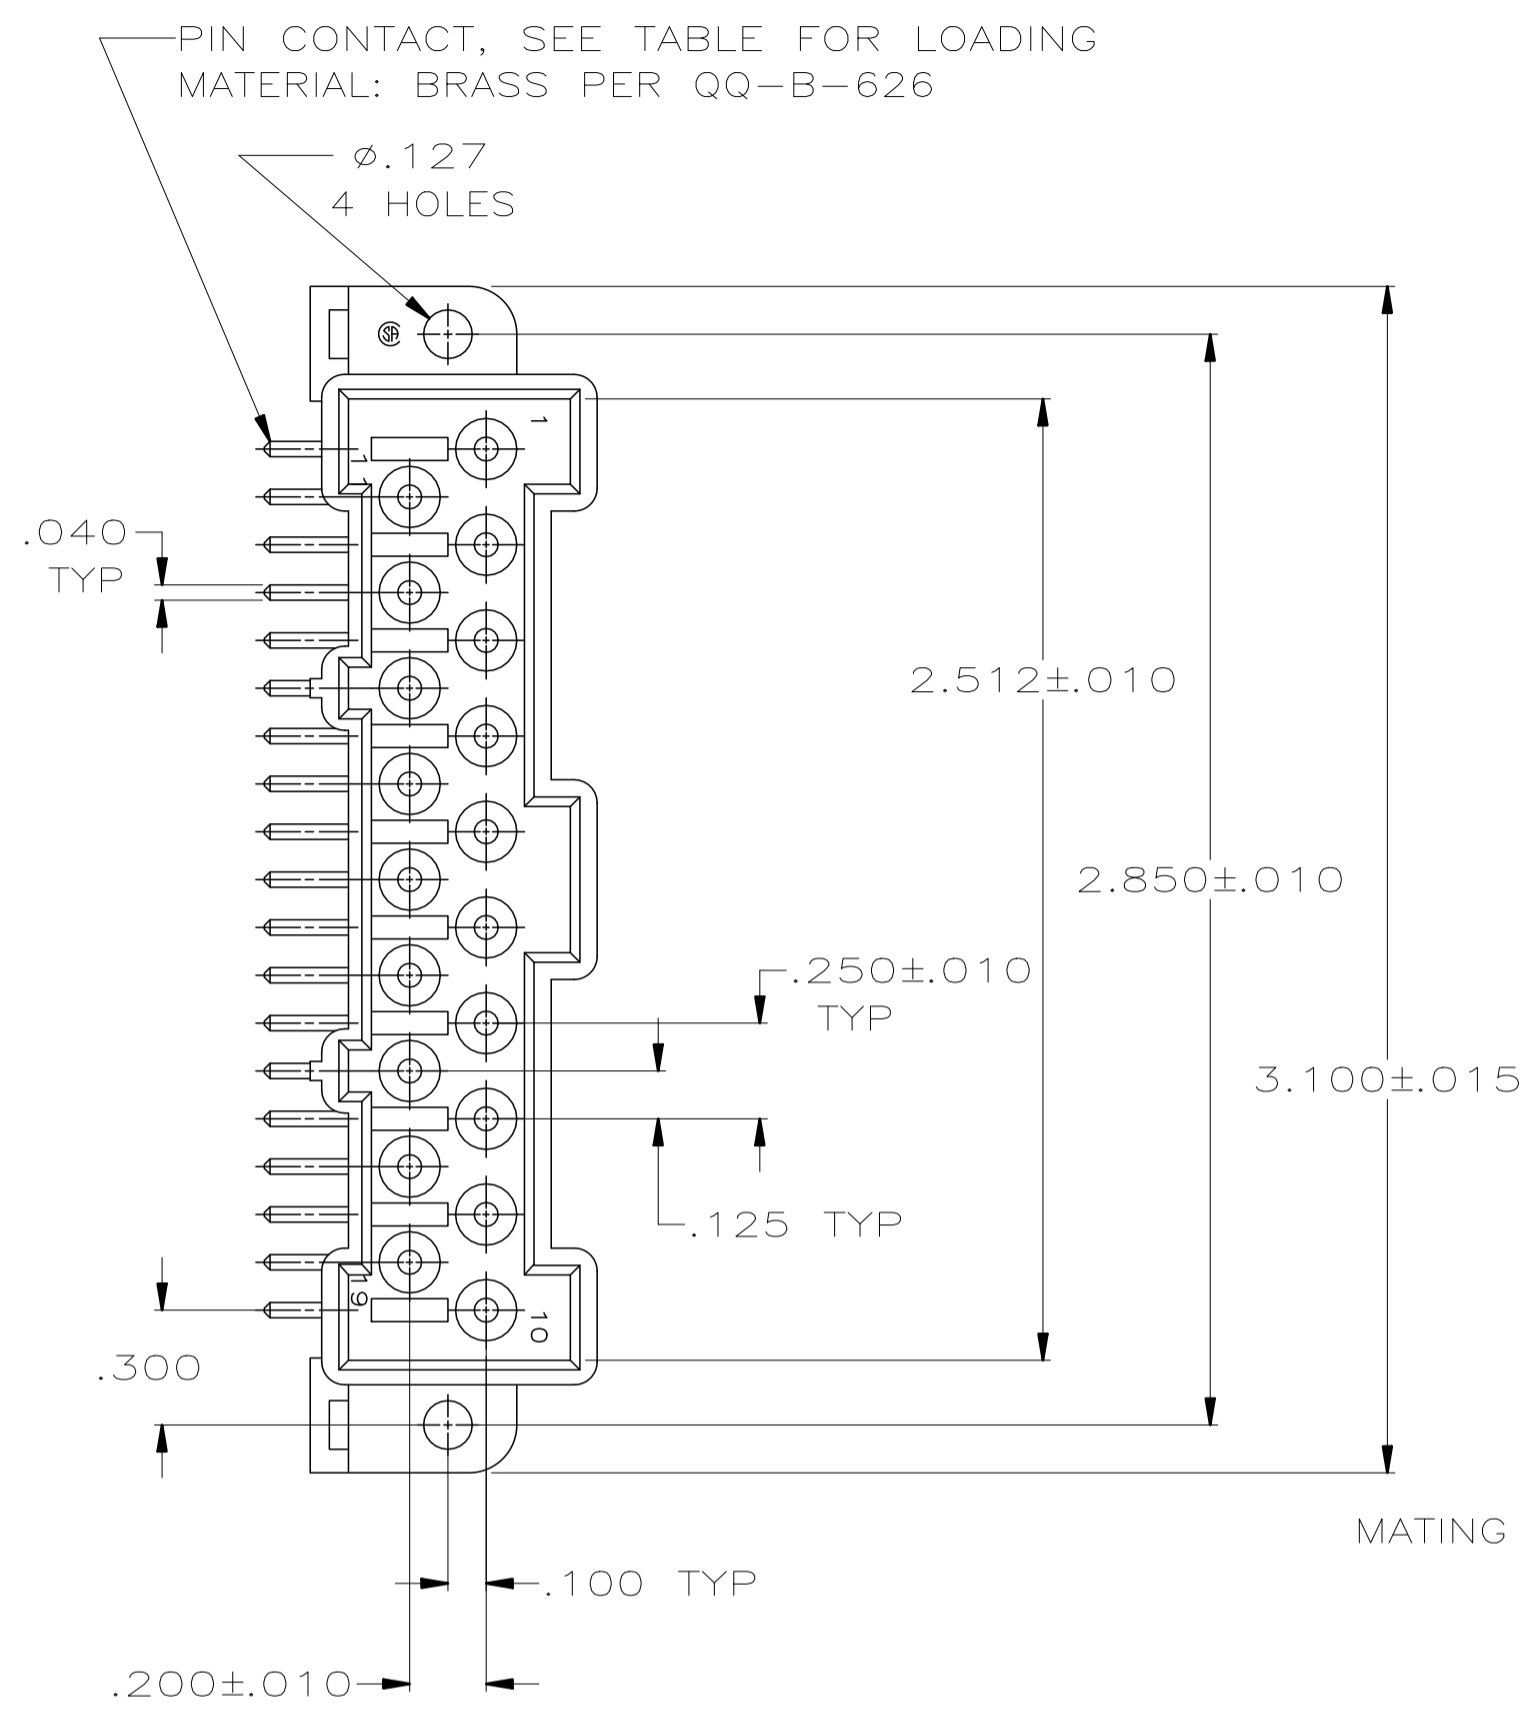

- ① PLATED WITH .000030 MINIMUM GOLD FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN-LEAD ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
- ② PLATED WITH .000030 MINIMUM GOLD FOR LENGTH OF .200 MINIMUM FROM MATING END, .000150 MINIMUM TIN ON REMAINDER, ALL OVER .000050 MINIMUM NICKEL ON ENTIRE CONTACT.
- ③ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

|            |   |                    |          |
|------------|---|--------------------|----------|
| ③ OBSOLETE | ② | ALL EXCEPT 10 & 19 | 212630-6 |
| ③ OBSOLETE | ② | ALL EXCEPT 1 & 11  | 212630-5 |
|            | ② | ALL                | 212630-4 |
| OBSOLETE   | ① | ALL EXCEPT 10 & 19 | 212630-3 |
| OBSOLETE   | ① | ALL EXCEPT 1 & 11  | 212630-2 |
| OBSOLETE   | ① | ALL                | 212630-1 |

| DIMENSIONS:                            |  | TOLERANCES UNLESS OTHERWISE SPECIFIED: |  | PIN CONTACT FINISH       |  | LOADING   |  | PART NUMBER  |  |
|--|--|--|--|--------------------------|--|---|--|--------------|--|
| INCHES                                 |  | 0 PLC ± -                              |  | 1 PLC ± -                |  | 2 PLC ± -   |  | 3 PLC ± .005 |  |
| MATERIAL                               |  | FINISH                                 |  | WEIGHT                   |  | SIZE  |  | CAGE CODE    |  |
| SEE CALLOUTS                           |  | SEE TABLE                              |  | -                        |  | A2  |  | 00779        |  |
| THIS DRAWING IS A CONTROLLED DOCUMENT. |  |  |  | DWN J LIPPERT 10-19-88   |  | TE Connectivity   |  |              |  |
|  |  |  |  | CHK J McCLINTON 10-19-88 |  | PIN HEADER ASSEMBLY, 19 POS IN LINE, RIGHT ANGLE, METRIMATE |  |              |  |
|  |  |  |  | APVD -                   |  | DRAWING NO C-212630   |  |              |  |
|  |  |  |  | PRODUCT SPEC -           |  | RESTRICTED TO -   |  |              |  |
|  |  |  |  | APPLICATION SPEC -       |  | SCALE 2:1 SHEET 1 of 1 REV G                                |  |              |  |
|  |  |  |  | MATERIAL                 |  | CUSTOMER DRAWING  |  |              |  |