







| REVISIONS | | | | |
|-----------|-----|---------------------------|-----------|-------|
| REV | LTN | DESCRIPTION | DATE | APVD |
| B | | REVISED PER ECO-14-013272 | 08SEP2014 | AP DD |

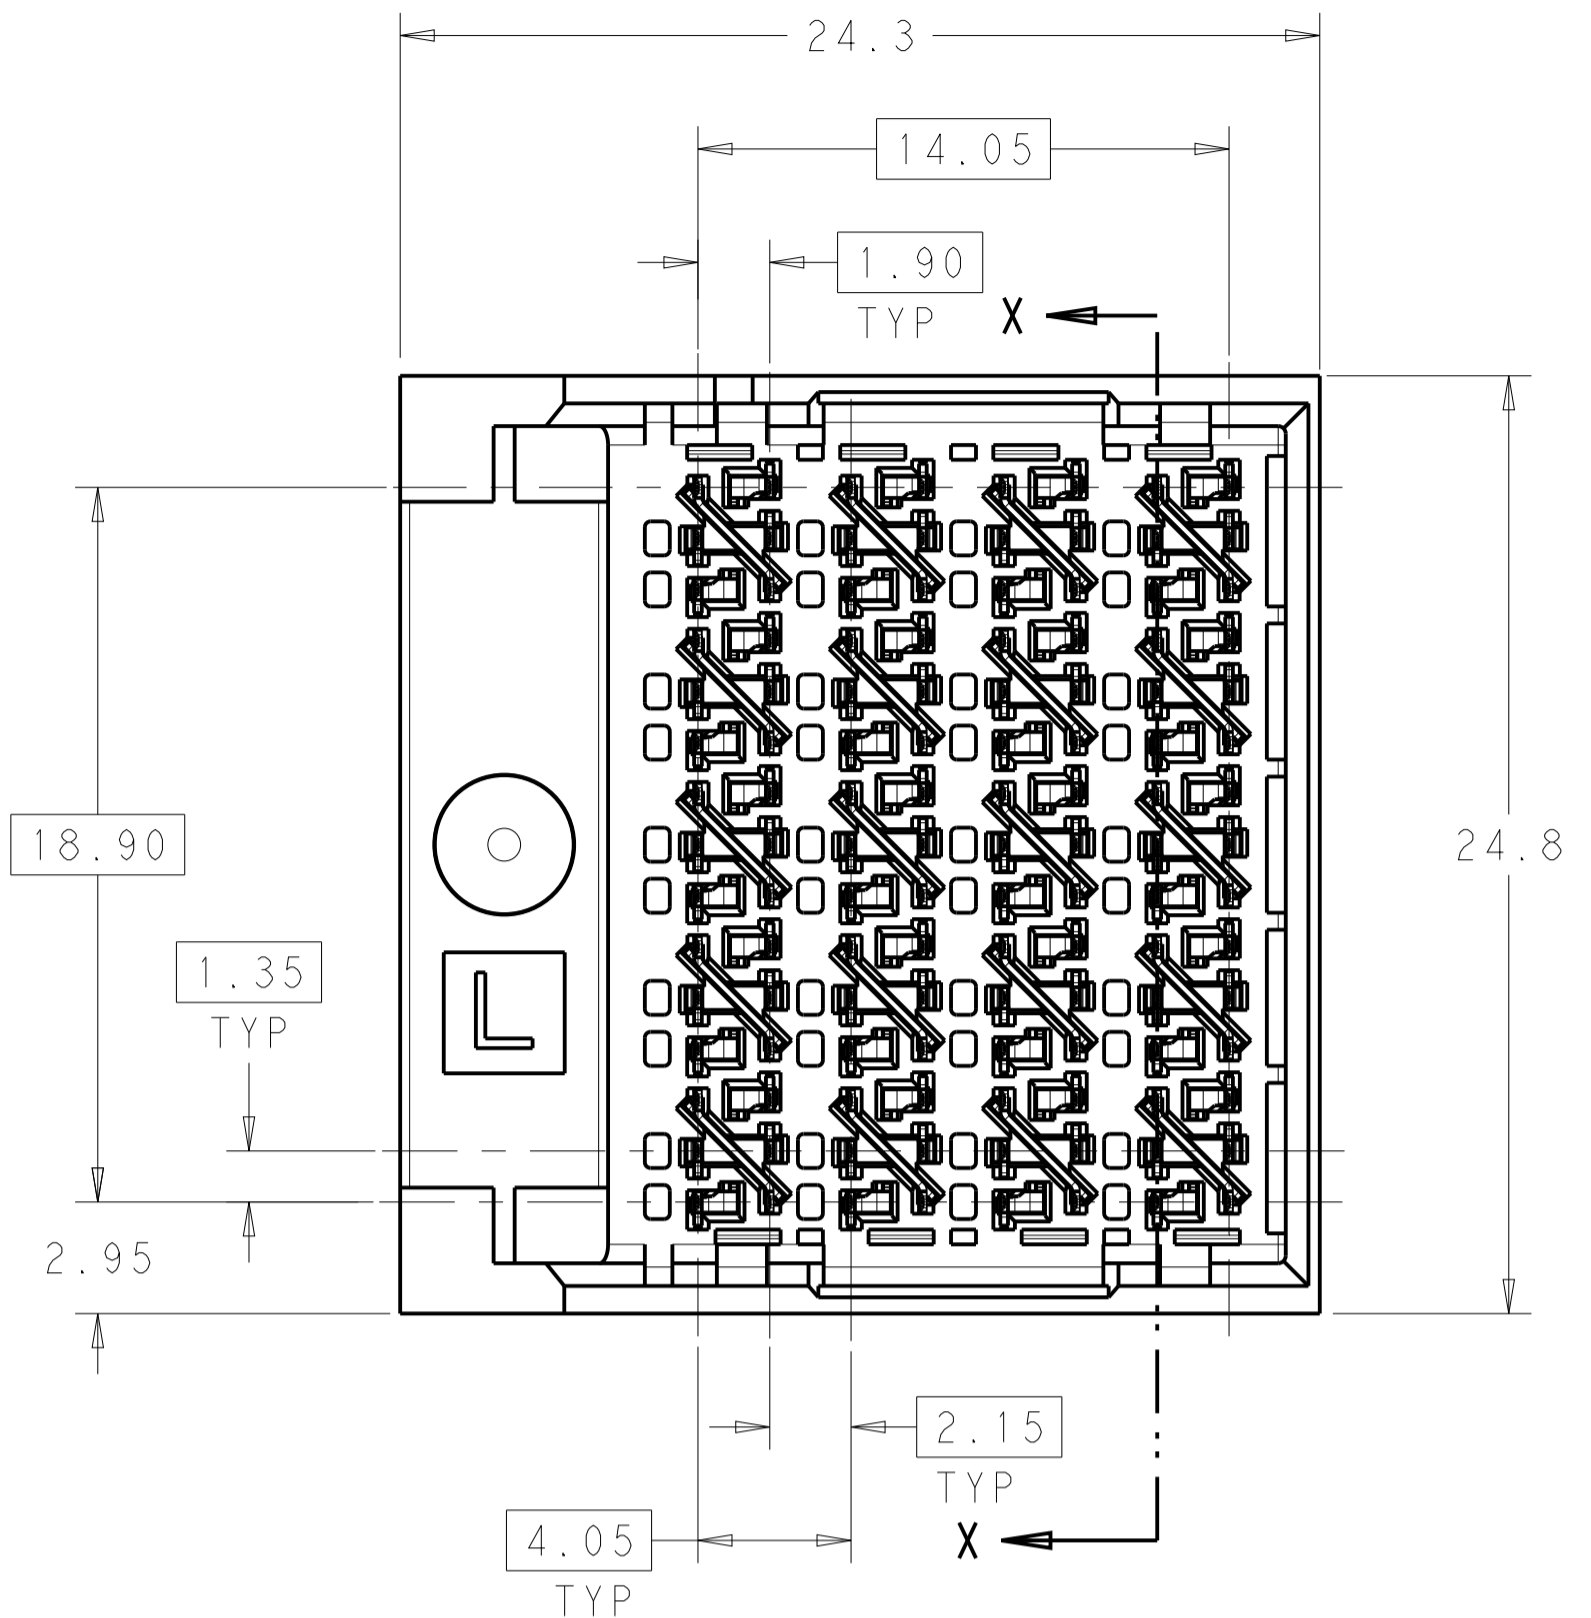

NOTCH DESIGNATES ROW A

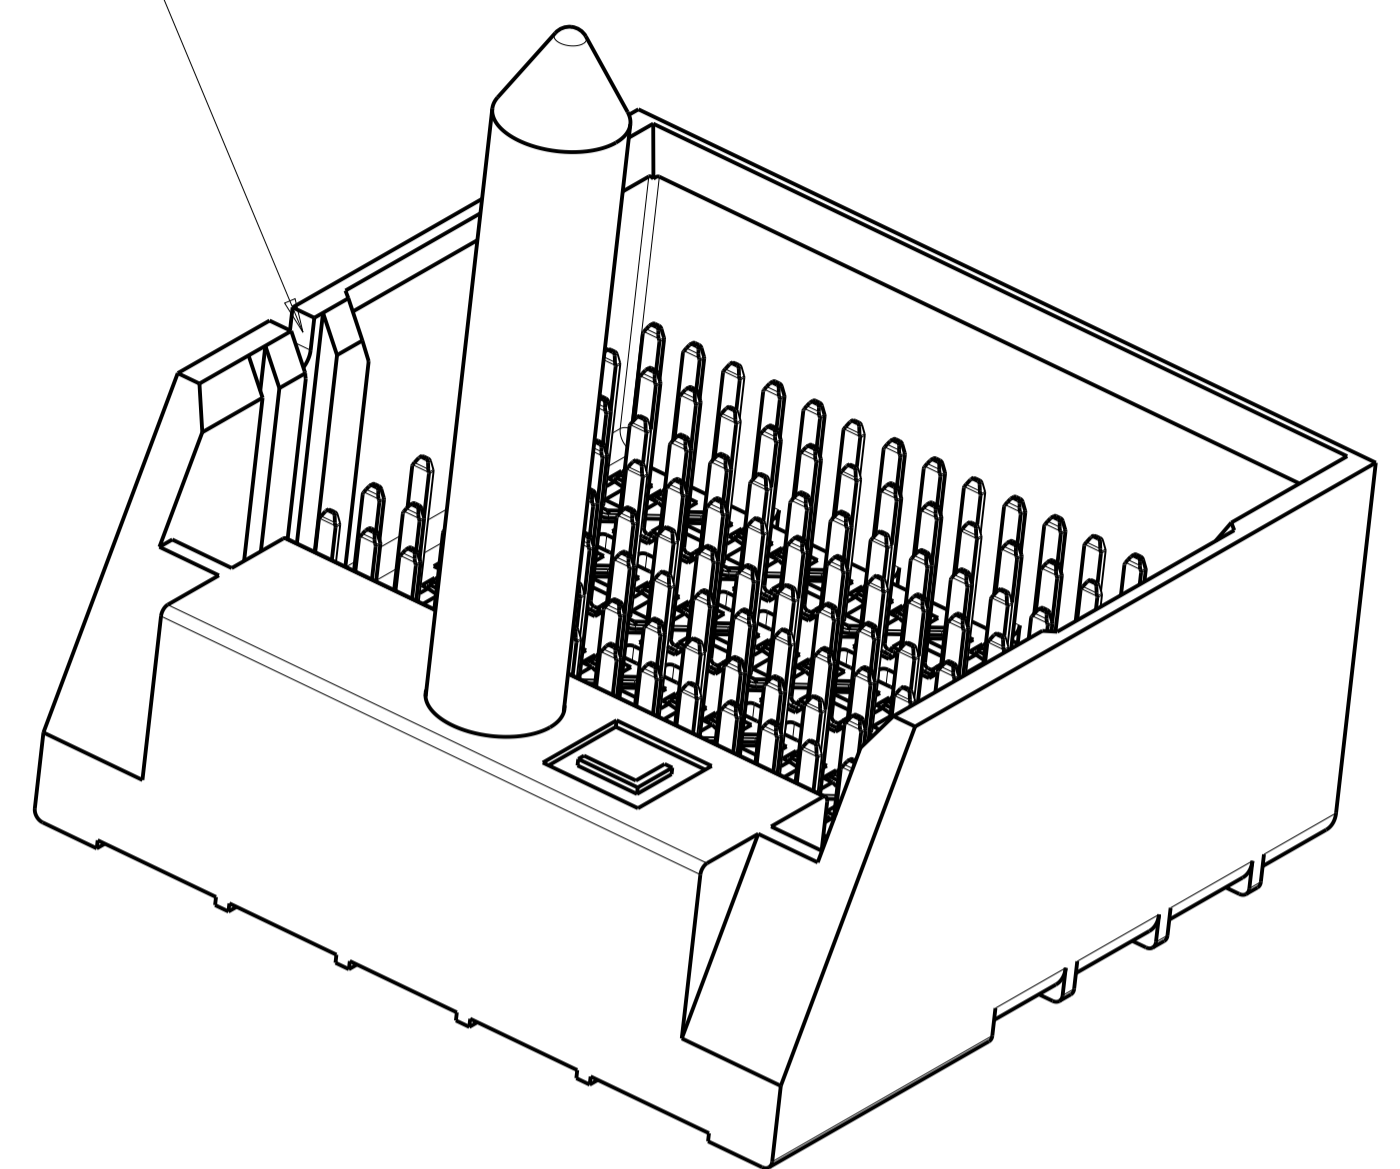

- 1 MATERIAL:
HOUSING: LCP, GLASS FILLED, UL94V-0.
TERMINALS: HIGH PERFORMANCE COPPER ALLOY.
- 2 FINISH:
30µ" MIN GOLD IN CONTACT AREA. SELECTIVE TIN ON PCB TAILS, NICKEL OVERALL.
- 3. SCREWS PACKAGED IN END OF PACKAGING TUBE.
- 4 FOR GROUNDED GUIDE PIN USE Ø3.56±0.08 PTH, Ø3.66 DRILL, AND Ø6.5 PAD.

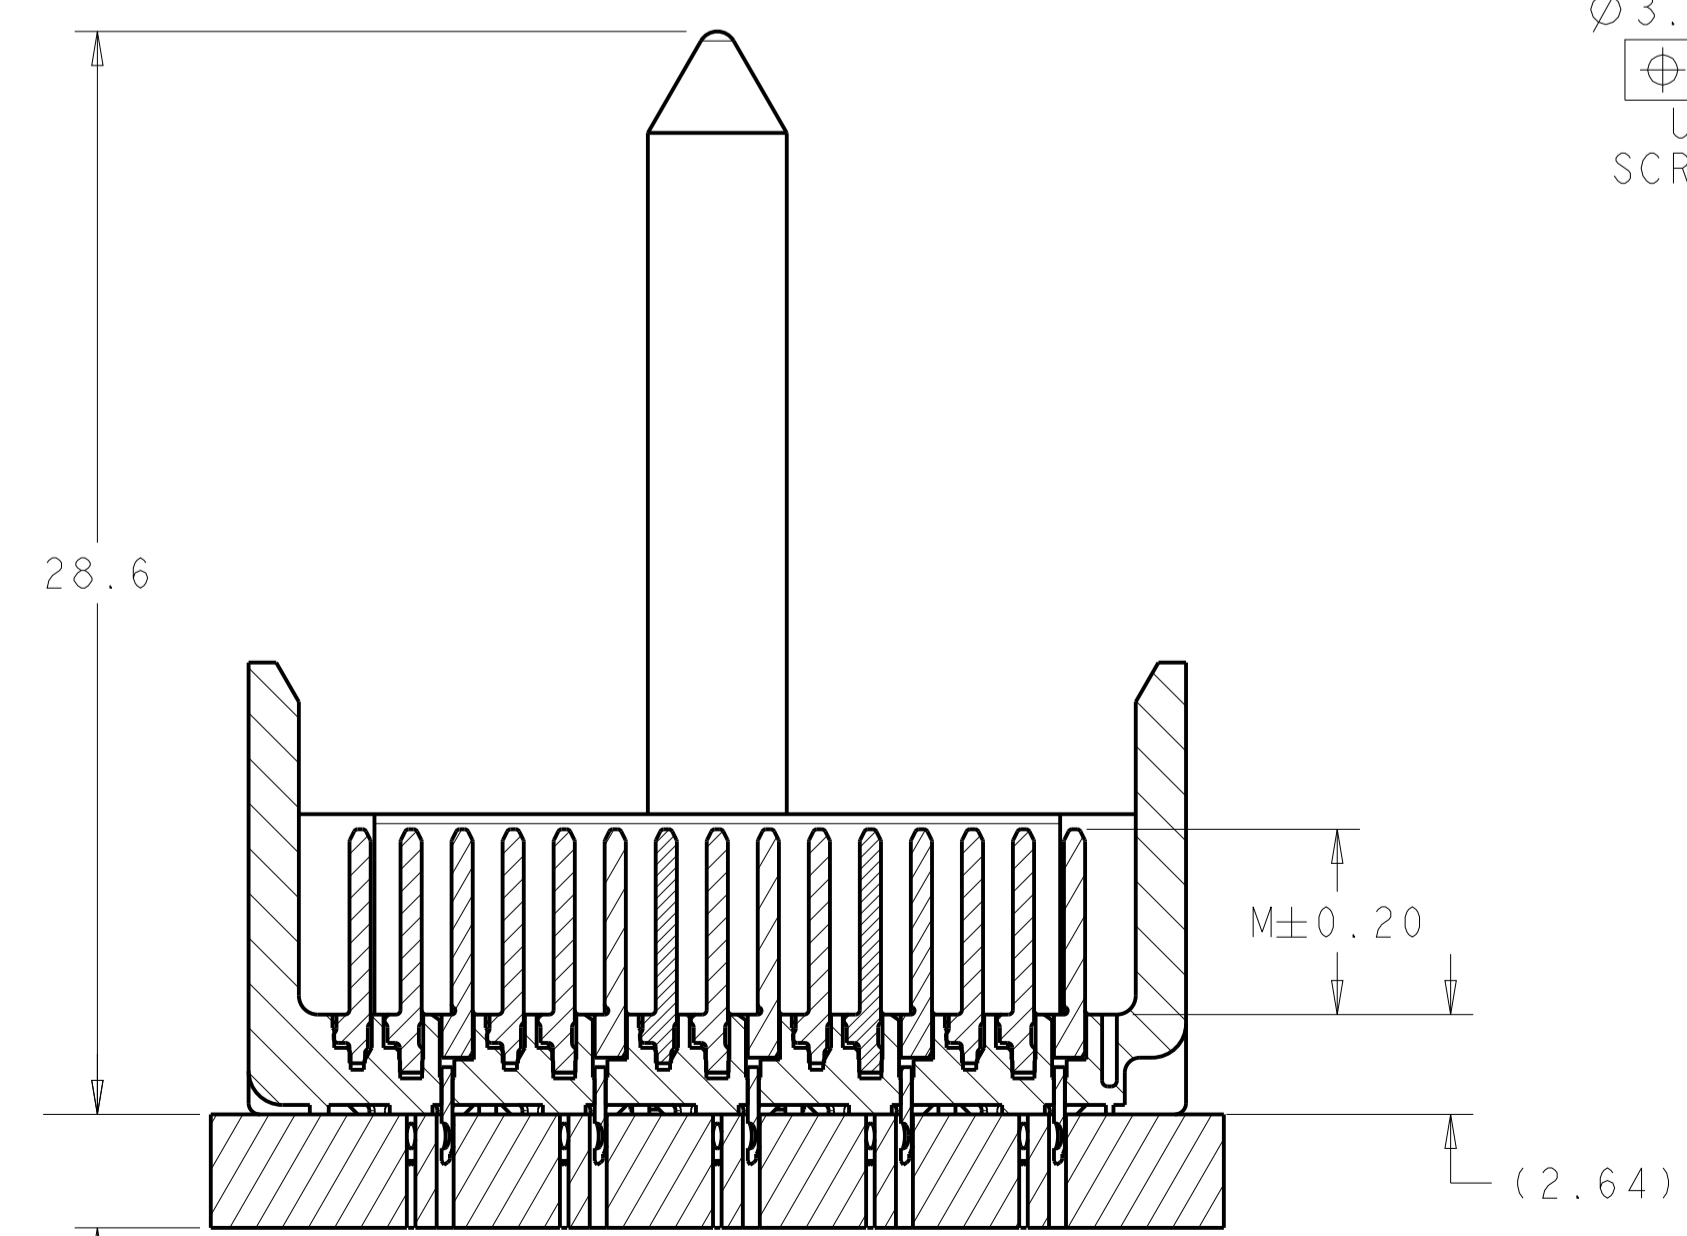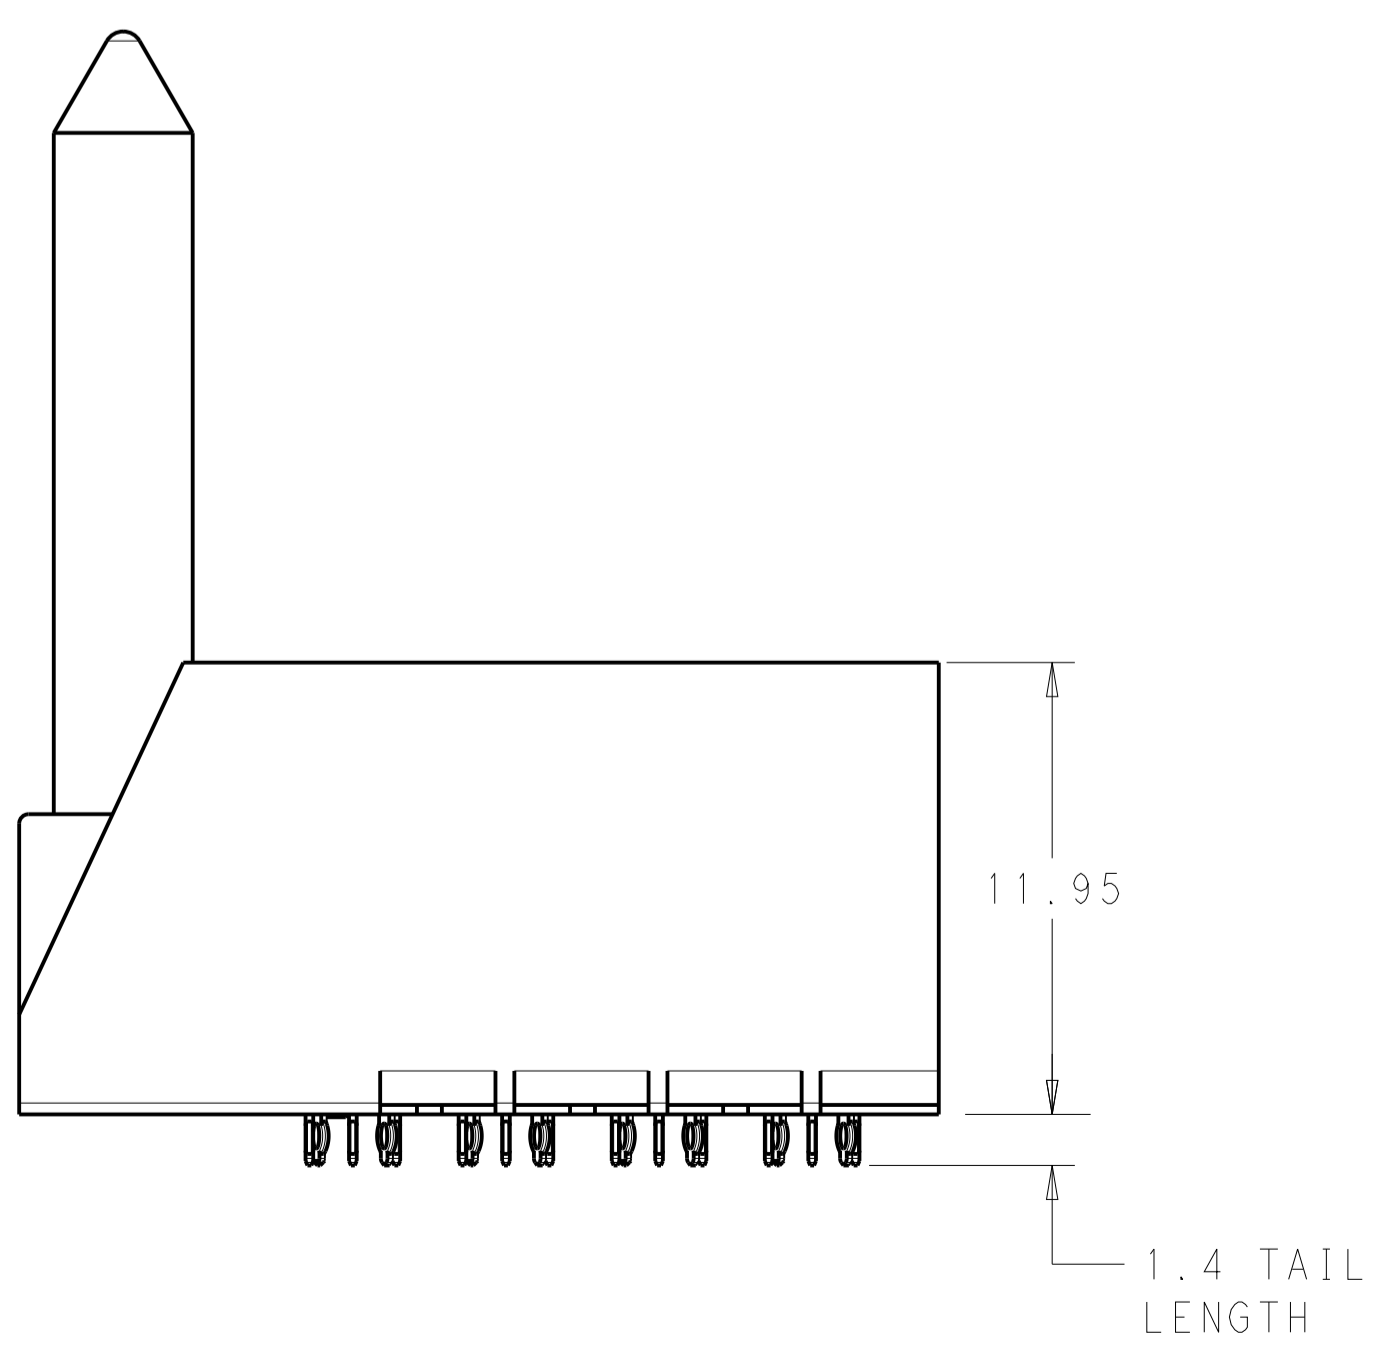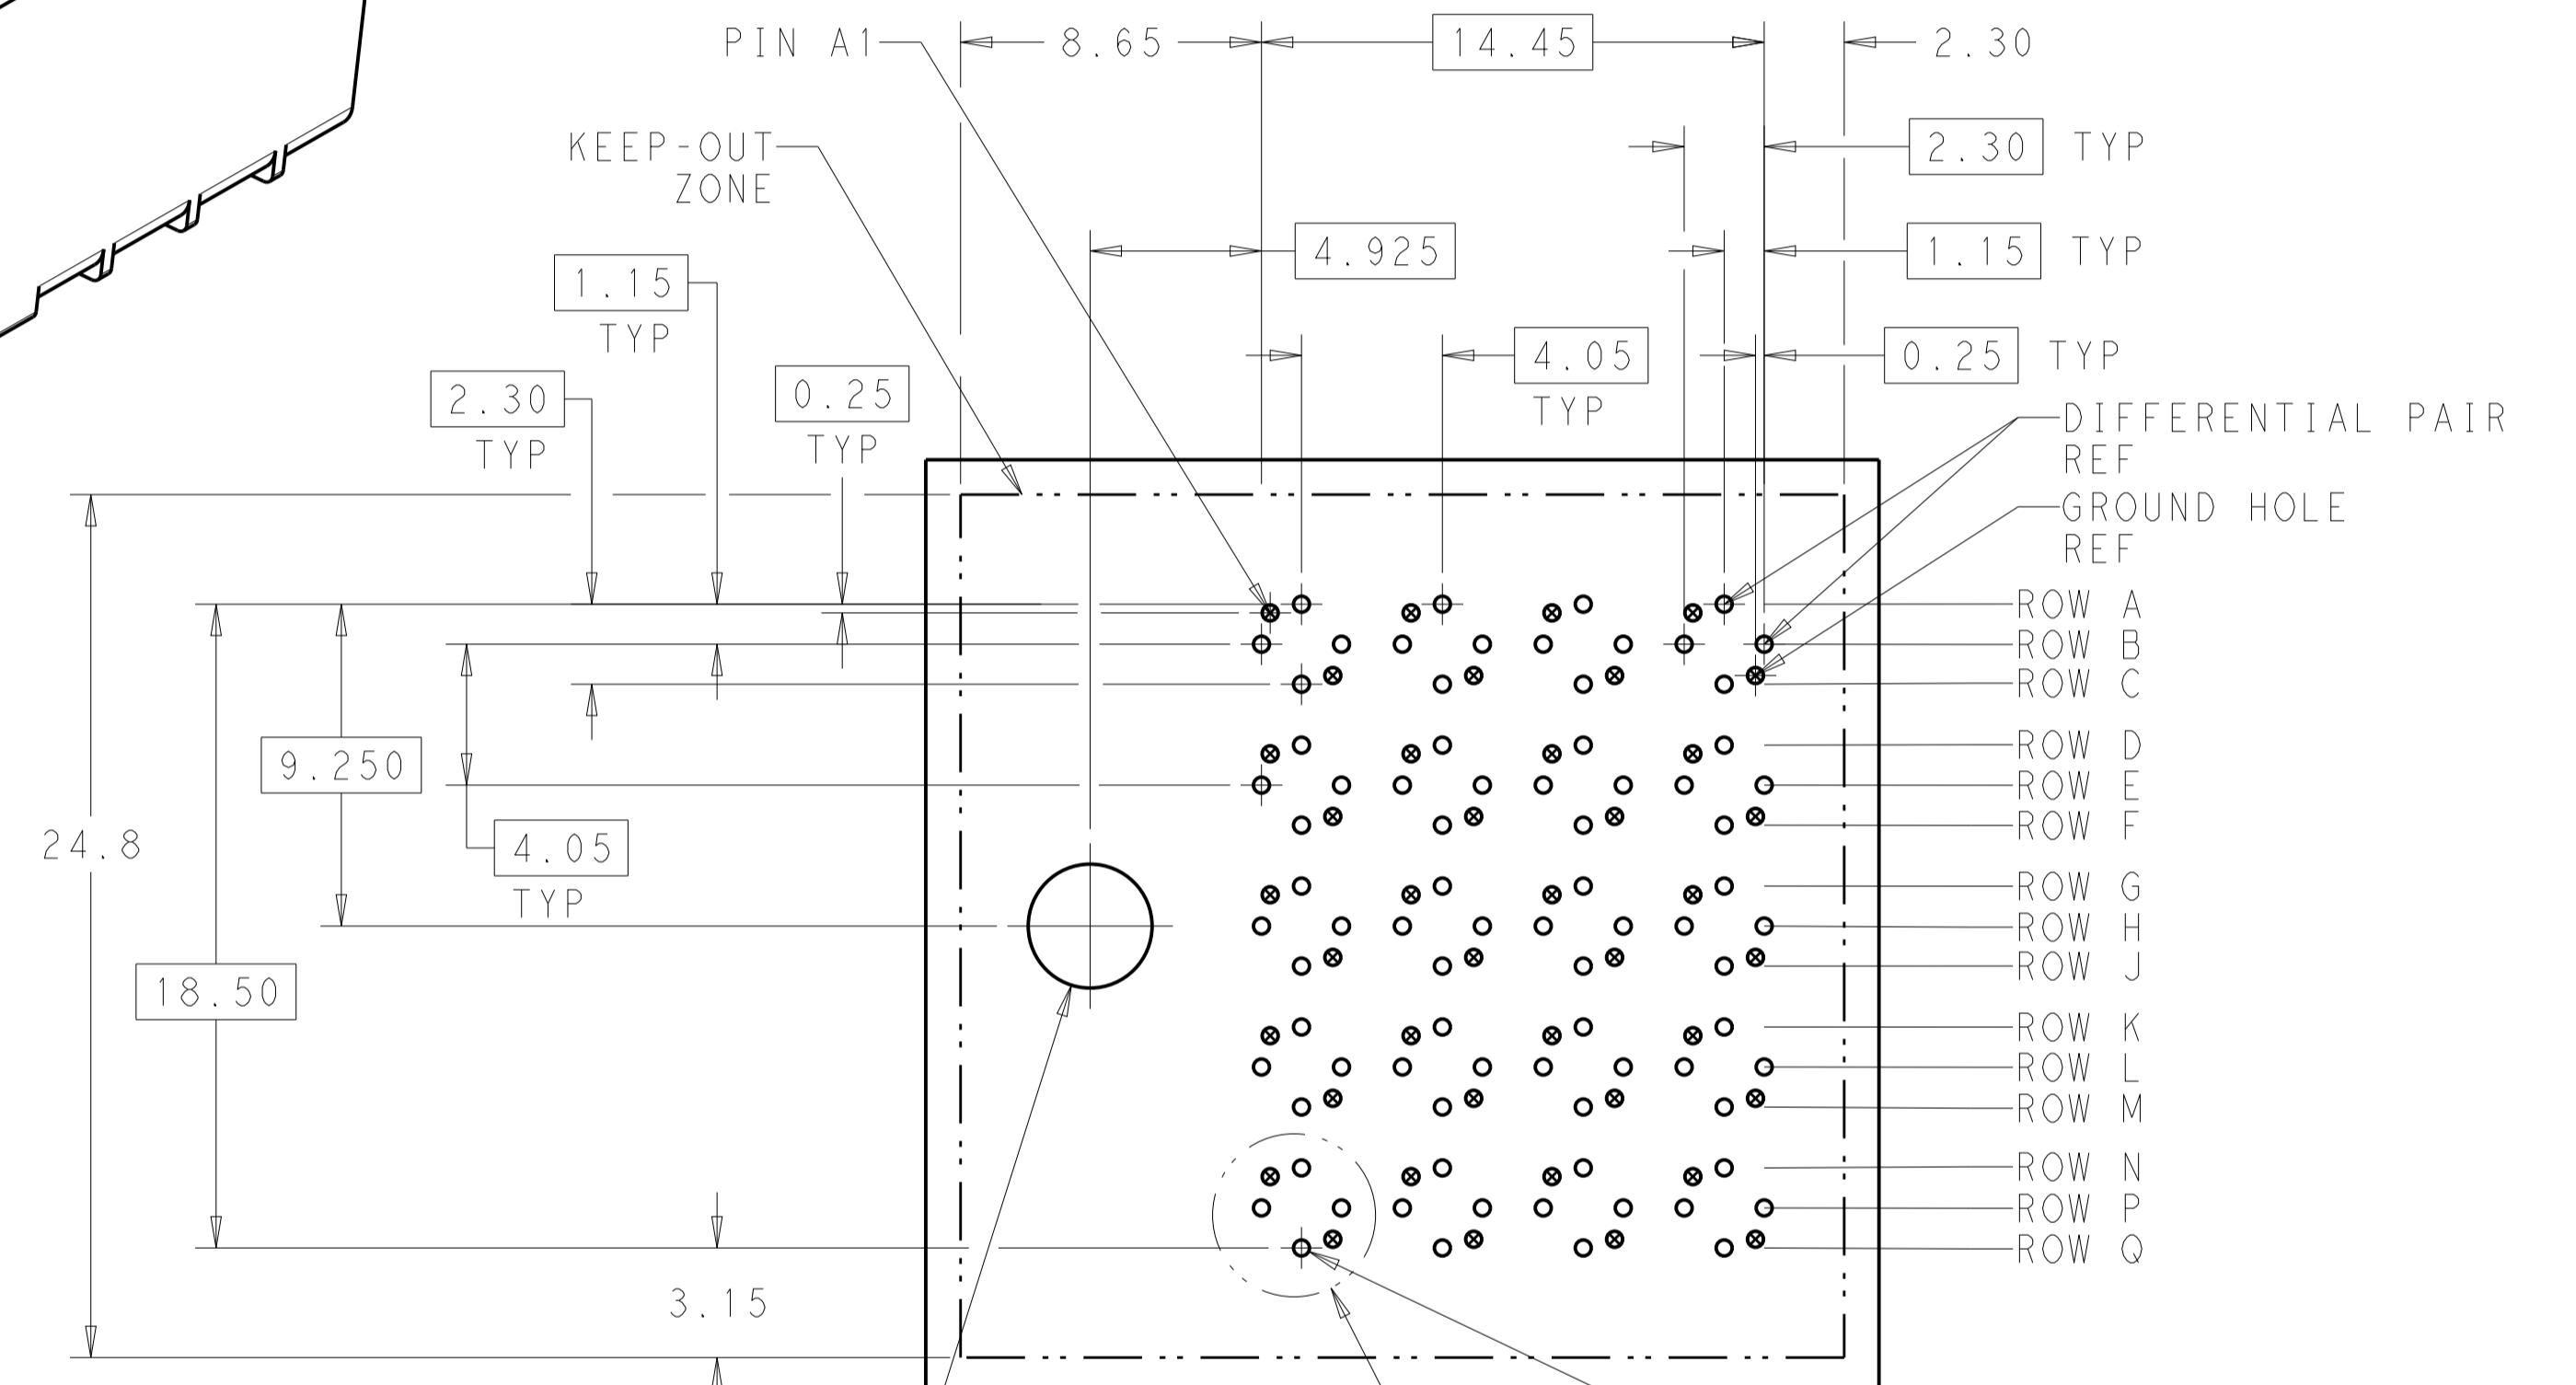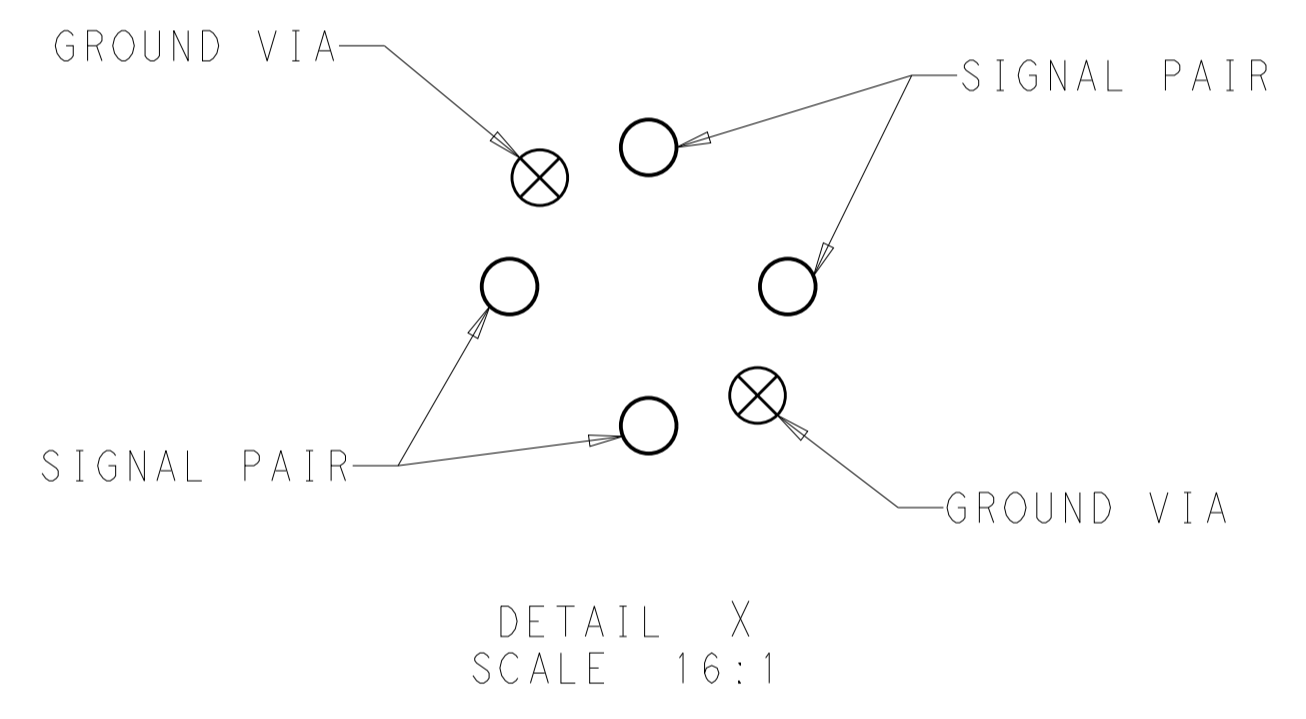

3.00 MINIMUM BOARD THICKNESS

REFER TO WWW.TE.COM FOR PRODUCT AVAILABILITY

| | | |
|-------------|-----|-----------|
| FINISH | 5.5 | 2143552-2 |
| DIM M | 4.9 | 2143552-1 |
| PART NUMBER | | |

| | | | |
|--|--|---------------------------|--|
| THIS DRAWING IS A CONTROLLED DOCUMENT. | | OWN: KIRAN HOLH 30NOV2012 | NAME: IMPACT, ORTHOGONAL, 5 PAIR, 8 COLUMN HEADER, LEFT GUIDED, RIGHT END WALL SIGNAL MODULE, 0.46 PTH |
| DIMENSIONS: mm | TOLERANCES UNLESS OTHERWISE SPECIFIED: | CHK: D. DIXON 30NOV2012 | PRODUCT SPEC: - |
| 0 PLC ±0.25 | 1 PLC ±0.13 | APVD: D. DIXON 30NOV2012 | APPLICATION SPEC: - |
| 2 PLC ±0.13 | 3 PLC ±0.13 | SIZE: - | RESTRICTED TO: - |
| 4 PLC ±0.13 | 5 PLC ±0.13 | WEIGHT: - | SCALE: 5:1 |
| MATERIAL: - | FINISH: - | CAGE CODE: - | SHEET: 1 OF 1 |
| SEE TABLE | SEE TABLE | REV: B | REV: B |