


DO NOT SCALE
DIMENSIONS IN mm



METRIC

THIRD ANGLE
PROJECTION



NOTES:

- ① CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1,27 CENTERS. FOR CABLE REQUIREMENTS SEE APPLICATION SPECIFICATION 114-19022.
- ② INDICATION OF FIRST CABLE POSITION REFERRING TO CORRESPONDING CONTACT POSITION (BLACK INK MARKS)
- ③ SOLDER-TINES FOR 0,8^{+0,05} DIA. HOLES.
- 4) PRODUCT SPECIFICATION 108-19033

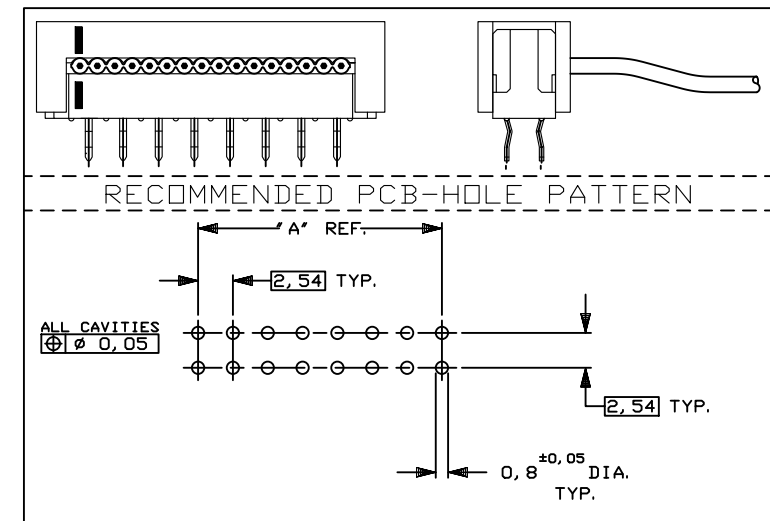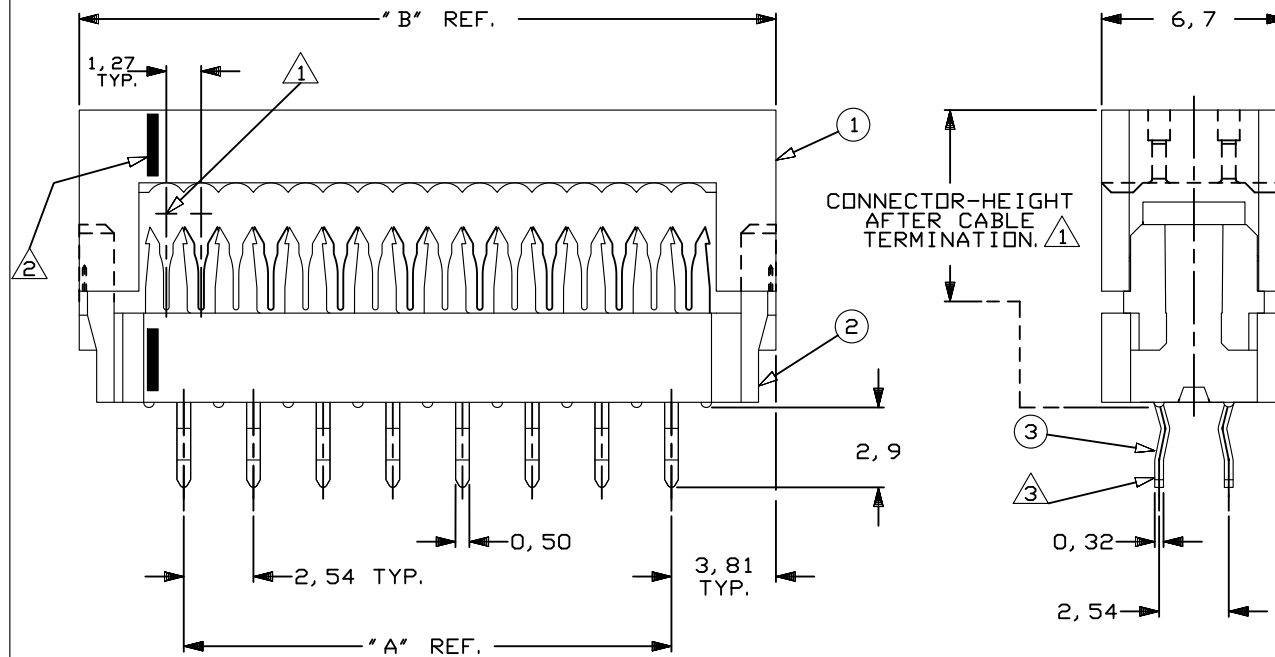

OBSELETE	86,36	78,74	64	6-216791-4	B
OBSELETE	81,28	73,66	60	6-216791-0	B
	68,58	60,96	50	5-216791-0	B
	60,96	53,34	44	4-216791-4	B
	55,88	48,26	40	4-216791-0	B
	48,26	40,64	34	3-216791-4	B
	38,10	30,48	26	2-216791-6	B
	30,48	22,86	20	2-216791-0	B
	25,40	17,78	16	1-216791-6	B
	22,86	15,24	14	1-216791-4	B
	17,78	10,16	10	1-216791-0	B
	12,70	5,08	6	216791-6	B
DIM. "B" REF.	DIM. "A" REF.	NR. OF POS.	PARTNUMBER	PART REV.	

③ CONTACTS	PHOSPHORBRONZE	3,0-5,1µm TIN WITH ENTIRE NICKEL UNDERCOATING
② HOUSING AND COVER	THERMOPLASTIC POLYESTER	GREY
① HOUSING		
COMPONENT NAME	MATERIAL	PLATING / COLOUR
CUSTOMER DRAWING FOR REFERENCE ONLY WILL NOT BE UPDATED		
C COPYRIGHT 19- BY TE HOLLAND B.V. ALL INTERNATIONAL RIGHTS RESERVED. TE PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN AND/OR PATENTS PENDING. THIS DRAWING IS UNPUBLISHED RELEASED FOR PUBLICATION, 19		
STE TE Connectivity		
NAME AMP-LATCH 2.54 DIL-PLUG CONNECTOR WITH RETENTION FEATURE.		
DR. R. HOGVEEN. DATE: 06-11-89	CHK. R. VERSTIJNEN. DATE: 09-11-89	APP. L. V. SOEST. DATE: 09-11-89
DWG. No. C-216791	REV. LTR. C	SHEET 1 OF 1