


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A2	REVISED PER ECR-23-173068	13DEC2023	P.C	D.Z

D

C

B

A

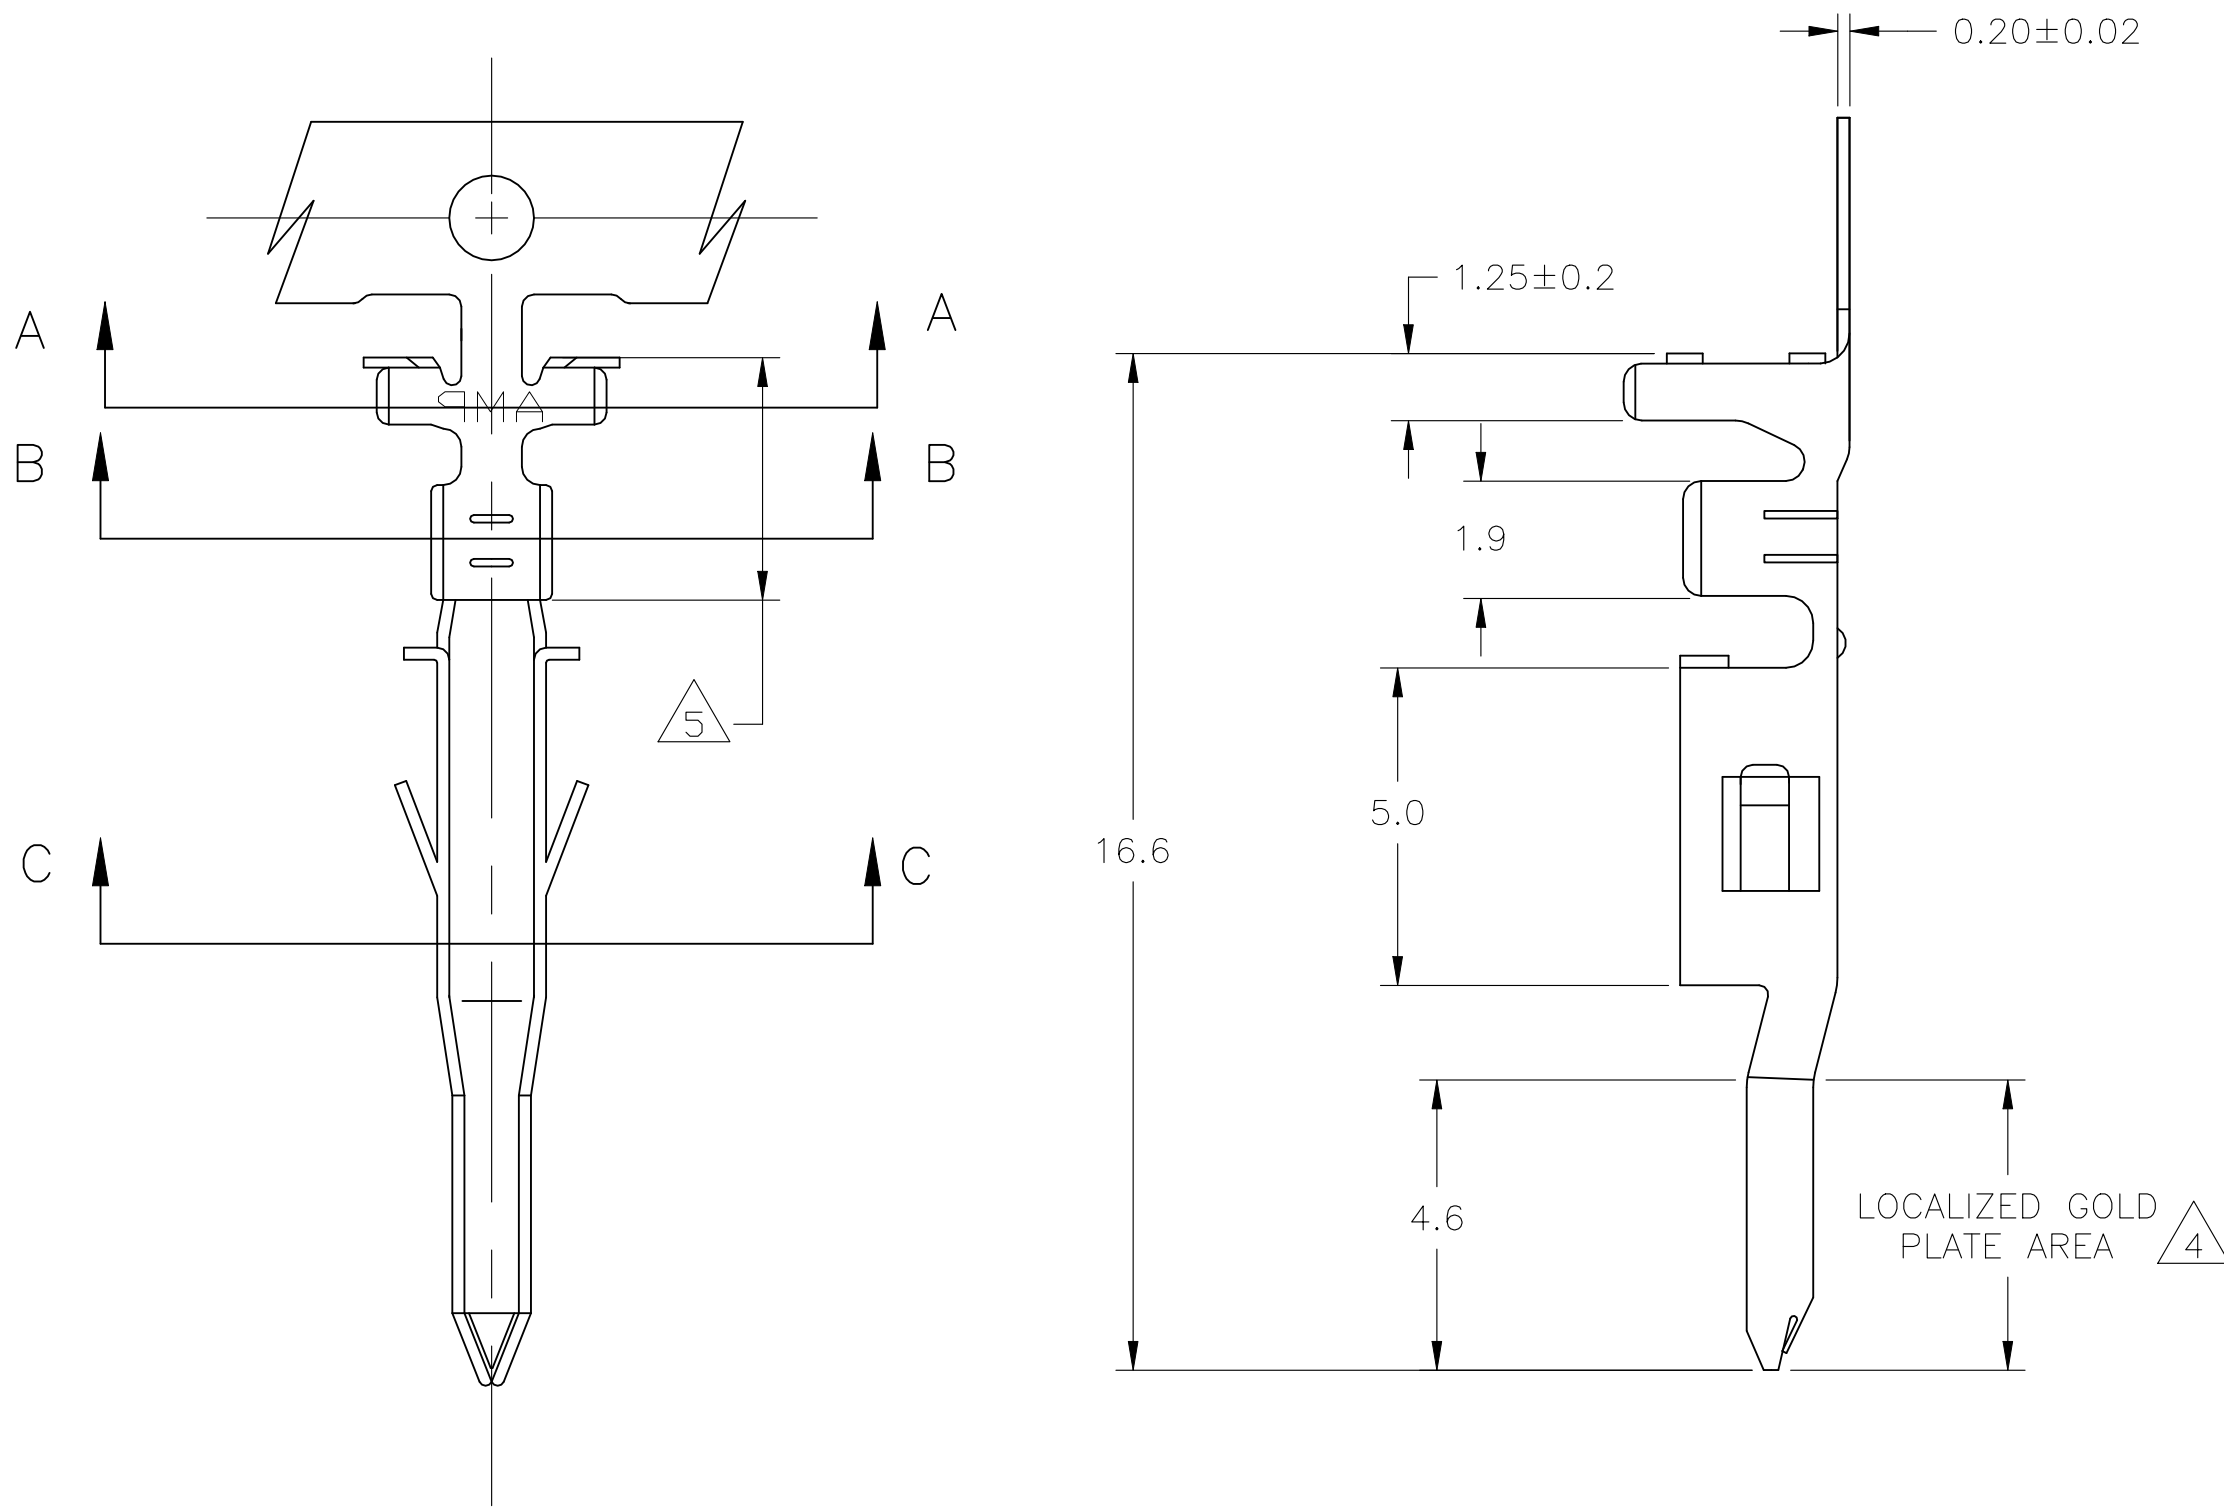

- 1 WIRE RANGE 0.3–0.82mm² [22–18 AWG]
- 2 INSULATION RANGE 1.50–3.10
- 3 FINISH: 1.27µm MIN NICKEL ALL OVER
- 4 FINISH: 0.76µm MIN GOLD ON INNER SURFACE, PERMITTED ON OUTER SURFACE.
- 5 FINISH: 2.54µm MIN TIN ON ALL SURFACES IN THIS AREA.
- 6 FINISH: 2.54µm MINIMUM PRE-TIN OVERALL
- 7 PRELIMINARY PART – NOT RELEASED FOR PRODUCTION
THIS PRODUCT HAS NOT COMPLETED QUALIFICATION TESTING

D

C

B

A

SECTION A-A

SECTION B-B

SECTION C-C

PRE-TIN 6	HIGH PERFORMANCE COPPER ALLOY	7 2238016-5
GOLD 3 4	PHOS BRONZE	7 2238016-4
PRE-TIN 6	PHOS BRONZE	7 2238016-3
GOLD 3 4	BRASS	7 2238016-2
PRE-TIN 6	BRASS	2238016-1
FINISH	MATERIAL	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]

MATERIAL
SEE TABLE

SEE TABLE

TOLERANCES UNLESS OTHERWISE SPECIFIED:

0 PLC ± -
1 PLC ± 0.3
2 PLC ± 0.10
3 PLC ± -
4 PLC ± -
ANGLES ± -
FINISH

SEE TABLE

DWN
JR. RUTH
10MAY2013

CHK
K. RANDOLPH
09MAY13

APVD
K. RANDOLPH
09MAY13

PRODUCT SPEC
108-2112

APPLICATION SPEC
114-13172

WEIGHT
-

CUSTOMER DRAWING

TE Connectivity

NAME
PIN TERMINAL,
VAL-U-LOK

SIZE
A2

CAGE CODE
00779

DRAWING NO
C-2238016

RESTRICTED TO
-

SCALE
8:1

SHEET
1 OF 1

REV
A2